

# YETDA INDUSTRY LTD.

# 3mm Super Bright Blue Led Lamps S300TB1G-C

3mm with Super Bright Blue Dice ° Encapsulated with Water Clear Package ° Long Leads

#### Absolute Maximum Ratings:

Parameter	Maximum Rating	Unit			
Peak Forward Current	120	mA			
Continuous Forward Current	30	mA			
Operating Temperature Range	$-20^{\circ}\text{C}$ to $+75^{\circ}\text{C}$				
Storage Temperature Range	$-40^{\circ}\text{C}$ to $+100^{\circ}\text{C}$				
Lead Soldering Temperature	260°C for 3 seconds				
	1.6mm(0.063 inch) from body				

### Electro-Optical Characteristics ( $Ta = 25^{\circ}C$ )


Parameter Radiant	Test Condition	Symbol	Min.	Тур.	Max.	Unit
Forward Voltage	If = 20mA	Vf		3.20	3.80	V
Reverse Current	Vr = 5V	Ir			10	uA
Luminous Intensity	If = 20mA	Iv	800	1500	2500	mcd
Spectral Bandwidth	If = 20mA	Δλ		20		nm
Wavelength	If = 20mA	λp				nm
		λd	465	470	475	nm
Half View Angle	If = 20mA	2 <b>0</b> 1/2		80		deg

#### Package

26.0

MIN.

Unit: mm

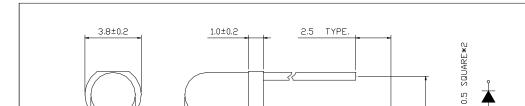

5.3±0.2

Item: 300

3.0±0.2

# YETDA INDUSTRY LTD.

### Typical Electro-Optical Characteristics Curve:

Fig 1. Forward Current vs. Forward Voltage

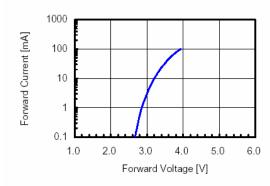


Fig 3. Forward Voltage vs. Temperature

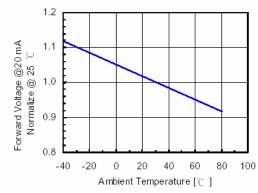


Fig 5.Relative Intensity vs. Wavelength

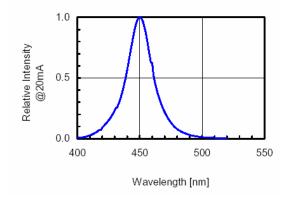


Fig 2. Relative Intensity vs. Forward Current



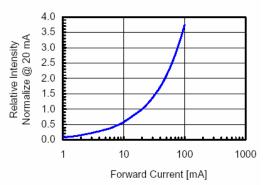


Fig 4. Relative Intensity vs. Temperature

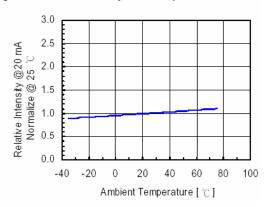

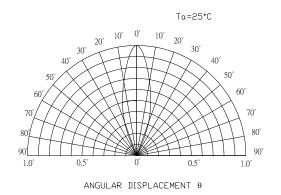

## YETDA INDUSTRY LTD.

#### • Soldering:


#### 1. Manual of soldering

The temperature of the iron tip should not be higher than 260°C and Soldering within 3 seconds per solder-land is to be observed

2. DIP soldering (Wave Soldering):

Preheating:  $120^{\circ}\text{C} \sim 150^{\circ}\text{C}$  within 5 sec.  $260^{\circ}\text{C}$  (Max)

Gradual Cooling (Avoid quenching)

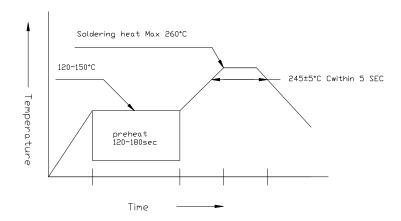


#### 3. Reflow Soldering

Preheating:  $140^{\circ}\text{C} \sim 160^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , within 2 minutes.

Operation heating:235°C (Max) within 10 seconds (Max)

Gradual Cooling (Avoid quenching)

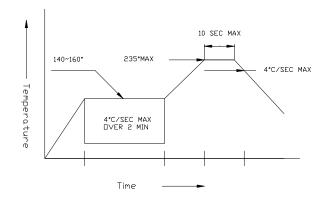

#### • Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook