



YES		NO	
-----	--	----	--

Varnish 浸漬

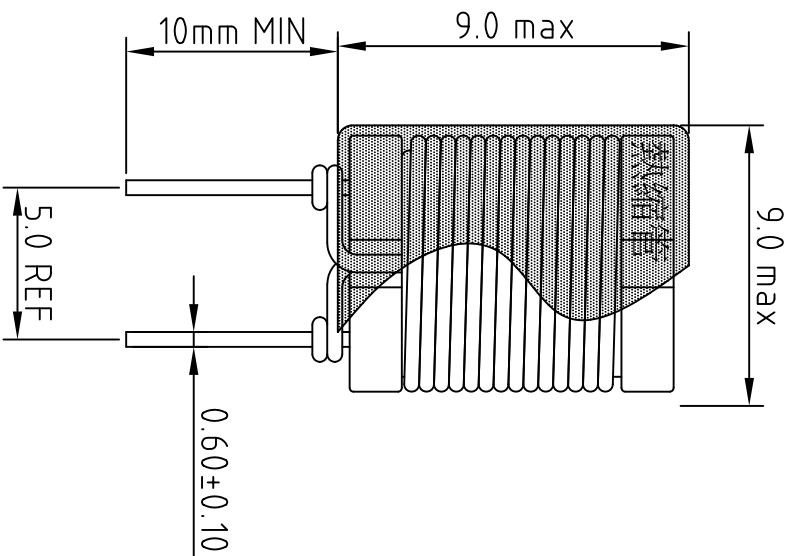

Bottom View
底視圖

底視圖BOTTOM VIEW

Unit: mm

Testing Equipment: INSTRON LCR819
Testing Condition: 1kHz @0.3V 23°C

DCR: R(S-F) = 18Ω MAX

Rate Current: 120mA

Packing: Bulk Pack

Heat Shrinkable Tube Color May not be the same

Project 投標之角	Please Sign or Stamp to approve this sample. 請簽 回或蓋印以確認樣品。
-----------------	---

Schematic

Mechanical

Part

DFC-DR7868-010-04700U-1596

Megasan

Core磁芯	K5ADR7.8X6.8(SWB3.5P5	Winding	Coil	Terminal #	Turns	L(μ H)
Bobbin骨架	N/A	1	N1	S-F 0.10	355.5 REF	4.700 $\pm$ 10%
Pins針腳數	2	2	N2	N/A	N/A	N/A
Tape膠紙	HEAT SHRINKABLE TUBE ϕ 8X9	3	N3	N/A	N/A	N/A
Wire銅線	0.10/0.5G 2UEW -F	4	N4	N/A	N/A	N/A
Date日期:	18 OCT 2012	5	N5	N/A	N/A	N/A
Draw #圖號 JRL1596	Tel: 852-2774 1323 Fax: 852-2774 1231 Contact: Jack Chan	東日磁元有限公司				

東日磁気有限公司