




Varnish 浸漬

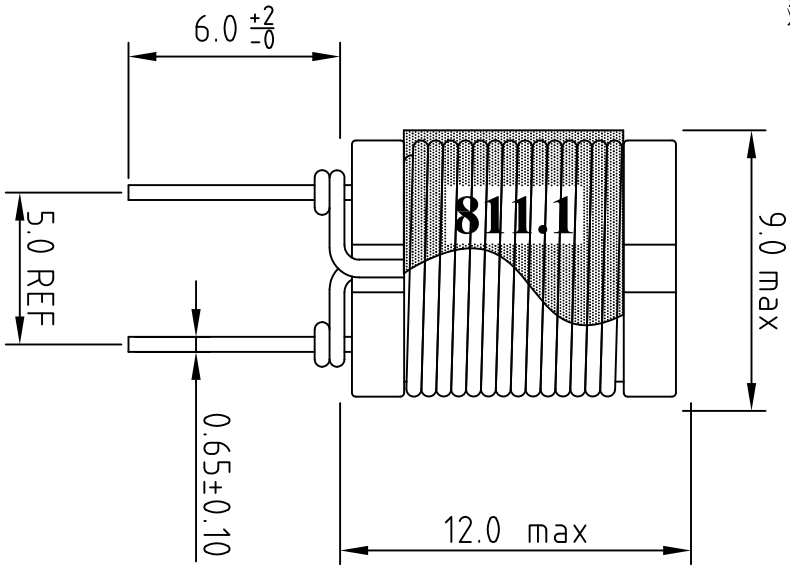

Bottom View
底視圖



Top View
頂視圖

Unit: mm

Inductance:
LCR819 @1kHz 0.30V

Enamelled Wire:


UL approved rate temperature 130°C Minimum

Customer Part Number:125-811.1

注：熱縮管至只覆蓋線包

1. 25 DEC 2010
Turns increase from 28.5 to 30.5

Proj. 投影角	Please Sign or Stamp to approve this sample.請簽回或蓋印以確認樣品。				

Schematic		Mechanical		Part #		DFC-DR810-060-00028U-14.10R1					
				Core磁心	DR2W8x10SW B4F6P5	Winding	Coil	Terminal #	Turns	L(uH)	
				Bobbin骨架	N/A	1	S-F	S-F 0.60	28 1/2 R	28±10%	
				Pins針腳數	2PINS 0.65	2	N2	N/A	N/A	N/A	
				Tape膠紙	N/A	3	N3	N/A	N/A	N/A	
				Wire銅線	0.60/1.5g 2UEW-F	4	N4	N/A	N/A	N/A	
				Date日期:	15 Oct 2010	5	N5	N/A	N/A	N/A	
Drawing #		JRL 14.10R1		Tel: 852-2774. 1323 Fax: 852-2774. 1231 Contract: Jack Chan		東日磁元有限公司					