

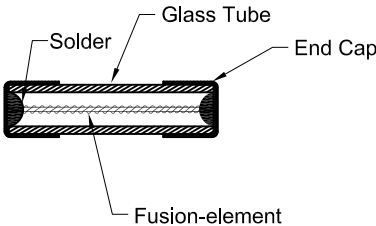


Dimensions in mm


MSG36



MSG36-PA

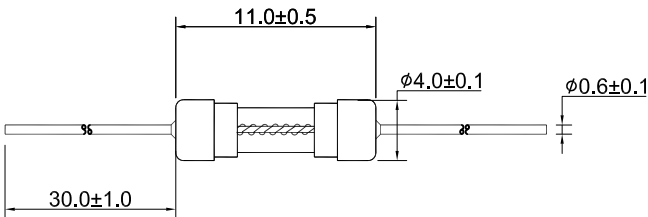

MSG36-PR

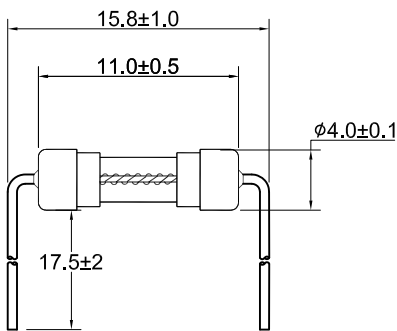

Rated Current	Breaking capacity	Rated Voltage
100mA	@125V/AC 50A @250V/AC 50A	125V/250V
125mA		125V/250V
160mA		125V/250V
200mA		125V/250V
250mA		125V/250V
300mA		125V/250V
400mA		125V/250V
500mA		125V/250V
600mA	@125V/AC 50A @250V/AC 50A	125V/250V
630mA		125V/250V
700mA		125V/250V
800mA		125V/250V
1A		125V/250V
1.25A		125V/250V
1.5A		125V/250V
1.6A		125V/250V
2A	@125V/AC 50A @250V/AC 50A	125V/250V
2.5A		125V/250V
3A		125V/250V
3.15A		125V/250V
3.5A	@125V/AC 50A @250V/AC 50A	125V/250V
4A		125V/250V
5A		125V/250V
6A		125V/250V
6.3A		125V/250V
7A		125V/250V
8A		125V/250V
10A	@125V/AC,DC 50A	125V
12A		125V
13A		125V
15A		125V

Test Specification according to Standard UL 248-1,14

Electrical Characteristic

Rated Current	100%	200%	
	Min.	Min.	Max.
I_n			
0.1A-15A	4 h	1 S	60 S

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD. TITLE Miniature Cartridge Fuse3.6x10mm Slow Blow Type PART NO. MSG36,MSG36-PA,MSG36-PR DRAWING NO. AA05062117
		DRAWN BY Allan	
		CHECKED BY	
		APPROVED BY 鄭文和	
P/N		DATE 2012.07.29	
REV	D	SCALE	