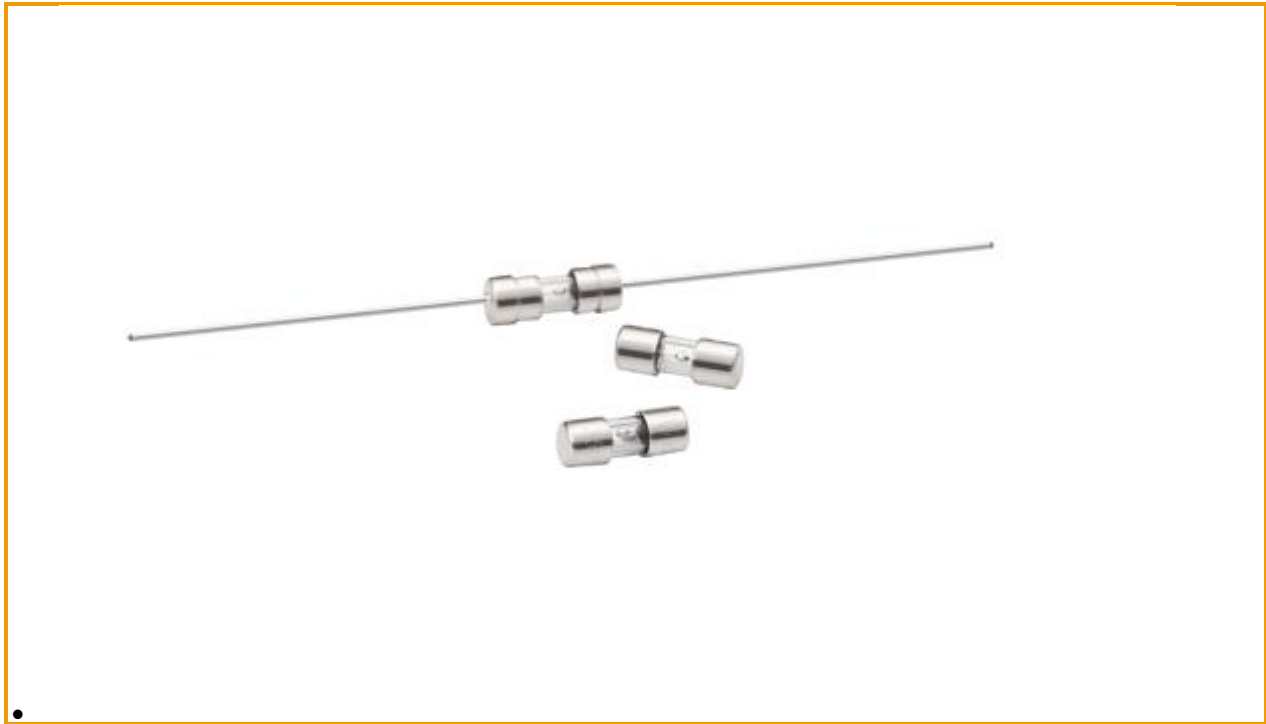


**Description:**

31S,32S, 玻璃保险丝管, 慢断型

Security Certificate:

UL/CUL/CSA

Application:

电源、电子整流器、适配器、充电器、LED照明等的电路保护

Standard:

UL 248-1, UL 248-14

Working Temperature:

-55°C~125°C

Storage Temperature:

-55°C~85°C


Resistance Welding of Antipyretic:

260°C,10s Max

Solderability:

245°C±5°C, 5s±0.5s

31S/32S 平均 I-T 曲线图 (仅供参考)

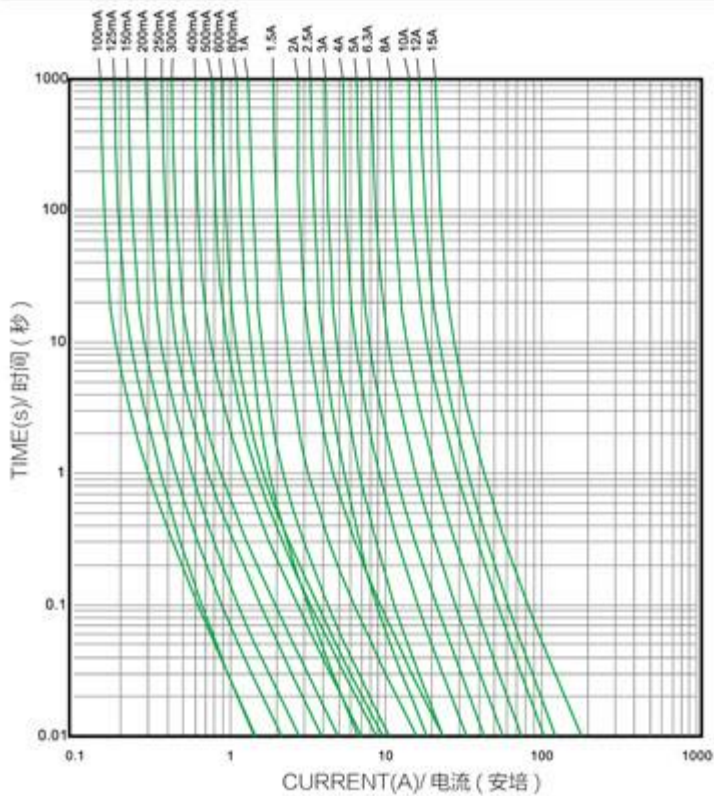


For more detailed information, please click on the contact me Division Sales Engineer

Request for SampleOrders

Dimensions/ 尺寸 :

Unit 单位: mm

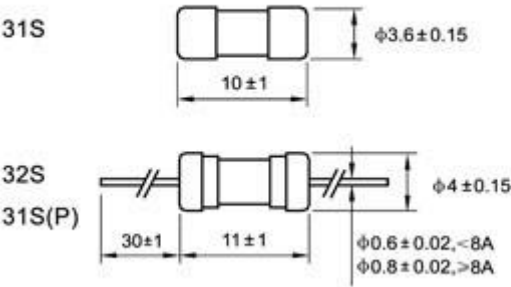

Download

-
-

31S, 32S

Φ3.6x10mm, RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (SLOW-BLOW)

INTERRUPTING CAPACITY :

50 amperes at 125V AC (100mA-15A)

50 amperes at 250V AC (100mA-15A)

TECHNICAL PARAMETERS :

CATALOG NO.	CURRENT RATING	SAFETY APPROVALS				REFERENCE (A ² .Sec.) (RoHS) I ² T
		UL/ cUL		CSA		
		H	L	H	L	
31S,32S-0100H/L	100mA		•	•		0.02127
31S,32S-0125H/L	125mA	•	•	•	•	0.02058
31S,32S-0150H/L	150mA	•	•	•	•	0.04566
31S,32S-0160H/L	160mA	•	•	•	•	0.04362
31S,32S-0200H/L	200mA	•	•	•	•	0.07841
31S,32S-0250H/L	250mA	•	•	•	•	0.1531
31S,32S-0300H/L	300mA	•	•	•	•	0.2431
31S,32S-0315H/L	315mA	•	•	•	•	0.2107
31S,32S-0350H/L	350mA	•	•	•	•	0.5416
31S,32S-0375H/L	375mA	•	•	•	•	0.5196
31S,32S-0400H/L	400mA	•	•	•	•	0.4975
31S,32S-0500H/L	500mA	•	•	•	•	0.7752
31S,32S-0600H/L	600mA	•	•	•	•	0.9302
31S,32S-0630H/L	630mA	•	•	•	•	1.623
31S,32S-0750H/L	750mA	•	•	•	•	1.508
31S,32S-0800H/L	800mA	•	•	•	•	0.4494
31S,32S-010H/L	1A	•	•	•	•	1.104
31S,32S-012H/L	1.2A	•	•	•	•	1.548
31S,32S-013H/L	1.25A	•	•	•	•	1.612
31S,32S-015H/L	1.5A	•	•	•	•	2.534
31S,32S-016H/L	1.6A	•	•	•	•	2.940
31S,32S-020H/L	2A	•	•	•	•	5.579
31S,32S-023H/L	2.25A	•	•	•	•	6.276
31S,32S-025H/L	2.5A	•	•	•	•	3.375
31S,32S-030H/L	3A	•	•	•	•	5.342
31S,32S-032H/L	3.15A	•	•	•	•	5.854
31S,32S-035H/L	3.5A	•	•	•	•	7.045
31S,32S-040H/L	4A	•	•	•	•	11.05
31S,32S-050H/L	5A	•	•	•	•	18.64
31S,32S-060H/L	6A	•	•	•	•	29.38
31S,32S-063H/L 35NM,36NM-063H/L	6.3A	•	•	•	•	32.13
31S,32S-070H/L	7A	•	•	•	•	44.28

31S,32S-080H/L	8A	•	•	•	•	56.69
31S,32S-090H/L	9A	•	•	•	•	82.90
31S,32S-100H/L	10A	•	•	•	•	109.1
31S,32S-120H/L	12A					150.7
31S,32S-150H/L	15A					337.4

● DENOTES FOR APPROVED

H DENOTES FOR 250V

L DENOTES FOR 125V

cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL

ELECTRICAL CHARACTERISTICS :

% of CURRENT RATING	BLOWING TIME
100%	4 hours Min.
200%	1-60 seconds.