



BARONS®

- 单圈的/金属陶瓷/工业用/密封
(Single Turn/Cermet/Industrial/Sealed)
- 8种引线的安装尺寸
(8 Terminal Styles)

3386型玻璃釉预调电位器 3386 Square Trimming Potentiometer

电气特性 Electrical Characteristics

标称阻值范围	50Ω—2MΩ
Standard Resistance Range	
阻值允许偏差	± 10%
Resistance Tolerance	
终端电阻	≤ 1%R或10Ω
Absolute Minimum Resistance	
接触电阻变化	CRV ≤ 3%
Contact Resistance Variation	
绝缘电阻	R _I ≥ 1GΩ(100Vac)
Insulation Resistance	
耐电压	600Vac
Withstand Voltage	
有效行程	300°
Effective Travel	


环境特性 Environmental Characteristics

额定功率	0.5W@70℃, 0W@125℃
Power Rating(315 volts max)	
温度范围	-55℃—125℃
Temperature Range	
温度系数	± 250ppm/℃
Temperature Coefficient	
温度变化	-55℃, 30min, +125℃
Temperature Variation	
碰撞	100m/s ² , 1000cycles, ΔR ≤ 2%R
Collision	
70℃耐久性	0.5W@70℃, 1000h
Electrical Endurance at 70℃	
	ΔR ≤ 10%R, CRV ≤ 3% or 5Ω
机械寿命	200周(200cycles)
Rotational Life	
	ΔR ≤ 10%R, CRV ≤ 3% or 5Ω


物理特性 Physical Characteristics

起动力矩	≤ 35mN · m
Starting Torque	
标志	阻值允许偏差 (± 10%不标注)
Marking	
	阻值代码、产品型号 Resistance Tolerance
	(When no identification, it is of ± 10%)
	Resistance Code、Model
标准包装	50只/管 (50pcs, per tube)
Standard Packaging	


共有尺寸 Common Dimensions

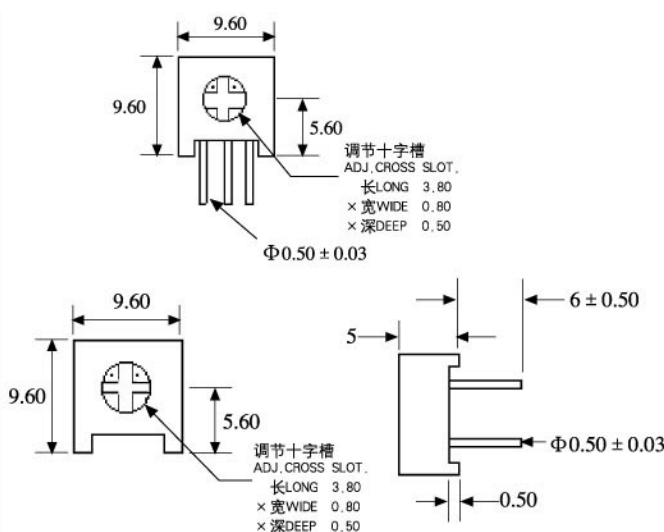


3386C

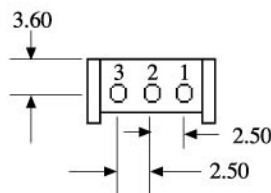


3386P




3386H




3386F




3386Y




3386W




3386T



3386U



选择方法 How To Order

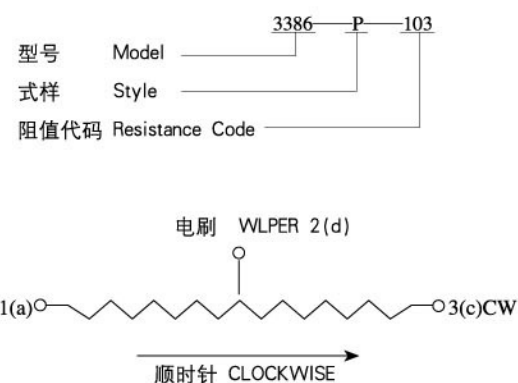

图中公差: 除注明外均为 ± 0.25
Tolerance is ± 0.25 If no identification.

阻值代码表
Standard Resistance Table

Resistance(Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

可按用户要求提供特殊规格
Special resistances available.