

ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Features:

- > High brightness surface mount LED.
- > 120° viewing angle.
- > Small package outline (LxWxH) of 3.2 x 2.8 x 1.8mm.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.




ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Package Outline Dimensions

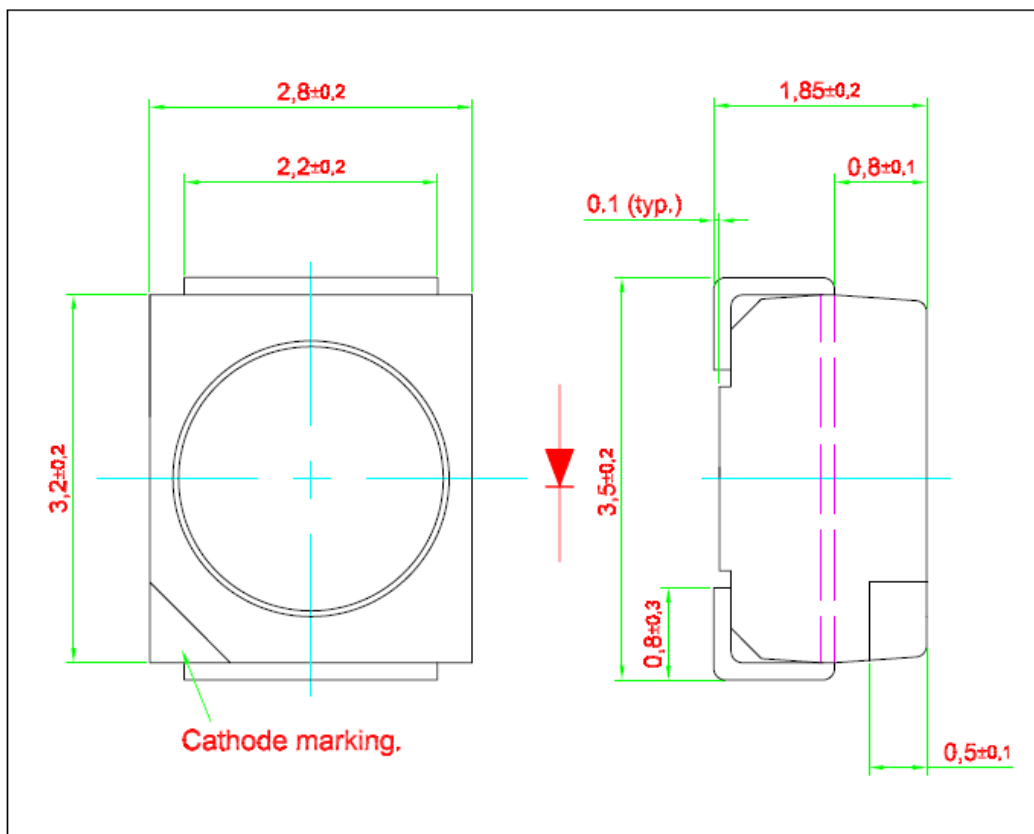

Material

	Material
Lead-frame	Cu Alloy With Ag Plating.
Package	High Temperature Resistant Plastic, PPA.
Encapsulant	Silicone Resin
Soldering Leads	Ag-Sn Plating

ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Optical Characteristics at Tj=25°C

Part Number	Color	Luminous Intensity @ 20mA IV (mcd)			Viewing Angle
		Min	Typ.	Max	
EF3528D-0201-X5X7-0546	Warm White	2200.0	2500.0	2800.0	120°

1. Luminous flux is measured with an accuracy of $\pm 11\%$.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.
3. Color binning is carrier for all units as per the color binning table. Only one color group is allowed for each reel.
4. High color rendering Index (CRI). Minimum CRI of 70.

Electrical Characteristics at Tj=25°C

Part Number	Vf @ If=20mA		
	Min. (V)	Typ. (V)	Max. (V)
EF3528D-0201-X5X7-0546	2.9	3.2	3.5

Forward voltage, Vf is measured with a current pulse of 1 ms and an accuracy of ± 0.1 V.

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current.	30	mA
Peak pulse current	100	mA
Reverse voltage.	5	V
LED junction temperature.	125	°C
Operating temperature.	-40 ... +100	°C
Storage temperature.	-40 ... +100	°C
ESD Threshold (HBM)	500	V
Power dissipation (at room temperature)	80	mW

ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Luminous Intensity Group at Tj=25°C.

Bin	Luminous Intensity @ 20mA IV (mcd)	
	Min	Max
X5	2200.0	2400.0
X6	2400.0	2600.0
X7	2600.0	2800.0

Vf Bining

Vf Bin	Forward Voltage (V)
V1	2.90...3.00
V2	3.00...3.10
V3	3.10...3.20
V4	3.20...3.30
V5	3.30...3.40
V6	3.40...3.50


Forward voltage, Vf is measured with an accuracy of ± 0.1 V.

ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Color bin structure

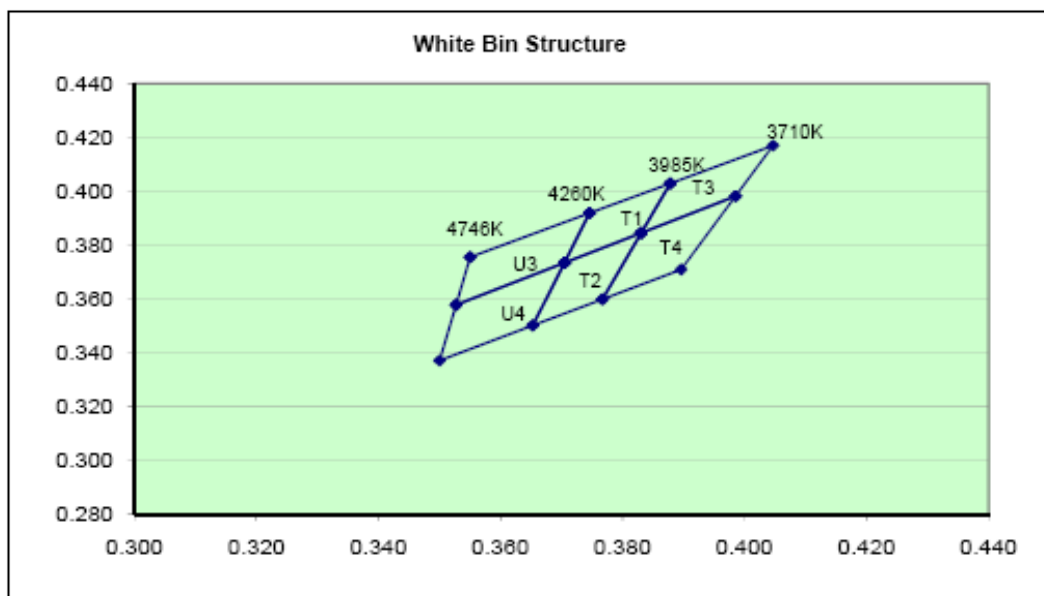

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .


Bin		1	2	3	4
T1	Cx	0.3746	0.3705	0.3831	0.3878
	Cy	0.3918	0.3734	0.3845	0.4028
T2	Cx	0.3705	0.3653	0.3767	0.3831
	Cy	0.3734	0.3501	0.3599	0.3845
T3	Cx	0.3878	0.3831	0.3985	0.4047
	Cy	0.4028	0.3845	0.3981	0.4169
T4	Cx	0.3831	0.3767	0.3896	0.3985
	Cy	0.3845	0.3599	0.3709	0.3981
U3	Cx	0.3550	0.3527	0.3705	0.3746
	Cy	0.3755	0.3577	0.3734	0.3918
U4	Cx	0.3527	0.3500	0.3653	0.3705
	Cy	0.3577	0.3370	0.3501	0.3734

ENEMAX


Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546


Relative Intensity Vs Forward Current

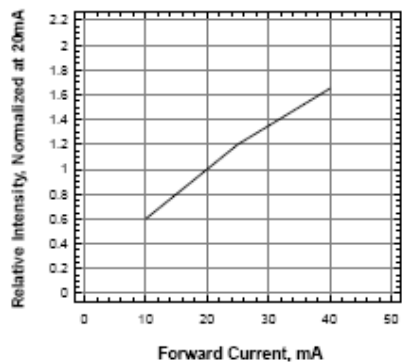


Forward Current Vs Forward Voltage

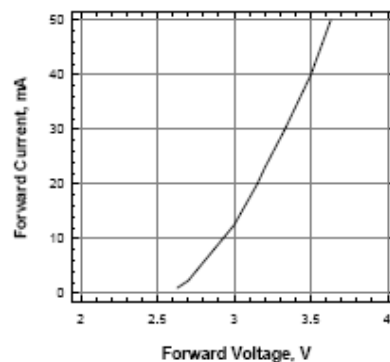


Maximum Forward Current Vs Ambient Temperature

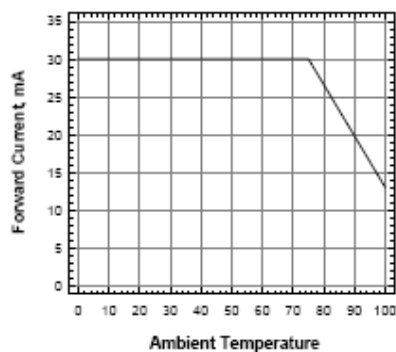

Relative Intensity Vs Wavelength

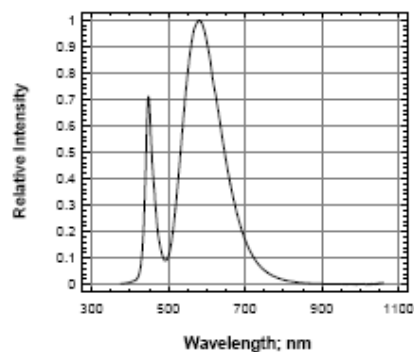

Radiation Pattern

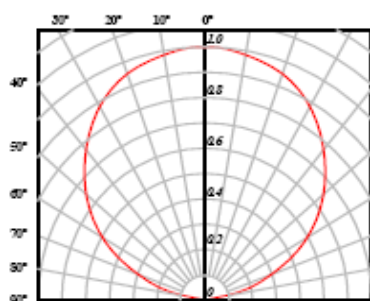


ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Recommended Solder Pad

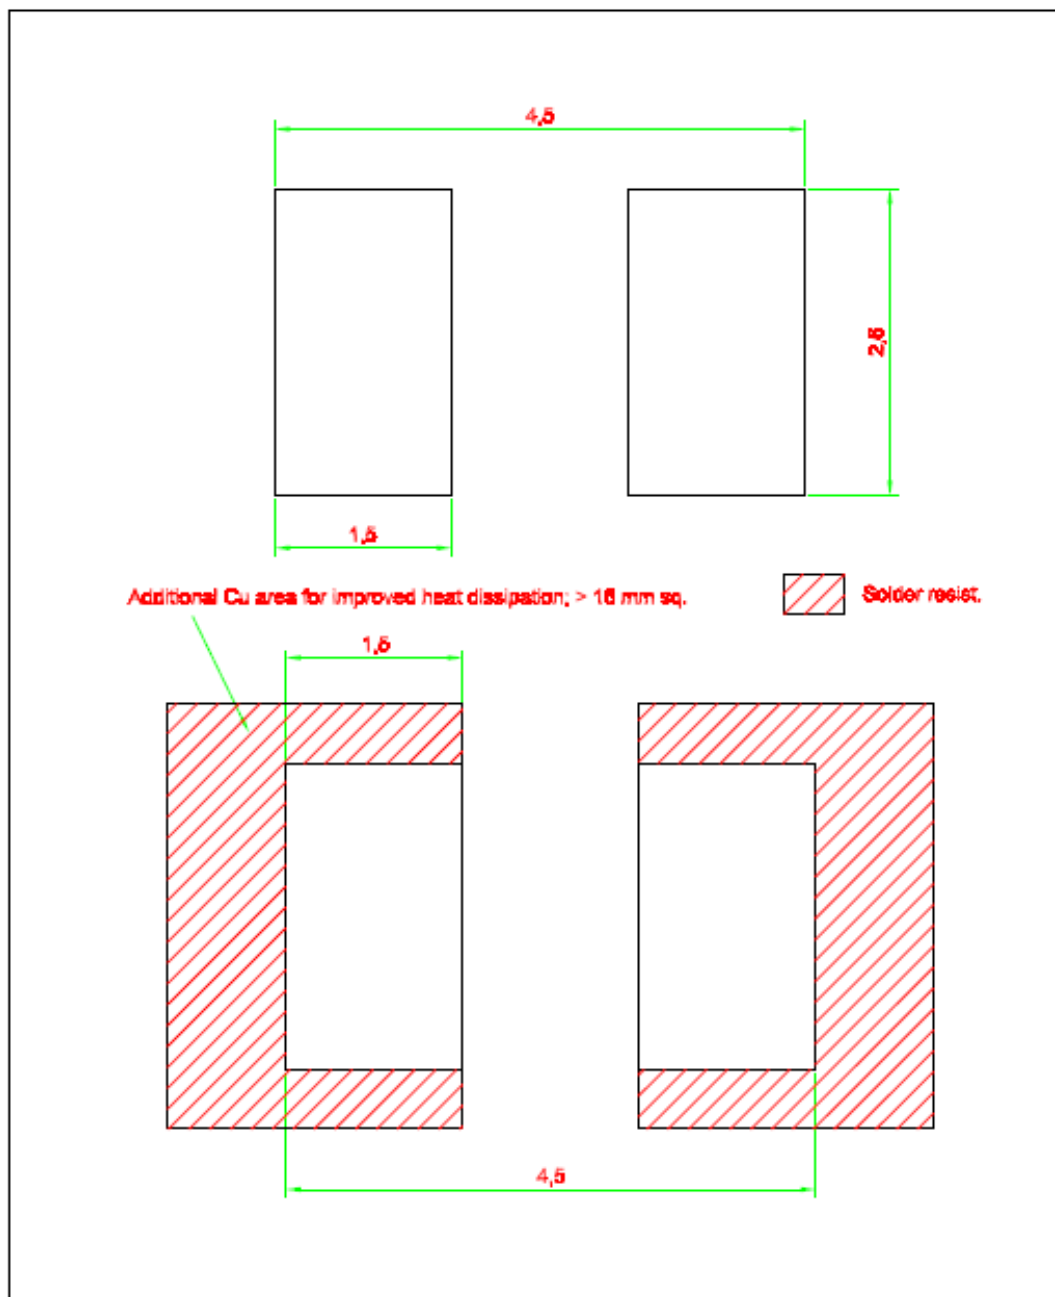

ENEMAX


Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Taping And Orientation

Reels come in quantity of 2000 units.

Reel diameters are 180 mm.

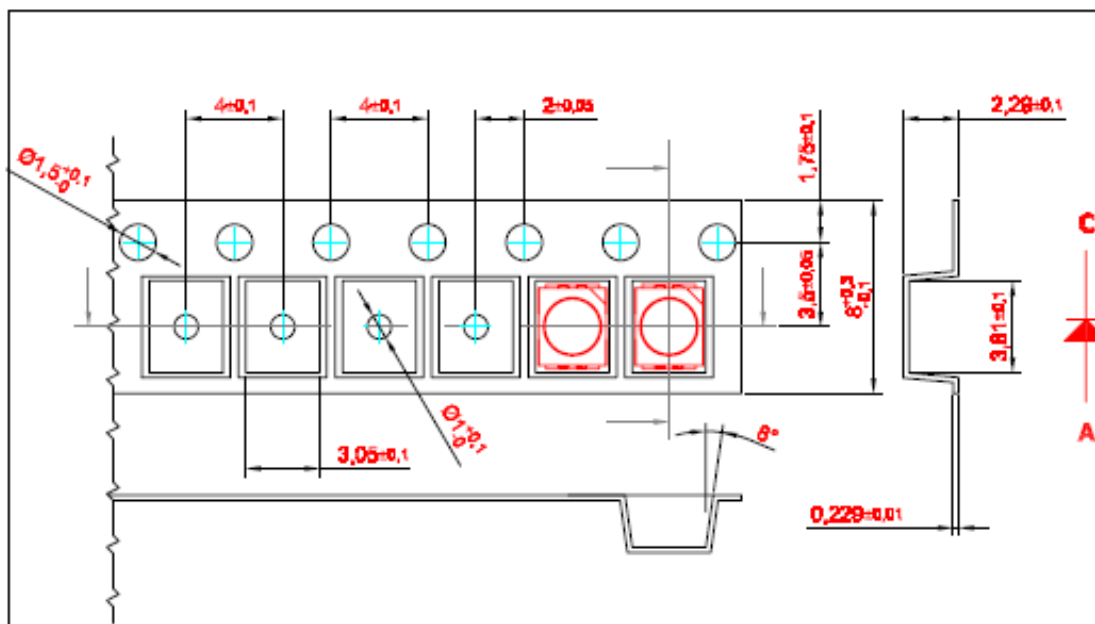


ENEMAX

Data Sheet

20mA InGaN Warm White-EF3528D- 0201-0546

Recommended Sn-Pb IR-Reflow Soldering Profile

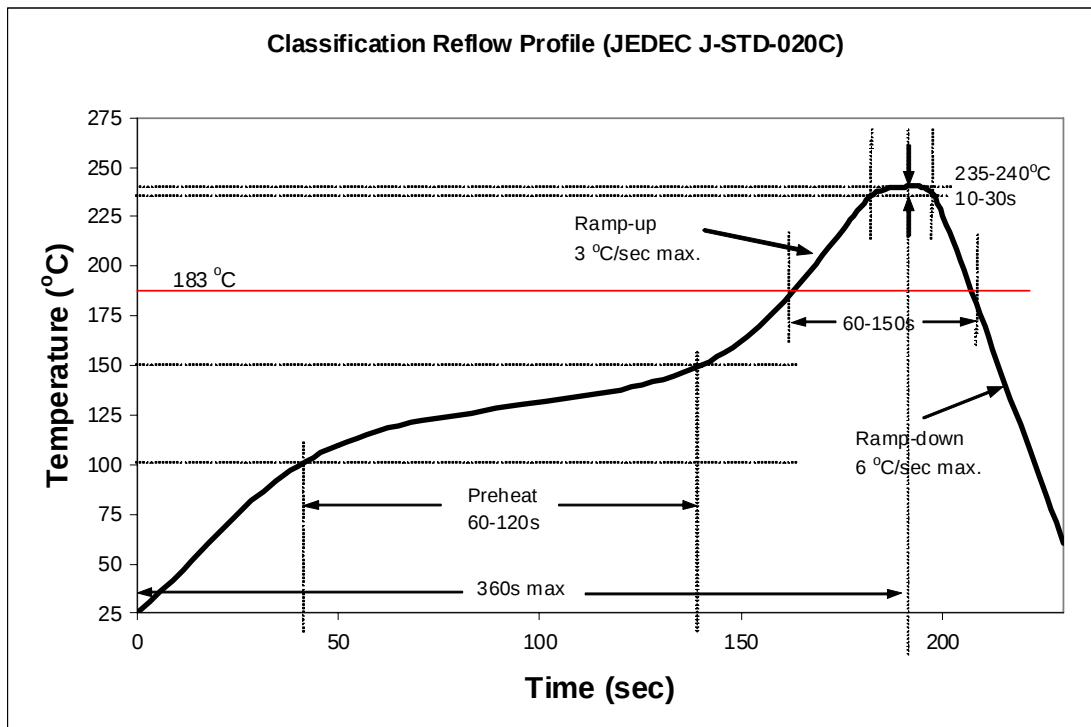

Recommended Pb Free IR-Reflow Soldering Profile.

