



FAST RECOVER RECTIFIER

BY396 THRU BY399

VOLTAGE RANGE
CURRENT


100 to 800 Volts
3.0Ampere

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042ounce, 1.19 grams

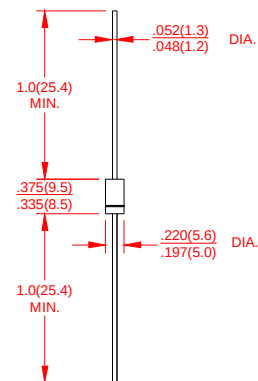

DO-27

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	BY396	BY397	BY398	BY399	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	100	200	400	800	Volts
Maximum RMS Voltage	V _{RMS}	70	140	280	560	Volts
Maximum DC Blocking Voltage	V _{DC}	100	200	400	800	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 75℃	I _(AV)	3.0				Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	100				Amps
Maximum Instantaneous Forward Voltage @ 3.0A	V _F	1.3				Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25℃	I _R	10			μA
	T _A = 100℃		500			
Maximum Reverse Recovery Time (Note 3) T _J =25℃	trr	500				ns
Typical Junction Capacitance (Note 1)	C _J	28				pF
Typical Thermal Resistance (Note 2)	R _{θJA}	22				℃/W
Operating Junction Temperature Range	T _J	(-55 to +150)				℃
Storage Temperature Range	T _{STG}	(-55 to +150)				℃

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
2. Thermal Resistance from junction to Ambient at .375"(9.5mm)lead length, P.C.board mounted.
3. Reverse Recovery Test Conditions: $I_f = 10\text{mA}$, $I_r = 10\text{mA}$, $I_{rr} = 1\text{A}$



FAST RECOVER RECTIFIER

BY396 THRU BY399

VOLTAGE RANGE
CURRENT

100 to 800 Volts
3.0Ampere

RATING AND CHARACTERISTIC CURVES BY396 THRU BY399

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

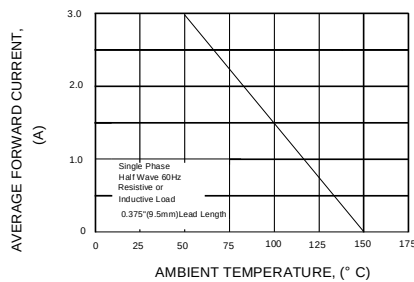


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

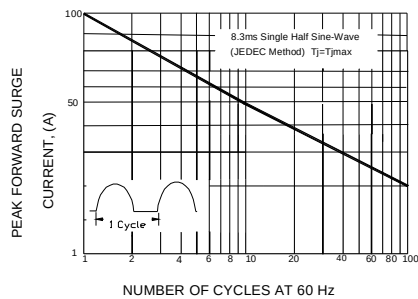


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

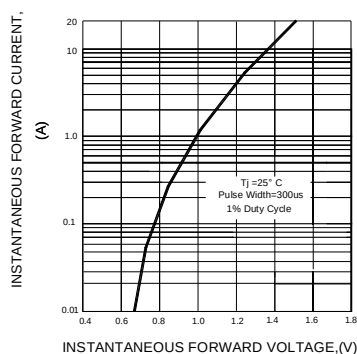


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

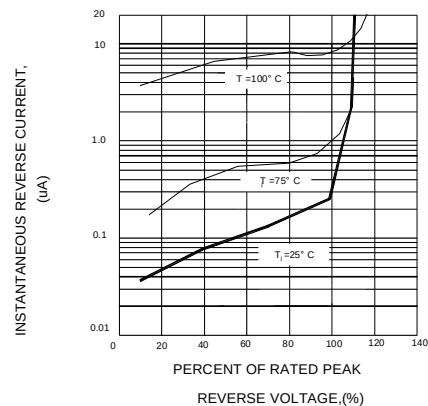


FIG.5-TYPICAL JUNCTION CAPACITANCE

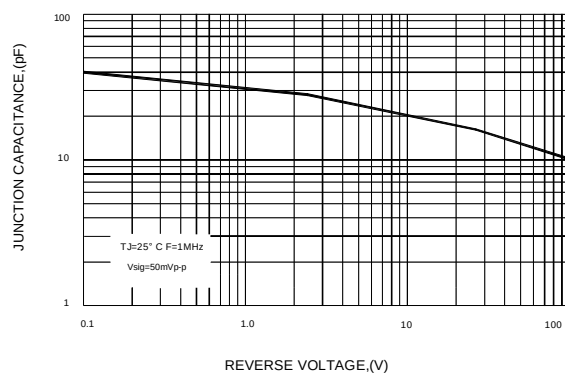


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

