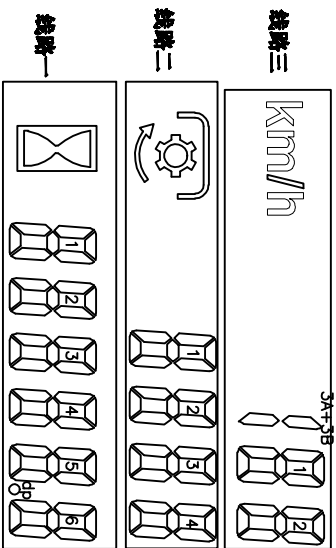
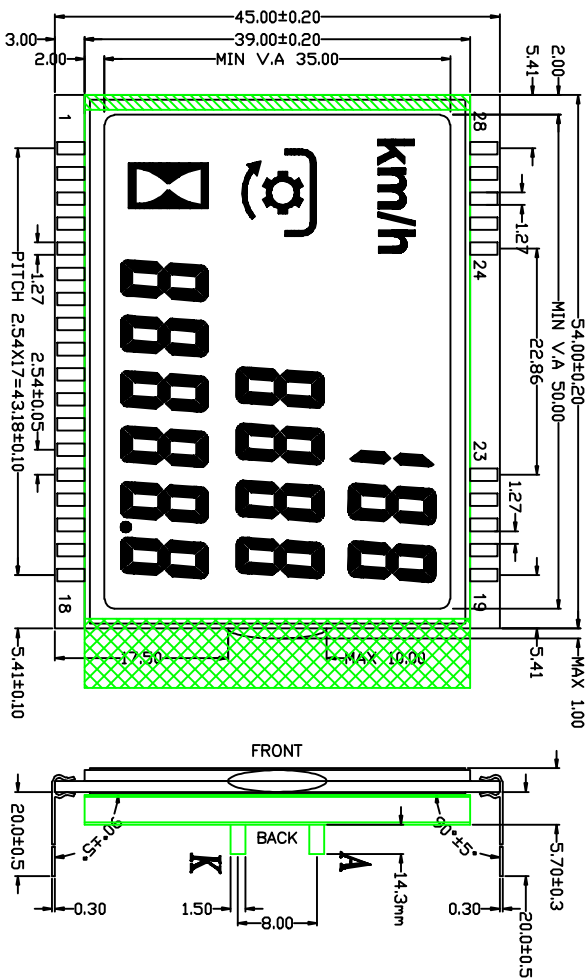


线路一																
PM	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CON				OM4	15	16	25	26	35	36	45	46	55	56	65	66
OM2			OM3		16	1C	2C	2C	3C	3C	4C	4C	5C	5C	6C	6C
OM3		OM2			1F	1B	2F	2F	3F	3F	4F	4F	5F	5F	6F	6F
OM4	CON				1A			2A		3A		4A				6A

线路二																
PM	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CON				OM4	15	16	25	26	35	36	45	46	55	56	65	66
OM2			OM3		16	1C	2C	2C	3C	3C	4C	4C	5C	5C	6C	6C
OM3		OM2			1F	1B	2F	2F	3F	3F	4F	4F	5F	5F	6F	6F
OM4	CON				⑤ 1A			2A		3A		4A				6A

线路三																
PM	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CON				OM4	15	16	25	26	35	36	45	46	55	56	65	66
OM2			OM3		16	1C	2C	2C	3C	3C	4C	4C	5C	5C	6C	6C
OM3		OM2			1F	1B	2F	2F	3F	3F	4F	4F	5F	5F	6F	6F
OM4	CON				1A			2A		3A		4A				6A

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20
TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 12-00 O'CLOCK.
3. VIEWING MODE: POSITIVE, TRANSMISSIVE
4. DISPLAY TYPE : TN ~~STN~~
5. CONNECTION: PIN
6. BACKLIGHT TYPE: EDGE / WHITE / V3.0V / 30mA
7. FLUID SPECIFICATION:
 DRIVING VOLTAGE: VOP 5.0V
 MULTI-PLEX LEVEL: 1/4DUTY / 1/3B3AS
 OPERATING TEMP. : -20°C --- +65°C
 STORAGE TEMP. : -30°C --- +90°C
8. ROHS CERTIFICATION

 厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.		
7777	绘图: Cheng 审核: Zhao 批准:	绘图编号: PDK109-01 客户编号: 图纸张数: V1.1 日期: 2017.12.19 页数: 1/1