


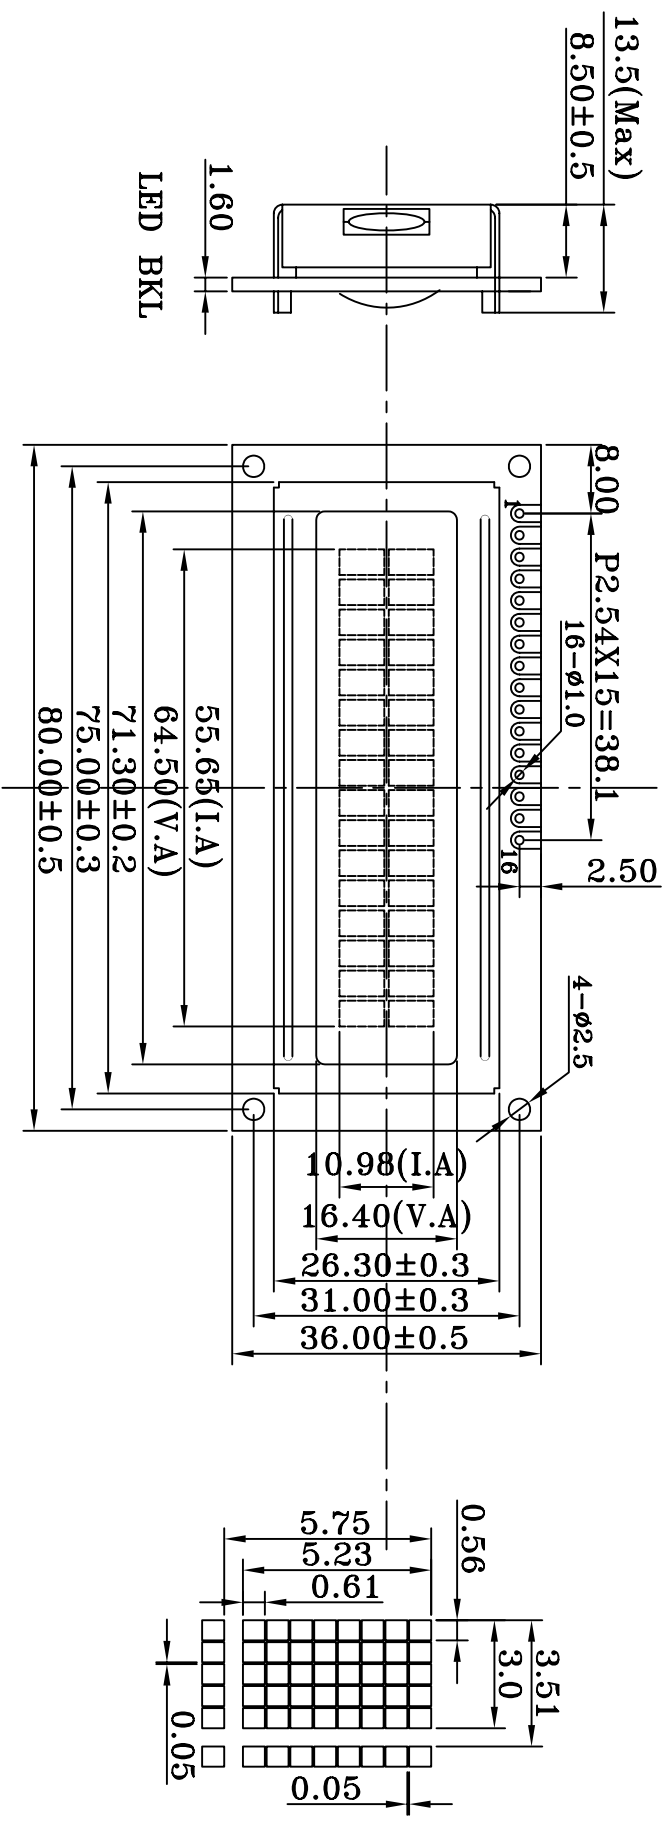

FEATURES:

1. DISPLAY MODE: STN BLUE, TRANSMISSIVE, NEGATIVE
2. VIEW ANGLE: 6:00
3. OPERATING VOLTAGE: 5.0V
4. OPERATING TEMP: -20°C ~ 70°C
5. STORAGE TEMP: -30°C ~ 80°C
6. BACKLIGHT: LED (WHITE), Vbkl=5.0V
7. DRIVER: ST7066U or EQUIVALENT

|        |     |     |     |     |     |     |     |     |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|
| PIN    | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| SIGNAL | VSS | VDD | V0  | RS  | R/W | E   | DB0 | DB1 |
| PIN    | 9   | 10  | 11  | 12  | 13  | 14  | 15  | 16  |
| SIGNAL | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | A   | K   |

CENTER OF PCB  
TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2

|                                  |         |                           |                |
|----------------------------------|---------|---------------------------|----------------|
|                                  |         |                           |                |
| XIAMEN PRECISE DISPLAY CO., LTD. |         | 单位:mm                     |                |
| 确认:                              | 绘图: 刘永全 | 绘图编号: LCM1602K-NSW-BBW-01 | 日期: 2010.04.08 |
|                                  | 审核:     | 客户编号: PCM1602K-NSW-BBW-01 | 页数: 1/1        |
|                                  | 批准:     | 图纸版本号: V1.0               |                |