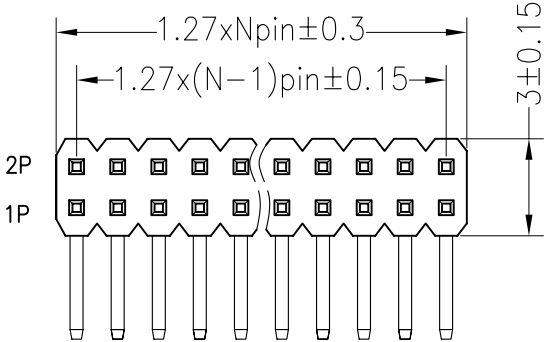
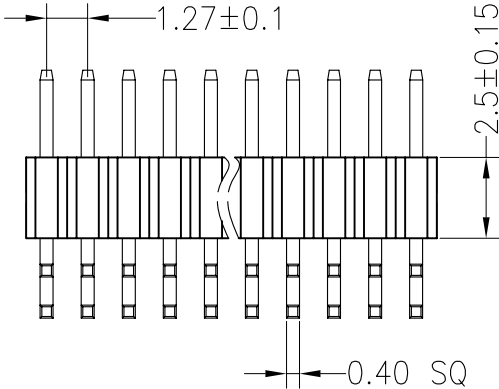
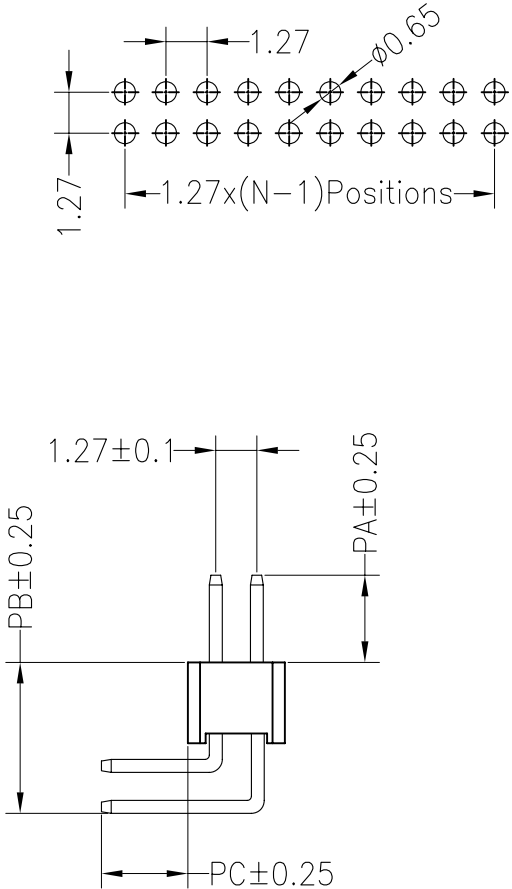


	1	2	3	4	5	6	7	8	9																								
G									G																								
F	SPECIFICATIONS Rated Current:1.0AMP Contact Resistance:20mΩ Max Withstand Voltage:500V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40℃ to +105℃								F																								
E	Contact Material:Brass Contact Plating:Au or Sn Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230℃ for 30-60 seconds (260℃ for 10 seconds)								E																								
D									D																								
C									C																								
B					<table><tr><th colspan="6">Dimension antitheses list</th></tr><tr><th>ITEM</th><th>PA</th><th>PB</th><th>PC</th><th>L短</th><th>L长</th></tr><tr><td>Alternate</td><td>3.10</td><td>5.20</td><td>2.70</td><td>10.2</td><td>12.7</td></tr><tr><td>Standard</td><td></td><td></td><td></td><td></td><td></td></tr></table>				Dimension antitheses list						ITEM	PA	PB	PC	L短	L长	Alternate	3.10	5.20	2.70	10.2	12.7	Standard						B
Dimension antitheses list																																	
ITEM	PA	PB	PC	L短	L长																												
Alternate	3.10	5.20	2.70	10.2	12.7																												
Standard																																	
A					OPERATION	DRAW	YiYuSheng	12.03.28	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD																						
					X.X	±0.30			UNIT	mm																							
					X.XX	±0.20	CHECK		SIZE	A4																							
					X.XXX	±0.10			SHEET	1/1																							
	A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE				PART NO.	L-KLS1-207C-2.5-2-XX-R1-2.7*3.1*1.2																					
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.		TITLE:	1.27PH H2.5mm 2xNpin 90°																					
	1	2	3	4	5	6	7	8	9																								