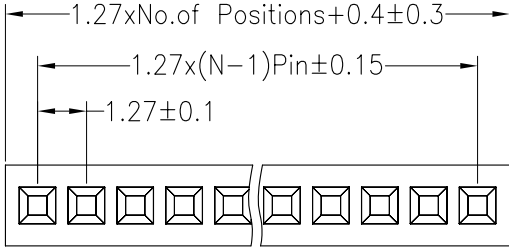
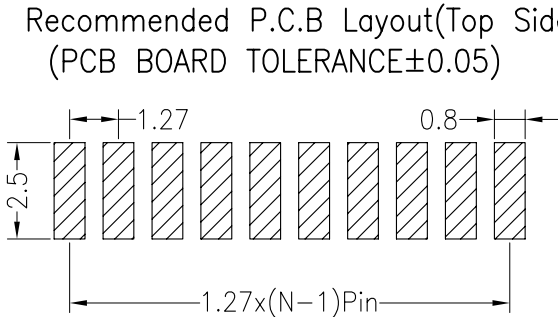
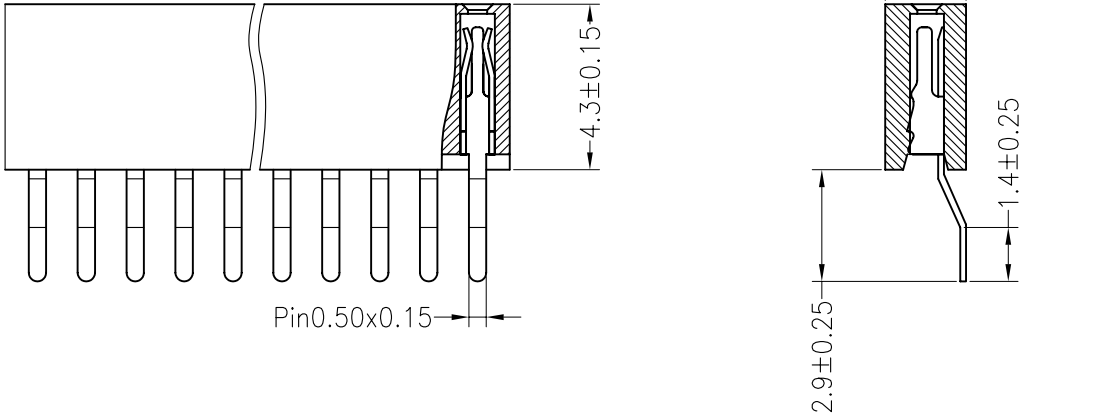


	1	2	3	4	5	6	7	8	9				
G	SPECIFICATIONS Rated Current:1.0AMP Contact Resistance:20mΩ Max Withstand Voltage:500V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:−40°c to +105°c Contact Material:Phosphor Bronze Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V−0) Standard:PA6T Max.Processing Temp: 230°C for 30−60 seconds (260°C for 10 seconds)   <td>G</td>									G			
F										F			
E										E			
D	 Pin0.50x0.15									D			
C										C			
B										B			
A					OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	KLS ELECTRONIC CO., LTD	
					X.X	±0.30				UNIT	mm		
					X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-208CA-4.3-1-08-RT
	A0	2012.04.18	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
	REV	DATE	MODIFICATION DESCRIPTION		CHANGE		APPROVE			PROJ.	◆	TITLE:	1.27PF 1xNPin H4.3 90° SMT
	1	2	3	4	5	6	7	8	9				