



N:NUMBER OF CONCATS

$N \times 9.50 + 2.00 \pm 0.5$

$(N-1) \times 9.50 \pm 0.2$

9.50 ± 0.1

1.55 ± 0.1

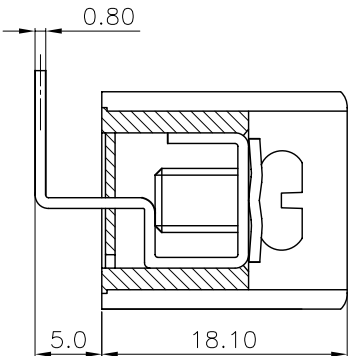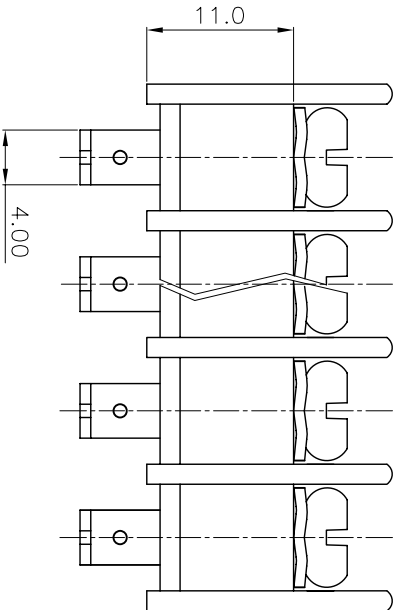

Materials

Housing:PA66,UL94V-0

Terminal:;0.8t,Tin-Plated

Screw: Steel,M4 Ni-Plated

Capability

Rated: 300V/25A

Temp.Range: -40℃~+105℃

Wutgstabd Voltage: AC2000V/Min

Insulation Resistance: 500MΩ/DC500V

Wire Range: 22~12AWG

Max.Torque Value: 1.2N.m 10.6Lb.in

PRODUCT NUMBER CODE:

KF45R - X X X X X

CONTACTS TYPE

R:RIGHT ANGLE TYPE

HOUSING COLOR

L:BLUE G:GREEN E:Orange

B:BLACK A:GRAY W:WHITE

CONTACT PLATING

0:GOLD FLASH 6:TIN

3:30u" Z:ZINC

CONNECTOR TYPE

P:PLUG S:SOCKET

No.OF CONTACTS

02-15

SERIES No.

KF45R

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	KF45R-XXXXX		
PROJECTION		TITLE	
UNITS	mm	TERMINAL BLOCKS PITCH9.50MM	
SHEET SIZE	A4	SERIES	KF45R SERIES

KF 慈溪市凯峰电子有限公司

KAIFENG ELECTRONIC

KAIFENG ELECTRONIC CO.,LTD