

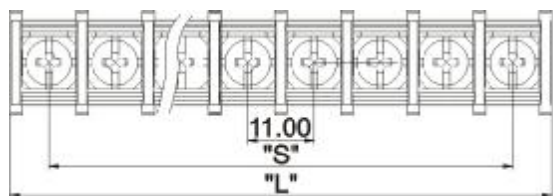


DG65C-B



$$\begin{aligned} "S" &= 11.0 \times (P-1) \\ "L" &= 11.0 \times (P-1) + 13.0 \end{aligned}$$

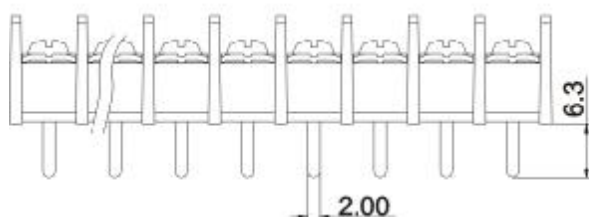

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	24.00	35.00	46.00	57.00	68.00	79.00	90.00	101.00	112.00	123.00	134.00	145.00	156.00	167.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	178.00	189.00	200.00	211.00	222.00	233.00	244.00	255.00	266.00	277.00	288.00			
S(mm)	165.00	176.00	187.00	198.00	209.00	220.00	231.00	242.00	253.00	264.00	275.00			

Approval



Electrical

Standard

Rated voltage

300V

450V

Rated current

20A

32A

Wire range

22-12AWG

4.0mm²

With standing voltage

AC2000V/1Min

Insulation Resistance

500M Ω /DC500V

Mechanical

Max. Torque Value

1.2N.m 10.6Lb.in

Ambient temperature

-40 $^{\circ}$ C~+105 $^{\circ}$ C

Dimensions

Pitch

11.0mm(.433")

Poles

2P-22P

Material

Housing

PA66,UL94V-0

Terminal

Brass,1.0t,Tin Plated

Screws

Steel,M4 Ni Plated


HOW TO ORDER :

DG65 — — P — 1 — X X X
 Customer Request

C:  S:  A Mount Ends
 H:  R:  B Barrier Ends

NO. of Pole

Color 1 Grey 4 Green
3 Black



DEGSON ELECTRONICS CO., LTD.

NAME

DG65C-B