





Dimensions

Poles:	2P-24P
Pitch:	7.5mm(.295")

Electrical

Standard:	UL	IEC
Voltage Rating:	300V	250V
Current Rating:	10A	17.5A
Wire range:	22-14AWG	1.5mm ²
Withstanding voltage	AC2000V/Min	
Insulation Resistance	500MΩ/DC500V	

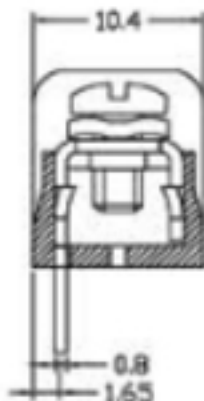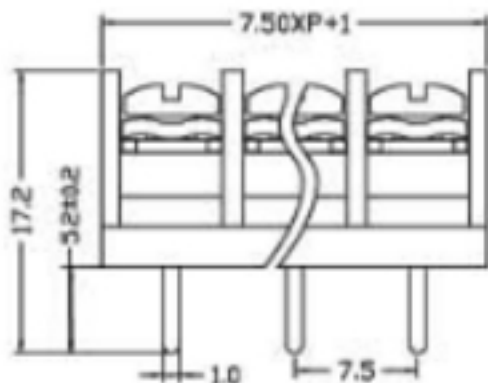

Mechanical

Torque:	0.5N.m (4.4Lb.in)
Ambient temperature	-40°C~+105°C

Material

Housing:	PA66(UL 94V-0)
Terminal	Brass,Tin Plated
Screw:	Steel,M3 Ni-Plated