

PLUGGABLE TERMINAL BLOCKS


XY2500F-J

Poles: Any poles (2-16P)
Pitch: 3.81mm



Voltage Rating: 125V
Current Rating: 8A
Wire range: 22-16AWG 1.5mm²
Housing: PA66 (UL 94V-0)
Wire Cage: Steel (Zinc Plated)
Clamp: Phosphor Bronze, Nickel Plated
Screw: M2.0, Steel (A3), Zinc Plated
Torque: 0.2N.m

额定电压: 125V
额定电流: 8A
使用线径: 22-16AWG 1.5mm²
零件: 尼龙66 (UL 94V-0)
接触保护材料: 铁, 镀锌
薄片 (触点) 材料: 磷青铜, 镀镍
螺栓材料: M2.0, A3钢, 镀锌
扭矩: 0.2N.m

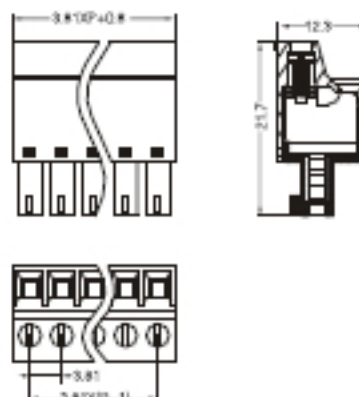


XY2500F-JS

Poles: Any poles (2-14P)
Pitch: 3.81mm




Voltage Rating: 125V
Current Rating: 8A
Wire range: 22-16AWG 1.5mm²
Housing: PA66 (UL 94V-0)
Wire Cage: Steel (Zinc Plated)
Clamp: Phosphor Bronze, Nickel Plated
Screw: M2.0, Steel (A3), Zinc Plated
Torque: 0.2N.m

额定电压: 125V
额定电流: 8A
使用线径: 22-16AWG 1.5mm²
零件: 尼龙66 (UL 94V-0)
接触保护材料: 铁, 镀锌
薄片 (触点) 材料: 磷青铜, 镀镍
螺栓材料: M2.0, A3钢, 镀锌
扭矩: 0.2N.m

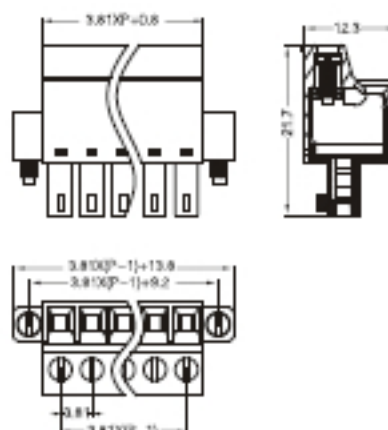


XY2500V-E(3.81) XY2500V-F(3.5)

Poles: Any poles (2-16P)
Pitch: 3.81mm 3.5mm

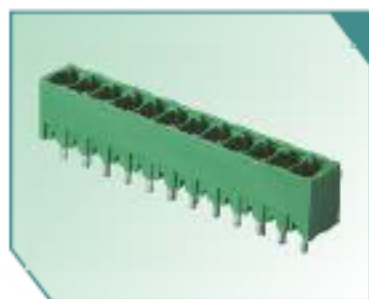

Voltage Rating: 125V
Current Rating: 8A
Housing: PA66 (UL 94V-0)
Solder Pin: Brass, Tin Plated

额定电压: 125V
额定电流: 8A
零件: 尼龙66 (UL 94V-0)
触点材料: 黄铜, 镀锡

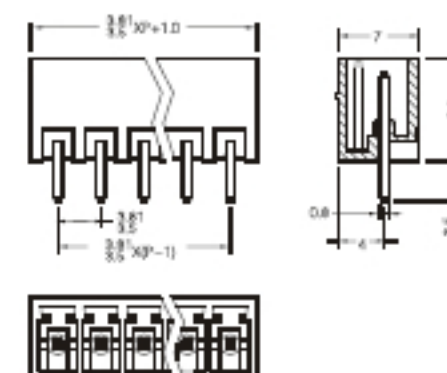

XY2500V-ES(3.81) XY2500V-FS(3.5)

Poles: Any poles (2-14P)
Pitch: 3.81mm 3.5mm



Voltage Rating: 125V
Current Rating: 8A
Housing: PA66 (UL 94V-0)
Solder Pin: Brass, Tin Plated

额定电压: 125V
额定电流: 8A
零件: 尼龙66 (UL 94V-0)
触点材料: 黄铜, 镀锡

