
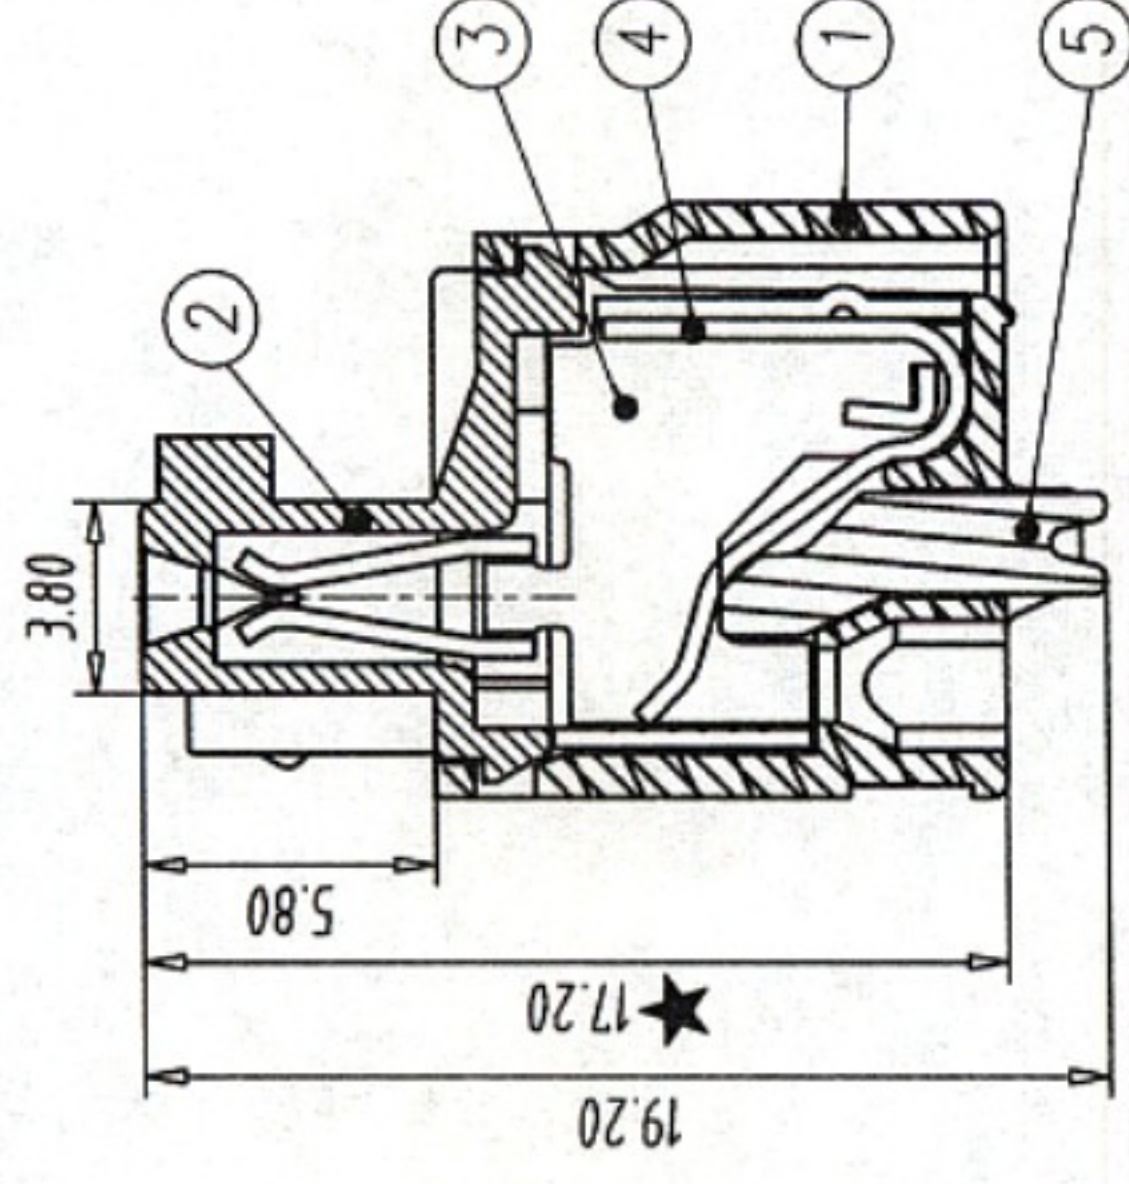
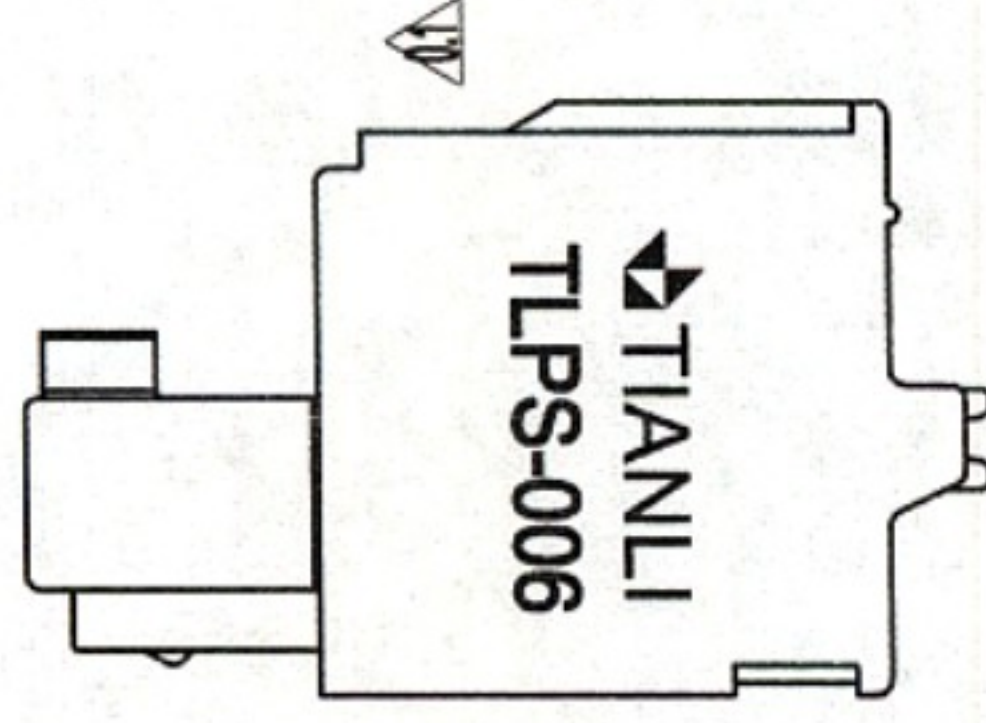
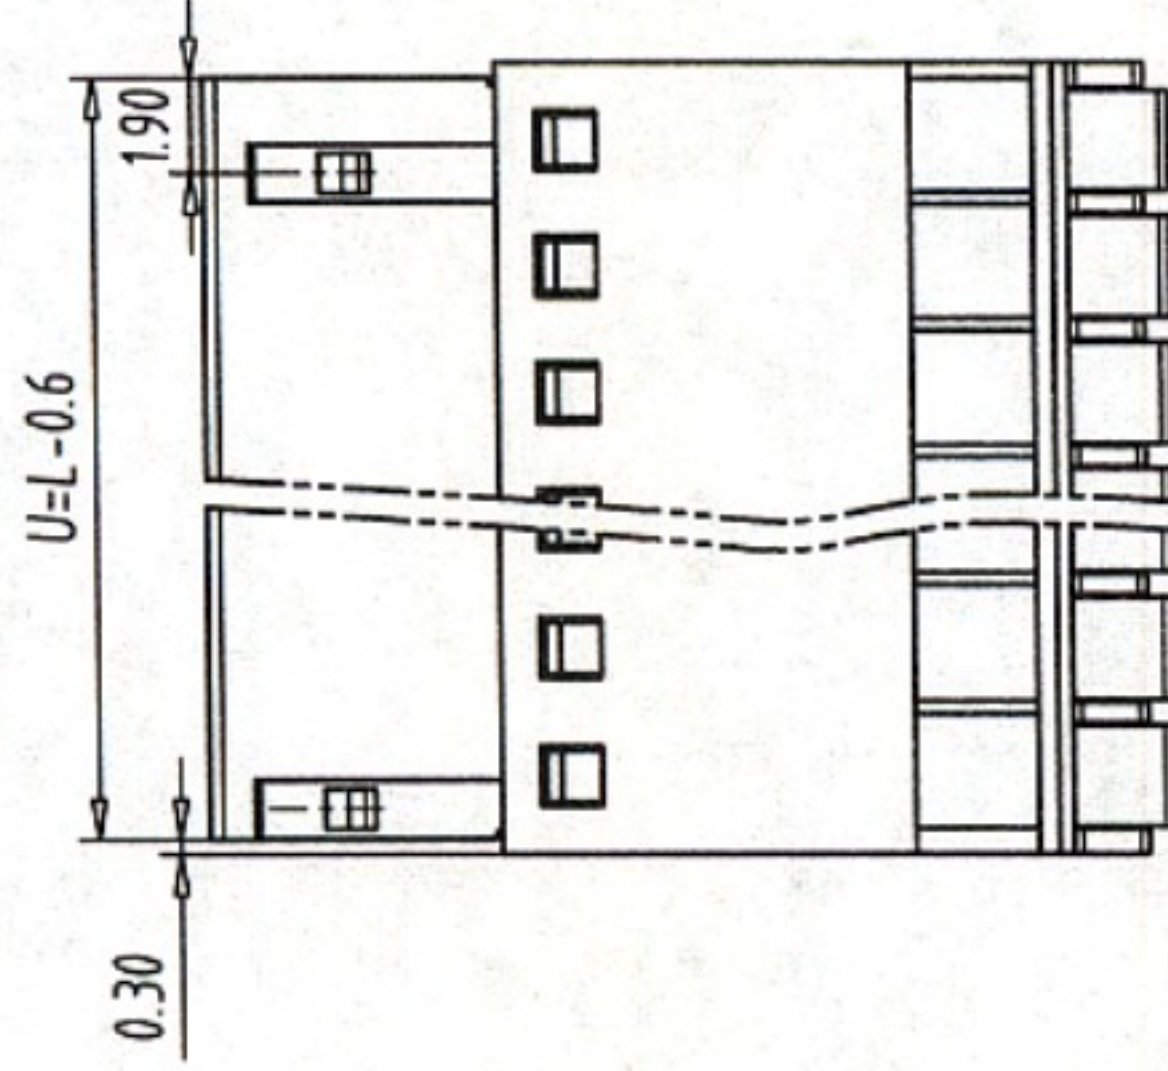


REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		ORIGINAL	lih w	14.09.03
V0.1		增加视图 	lih w	16.05.01

NOTES:

1. Rating: 150V 5A (UL); PITCH: 2.50mm
2. Insulation Withstands Voltage: AC1300V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. Suitable Wire Range: AWG 20~28(UL)
6. RoHS Compliance
7. ★ "the important dimension.
8. Wire strip length: 7-8mm

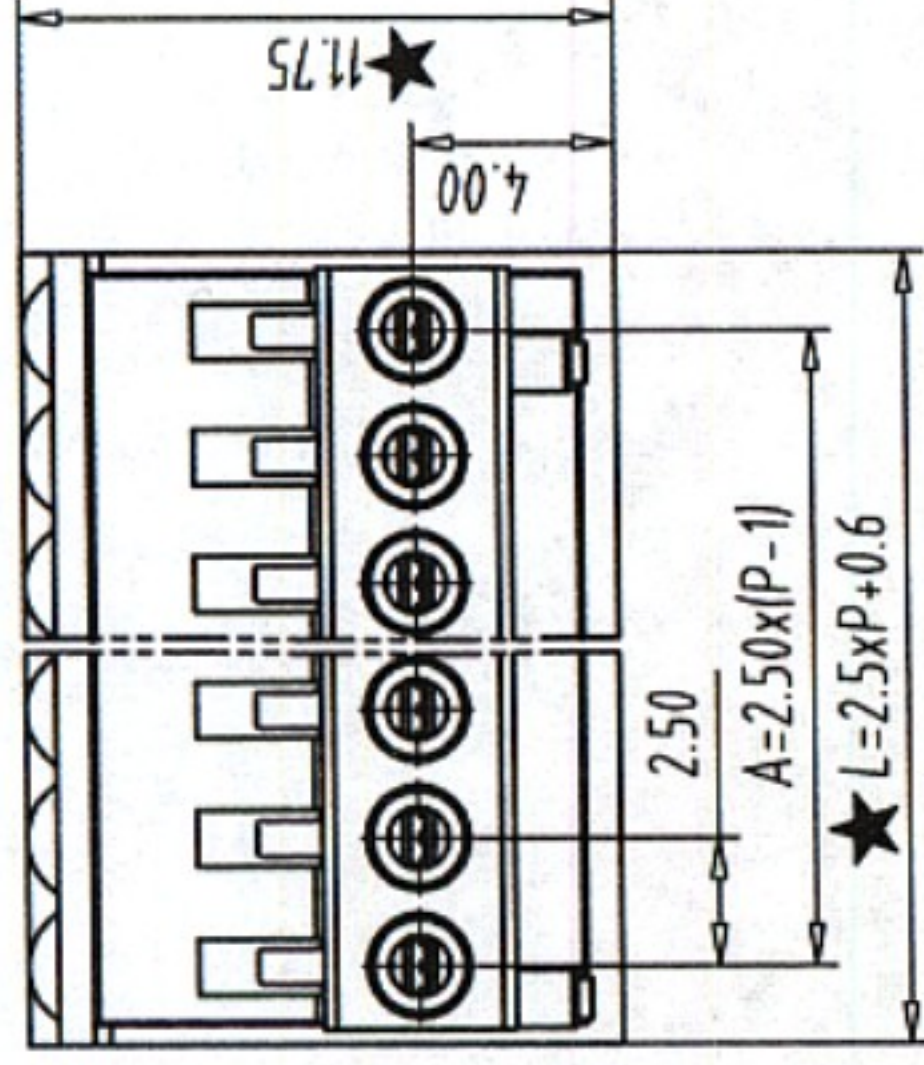

DIM \ P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Nominal dimension range in mm																						
L	5.6	8.1	10.6	13.1	15.6	18.1	20.6	23.1	25.6	28.1	30.6	33.1	35.6	38.1	40.6	43.1	45.6	48.1	50.6	53.1	55.6	58.1	60.6
	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0
A	2.5	5	7.5	10	12.5	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	57.5
Total Pitch Tolerances in mm																							
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	100	over	150	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	320	10	100	150	100	150	100	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.2	0.3	0.5

5	LEVER	TL015D7XXX	P	PA66(V0)	ORANGE
4	SPRING COIL	TL015B0016	P	STAINLESS STEEL	
3	CLAMP	TL015B0017	P	COPPER ALLOY	TIN PLATED
2	COVER	TL015D6XXX	1	PA66(V0)	
1	HOUSING	TL015D5XXX	1	PA66(V0)	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	Lihw	DATE	UNITS	mm	SHEET/OF
CHK.		DATE	SCALE	25:1	A4
APP.		DATE	NAME		
		12.01.24		TLPS-006V-XXP-X	
		TIANLI		TLPS006VXX	
		ELECTRICAL MACHINERY BOICO, LTD.		DWGNO	