
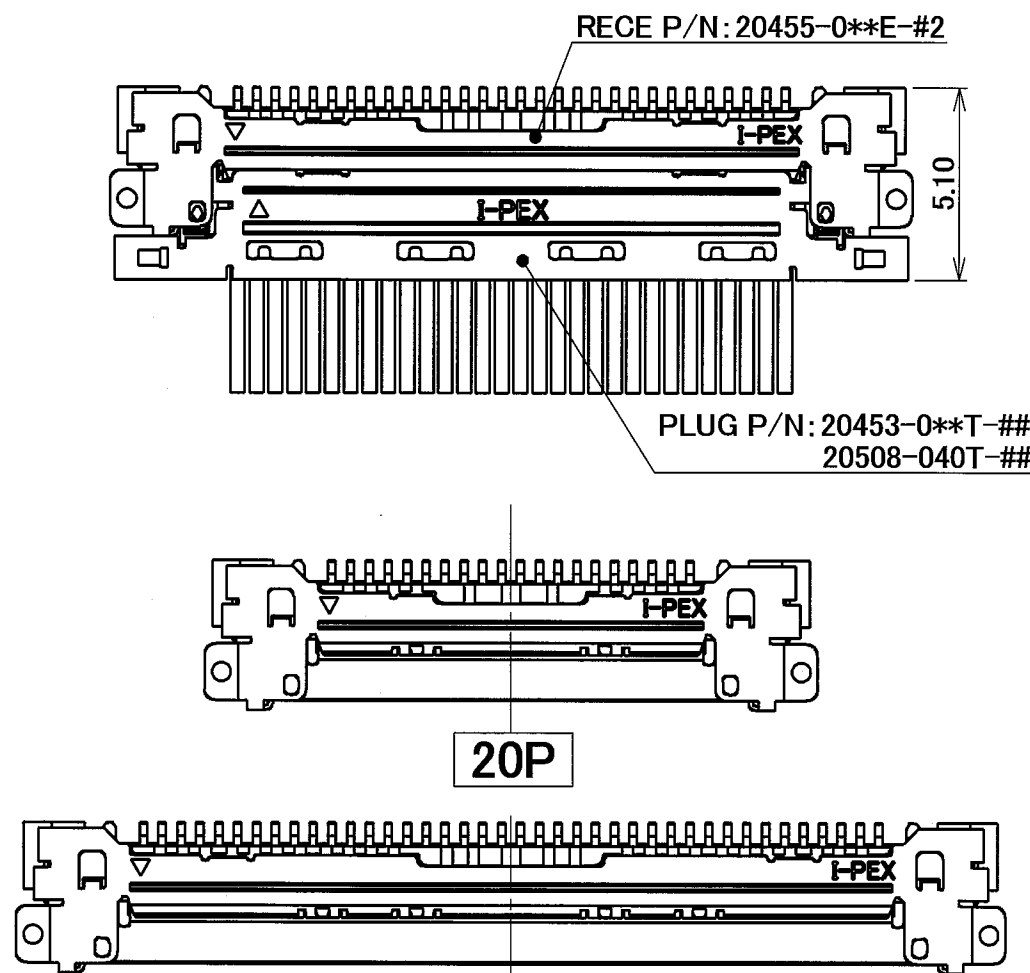
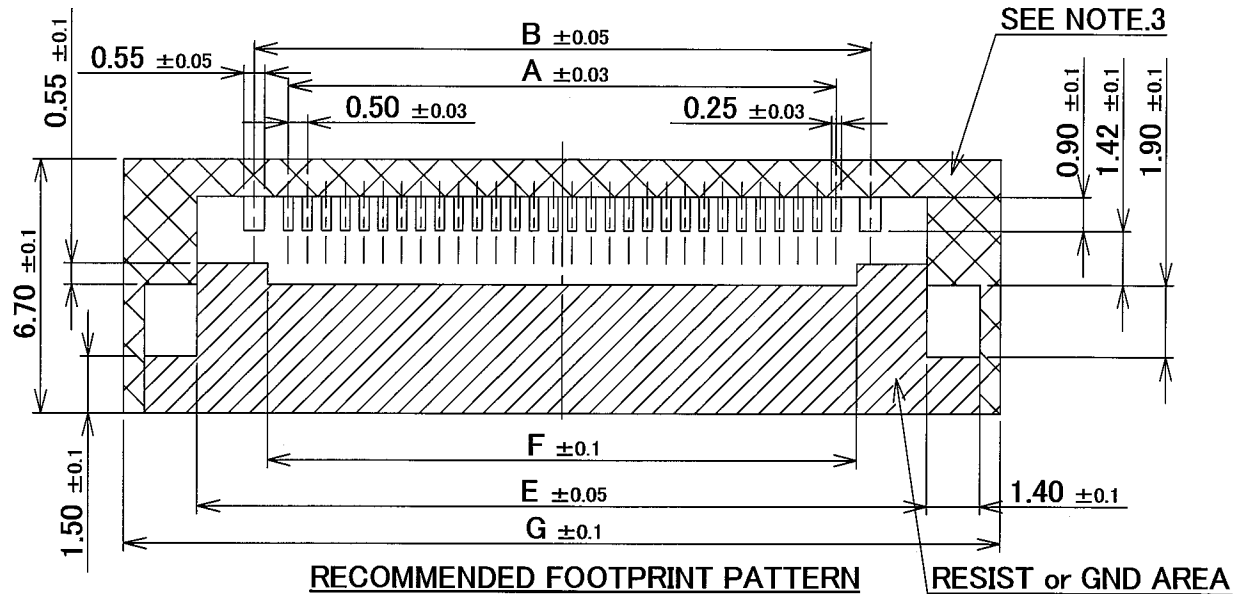
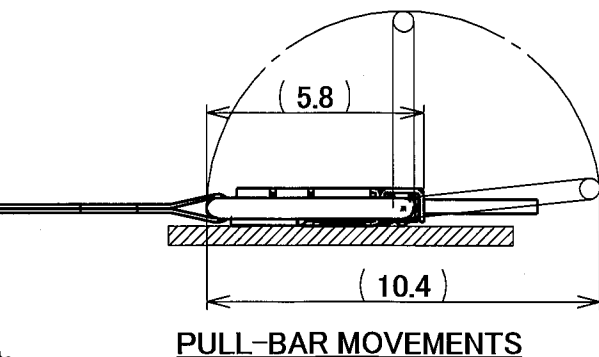
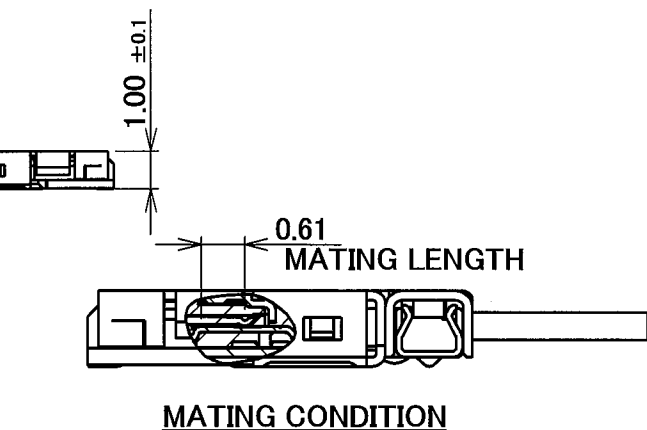
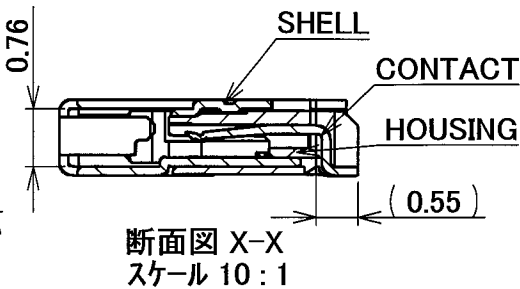


PART NO.	A	B	C	D	E	F	G
20455-020E-#2	9.50	11.30	16.25	14.47	14.30	10.60	18.20
20455-030E-#2	14.50	16.30	21.25	19.47	19.30	15.60	23.20
20455-040E-#2	19.50	21.30	26.25	24.47	24.30	20.60	28.20

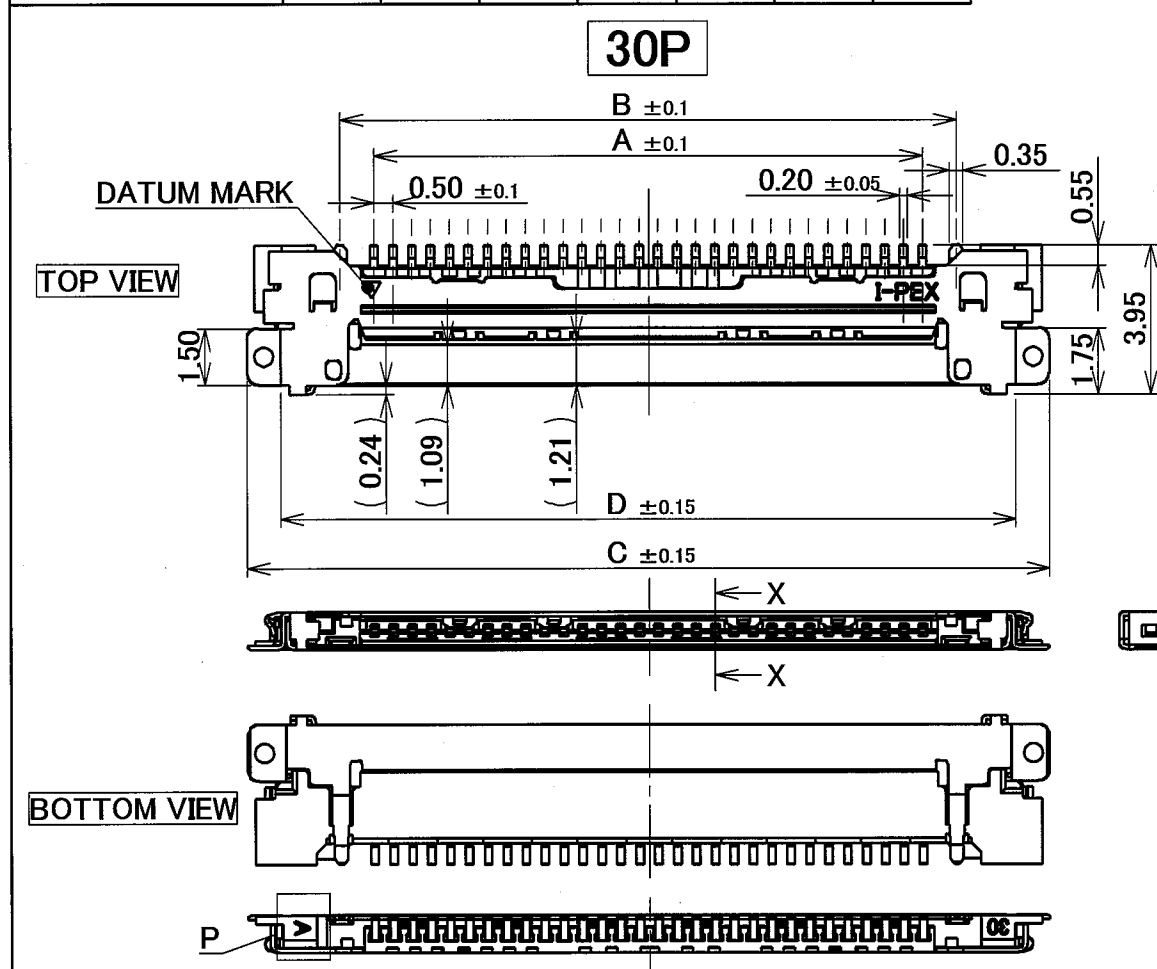

- NOTES.
- 1.MATERIAL & FINISH
HOUSING : LCP(RE D PHOSPHORUS FREE), UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE / Au OVER Ni
SHELL : PHOSPHOR BRONZE / Au OVER Ni
 - 2.COPLANARITY : 0.1MAX.
 - 3.IN CASE OF PLUG WITH PULL-BAR(P/N:20453-0**T-#1 or 20508-040T-#1), THIS AREA CANNOT MOUNT ANOTHER COMPONENTS.
 - 4.TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX TECHNICAL REPORT No. : IER-001-03230
 - 5.RoHS Compliant
 - 6.PRODUCT SPECIFICATION No. PRS-1427

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

P/N:20455-0**E-#2

0 : WITH DATUM MARK
1 : WITHOUT DATUM MARK

PATENT PENDING

13	Z09587	H.I	Nov/10/'09	J.H	DESIGN'D BY	DATE	I-PEX Interconnect and Packaging Electronics TOKYO, JAPAN			
12	Z09279	H.I	Jun/08/'09	T.H	H.Ikari	Sep/27/'07				
11	Z09239	H.I	May/11/'09	T.H	CHK'D BY	DATE	TITLE CABLINE-VS RECE ASS'Y			
10	Z09146	H.I	Mar/11/'09	E.K	APP'D BY	DATE				
9	Z09078	H.I	Feb/10/'09	E.K	E.Kawabe	Sep/27/'07	SCALE 5:1			
REV	ECN	BY	DATE	APP	CUSTOMER COPY		PROJECTION	UNIT	DWG. No.	SHEET
REV.RECORD								mm	20455	1/1
SERIES No.										REV.
										13