

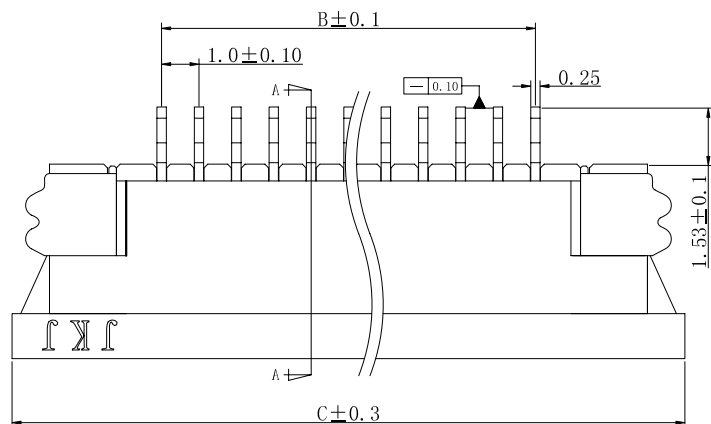


CUSTOMER

REV.
版本
X1
X2
BMODIFICATION.
变更内容
初版发行
增强锁扣强度。
图面整理DRAWN/DATE
设计/日期
Frank 2015.05.19

SECTION A-A

新料号

1023A0-***-***

PIN数

1: LCP 2: PA9T



D: 袋装 G: 管装 P: 盘装

1: 雾锡 2: 亮锡 3: 镀金




Electrical

Voltage: 50 V AC(rms)/DC
Current: 1 A AC(rms)/DC
Contact Resistance: 40 mΩ max(initial)
Dielectric Withstanding Voltage: 200 V AC/rms
Insulation Resistance: 500 MΩ min
Operating Temp: -40° C ~ +85° C

No. of Contacts (n)	Dimensions		
	A	B	C
004	5.07	3.0	11.0
005	6.07	4.0	12.0
006	7.07	5.0	13.0
007	8.07	6.0	14.0
008	9.07	7.0	15.0
009	10.07	8.0	16.0
010	11.07	9.0	17.0
011	12.07	10.0	18.0
012	13.07	11.0	19.0
013	14.07	12.0	20.0
014	15.07	13.0	21.0
015	16.07	14.0	22.0
016	17.07	15.0	23.0
017	18.07	16.0	24.0
018	19.07	17.0	25.0
019	20.07	18.0	26.0
020	21.07	19.0	27.0
021	22.07	20.0	28.0
022	23.07	21.0	29.0
023	24.07	22.0	30.0
024	25.07	23.0	31.0
025	26.07	24.0	32.0
026	27.07	25.0	33.0
027	28.07	26.0	34.0
028	29.07	27.0	35.0
029	30.07	28.0	36.0
030	31.07	29.0	37.0
031	32.07	30.0	38.0
032	33.07	31.0	39.0

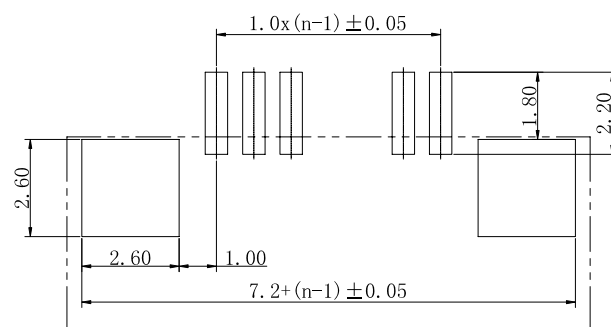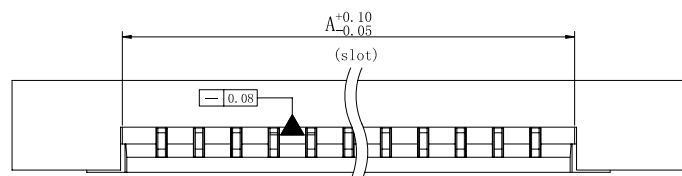

PC BOARD LAYOUT

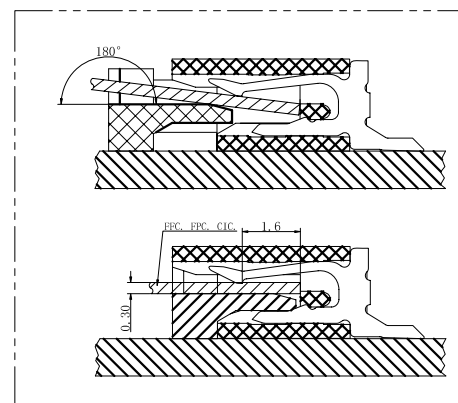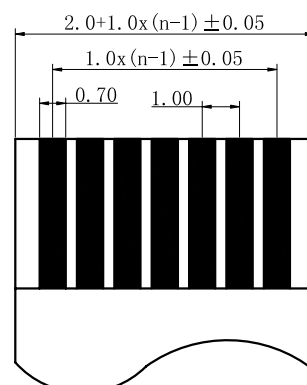GENERAL
TOLERANCE

X. ±0.30
.X ±0.25
.XX ±0.15
.XXX ±0.10

UNIT:mm

A4

ANGLE
TOLERANCE

X° ±5.0°
.X° ±3.0°
.XX° ±2.0°

SCALE 1:1

SHEET:1 of 1

DESIGN. Frank
设计 2015.05.19CHECKED.
审核APPROVED.
核准深圳市金科基电子有限公司
Jkj Electronic Co.,LtdFILE NAME.
品名 FPC1.0拉拔式半包上接PART NUMBER.
料号 1023A0-***-***MDRAWING NO.
图号 1023A0

REV. B