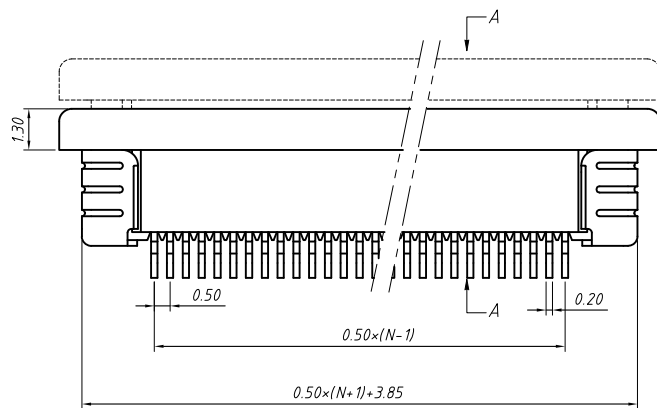


Material

Housing: LCP UL 94V-0

Terminal: Phosphor Bronze Tin-plated

Fitting Nial: Phosphor Bronze Tin-plated

Electrical

Voltage rating: 50 V

Current rating: 0.4 A

Withstanding Voltage: 200 V

Insulation resistance: 500M Ω .Min.

Contact resistance: 20 m Ω .Max.



Mechanical

Temp. Range: -25 °C ~ +85 °C


Order Information

L-KLS1- 1242E - 2.0- XX - T-L-R

Pack:
T-Tube R-Reel
L-Lower Contact
T-SMT Pin
No.Of pins
(06 ~ 60 pins)
Height: 2.0mm
Series No.
Pos. NO.
RoHS

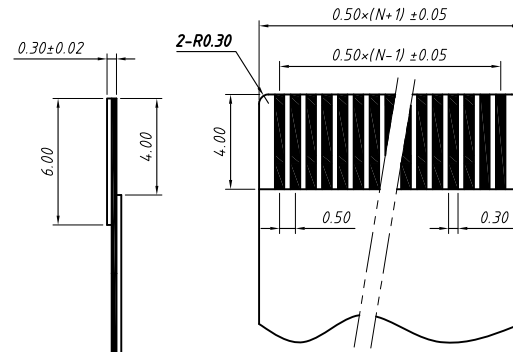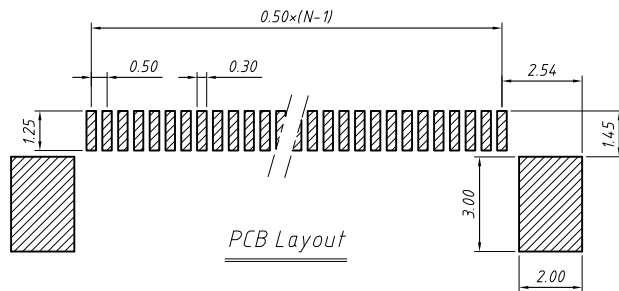

Proper Cable

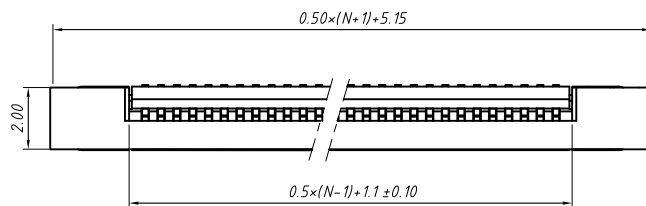

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	mm
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	A4
.XX ± 0.05	.XX $\pm 2^\circ$	KLS P/N:	CONN FFC 0.50mm, SMD, Horizontal, Lower Contact , with ZIF
			L-KLS1-1242E-2.0-XX-T-L-R

Draw by: Date

2018-03-10

Check by: Date

2018-03-10

SCALE

SHEET

OF



NingBo KLS ELECTRONIC CO.,L TD.