



### ■Features

- 5mm Standard Directivity
- Water clear Type
- Superior Weather-resistance
- UV Resistant Epoxy
- RoHS compliant

### ■Applications

- Automotive Dashboard Lighting
- Traffic signal lamp
- Back Lighting

### ■Outline Dimension

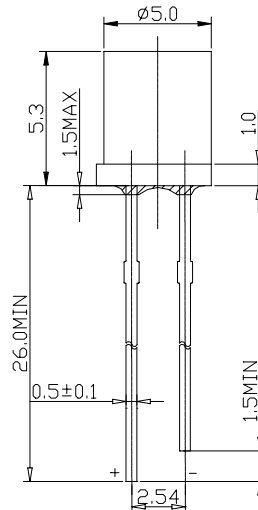

Unit :mm  
Tolerance :±0.25mm


### ■Absolute Maximum Rating

(Ta=25°C)

| Item                       | Symbol    | Value      | Unit |
|----------------------------|-----------|------------|------|
| DC Forward Current         | $I_F$     | 50         | mA   |
| Pulse Forward Current*     | $I_{FP}$  | 150        | mA   |
| Reverse Voltage            | $V_R$     | 5          | V    |
| Power Dissipation          | $P_D$     | 200        | mW   |
| Operating Temperature      | $T_{opr}$ | -30 ~ +85  | °C   |
| Storage Temperature        | $T_{stg}$ | -30 ~ +100 | °C   |
| Lead Soldering Temperature | $T_{sol}$ | 260°C/5sec | -    |

\*Pulse width Max.10ms Duty ratio max 1/10

### ■Directivity

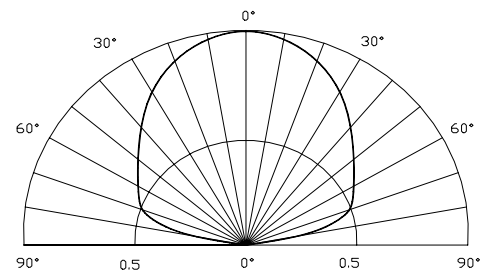

### ■Electrical -Optical Characteristics

(Ta=25°C)

| Item               | Symbol          | Condition  | Min. | Typ. | Max. | Unit |
|--------------------|-----------------|------------|------|------|------|------|
| DC Forward Voltage | $V_F$           | $I_F=20mA$ | 1.8  | 2.0  | 2.4  | V    |
| DC Reverse Current | $I_R$           | $V_R=5V$   | -    | -    | 10   | μA   |
| Domi. Wavelength   | $\lambda_D$     | $I_F=20mA$ | 620  | 625  | 630  | nm   |
| Luminous Intensity | $I_v$           | $I_F=20mA$ | 1120 | 1560 | 2180 | mcd  |
| 50% Power Angle    | $2\theta_{1/2}$ | $I_F=20mA$ | -    | 140  | -    | deg  |