



High Power LED

Edixeon®

3W Edixeon® Emitter

Approved By Customer	Designer	Checker	Approval

Date : 2006/11/13

Version : 3.3

EDISON OPTO CORPORATION

4F, No. 800, Chung-Cheng Rd,

Chung-Ho, Taipei 235, Taiwan

Tel: 886-2-8227-6996

Fax: 886-2-8227-6997

<http://www.edison-opto.com.tw>



3W Edixeon®



Edixeon® emitters are one of the highest flux LEDs in the world by Edison Opto. Edixeon® emitters are designed to satisfy more and more Solid-State lighting High Power LED applications for brilliant world such as flash light, indoor and outdoor decoration light. Edixeon® emitters are designed by particular package for High Power LED. 3W Edixeon® white has typical 100 lumens @700mA. Unlike most fluorescent sources, Edixeon® contains no mercury and has more energy efficient than other incandescent light source.

Features

- Various colors
- More energy efficient than incandescent and most halogen lamps
- Low voltage operated
- Instant light
- Long operating life

Typical Applications

- Reading lights
- Portable flashlight
- Up-lighters and Down-lighters
- LCD Backlights
- General lighting
- Contour lights
- Ceiling lights
- Garden lighting
- Decoration lights
- Architectural lighting
- Beacon lights


Edixeon® Technology

- $T_{jmax} = 135^{\circ}\text{C}$
- High Lumen performance
- Low thermal resistance 13°C/W
- RoHS compliant
- Industrial best lumen maintenance — 50,000hrs life at I_{Fmax} with 70% lumen if T_j is lower than 70°C



Package Outlines

Lambertian

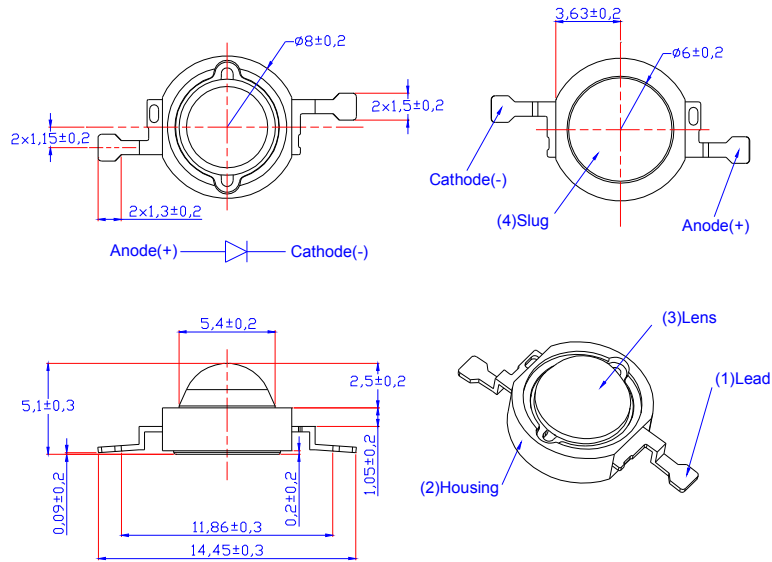

Notes:

1. All dimensions are in mm.
2. It is strongly recommended that the temperature of lead be not higher than 55°C
3. It is important that the slug can't contact aluminum surface, It is strongly recommended that there should coat an uniform electrically isolated heat dissipation film on the aluminum surface.

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
DC Forward Current	I_F	700	mA
Peak pulse current;(tp ≤ 100μs, Duty cycle=0.25) ^[1]	I_{pulse}	1000	mA
Peak pulse current;(tp ≤ 100μs, Duty cycle=0.25) ^[2]	I_{pulse}	1500	mA
Reverse Voltage	V_R	5	V
LED junction Temperature	T_j	135	°C
Forward Contact Voltage	V_{FC}	16	V
Operating Temperature	T_{opr}	-30 ~ +110	°C
Storage Temperature	T_{stg}	-40 ~ +120	°C
ESD Sensitivity	V_B	500	V
Manual Soldering Time at 260°C (Max.)	T_{sol}	5	seconds

Note:

1. There includes: White 、 Warm White 、 True Green 、 Blue
2. There includes: Red 、 Amber 、 Red Orange
3. Proper current derating must be observed to maintain junction temperature below the maximum.
4. LEDs are not designed to be driven in reserve bias.

Luminous Flux or Radiometric Power^[1] Characteristics at I_F=700mA (T_j=25°C)

Lens Item	Part Name	Color	Flux			Units
			Min.	Typ.	Max.	
Lambertian	EDEW-3LA1	White	66.5	100	--	lm
	EDEX-3LA1	Warm White	51.2	80	--	lm
	EDER-3LA3	Red	39.4	65	--	lm
	EDEO-3LA3	Red Orange	51.2	70	--	lm
	EDEA-3LA3	Amber	39.4	65	--	lm
	EDET-3LA1	True Green	51.2	90	--	lm
	EDEB-3LA1	Blue	13.8	30	--	lm
	EDEC-3LC1	Royal Blue ^[1]	256.3	350	--	mW

Forward Voltage Characteristics at I_F=700mA(T_j=25°C):

Lens Item	Part Name	Color	V _F			Units
			Min.	Typ.	Max.	
Lambertian	EDEW-3LA1	White	3.1	--	4.3	V
	EDEX-3LA1	Warm White	3.1	--	4.3	V
	EDER-3LA3	Red	2.0	--	3.0	V
	EDEO-3LA3	Red Orange	2.0	--	3.0	V
	EDEA-3LA3	Amber	2.0	--	3.0	V
	EDET-3LA1	True Green	2.8	--	4.0	V
	EDEB-3LA1	Blue	3.1	--	4.3	V
	EDEC-3LC1	Royal Blue	3.1	--	4.3	V

Dominant Wavelength or Peak Wavelength^[1] or CCT Characteristics at I_F=700mA(T_j=25°C):

Lens Item	Part Name	Color	λ _d /CCT			Units
			Min.	Typ.	Max.	
Lambertian	EDEW-3LA1	White	4500	--	10000	K
	EDEX-3LA1	Warm White	2800	--	3800	K
	EDER-3LA3	Red	620	--	630	nm
	EDEO-3LA3	Red Orange	610	--	620	nm
	EDEA-3LA3	Amber	585	--	595	nm
	EDET-3LA1	True Green	515	--	535	nm
	EDEB-3LA1	Blue	460	--	475	nm
	EDEC-3LC1	Royal Blue ^[1]	445	--	460	nm

Temperature Coefficient of Forward Voltage & Thermal Resistance Junction to Case Characteristics at $I_F=700\text{mA}(T_j=25^\circ\text{C})$:

Lens Item	Part Name	Color	$\Delta V_F/\Delta T$		$R\theta_{J-B}$	
			Typ.	Units	Typ.	Units
Lambertian	EDEW-3LA1	White	-2	mV/°C	13	°C/W
	EDEX-3LA1	Warm White	-2	mV/°C	13	°C/W
	EDER-3LA3	Red	-2	mV/°C	13	°C/W
	EDEO-3LA3	Red Orange	-2	mV/°C	13	°C/W
	EDEA-3LA3	Amber	-2	mV/°C	13	°C/W
	EDET-3LA1	True Green	-2	mV/°C	13	°C/W
	EDEB-3LA1	Blue	-2	mV/°C	13	°C/W
	EDEC-3LC1	Royal Blue	-2	mV/°C	10	°C/W

Emission Angle Characteristics at $I_F=700\text{mA}(T_j=25^\circ\text{C})$:

Part Name	Color	$2\Theta_{1/2}$			Units
		Max.	Typ.	Min.	
EDEW-3LA1	White	--	135	--	Degrees
EDEX-3LA1	Warm White	--	135	--	Degrees
EDER-3LA3	Red	--	120	--	Degrees
EDEO-3LA3	Red Orange	--	120	--	Degrees
EDEA-3LA3	Amber	--	120	--	Degrees
EDET-3LA1	True Green	--	150	--	Degrees
EDEB-3LA1	Blue	--	150	--	Degrees
EDEC-3LC1	Royal Blue	--	150	--	Degrees

Note

1. Flux is measured with an accuracy of $\pm 10\%$.
2. CCT selection acc. to CCT groups and an accuracy of $\pm 200\text{K}$
3. Forward Voltage is measured with an accuracy of $\pm 0.1\text{V}$
4. Wavelength is measured with an accuracy of $\pm 0.5\text{nm}$
5. All white 、warm white and blue emitters are built with InGaN
6. All red 、red-orange and amber emitters are built with AlGaInP

JEDEC Moisture Sensitivity:

Level	Floor Life		Soak Requirements			
	Time	Conditions	Standard Time (hours)	Conditions	Accelerated Environment Time (hours)	Conditions
4	72hours	$\leq 30^{\circ}\text{C}$ / 60% RH	96 +2/-0	30°C / 60% RH	20 +0.5/-0	60°C / 60% RH

LEVEL	FLOOR LIFE		SOAK REQUIREMENTS			
			STANDARD		ACCELERATED EQUIVALENT ¹	
	TIME	CONDITIONS	TIME (hours)	CONDITIONS	TIME (hours)	CONDITIONS
1	Unlimited	$\leq 30^{\circ}\text{C}/85\% \text{ RH}$	168 +5/-0	85°C/85% RH		
2	1 year	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	168 +5/-0	85°C/60% RH		
2a	4 weeks	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	696 ² +5/-0	30°C/60% RH	120 +1/-0	60°C/60% RH
3	168 hours	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	168 ² +5/-0	30°C/60% RH	40 +1/-0	60°C/60% RH
4	72 hours	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	96 ² +2/-0	30°C/60% RH	20 +0.5/-0	60°C/60% RH
5	48 hours	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	72 ² +2/-0	30°C/60% RH	15 +0.5/-0	60°C/60% RH
5a	24 hours	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	48 ² +2/-0	30°C/60% RH	10 +0.5/-0	60°C/60% RH
6	Time on Label (TOL)	$\leq 30^{\circ}\text{C}/60\% \text{ RH}$	TOL	30°C/60% RH		

Note

1. The standard soak time includes a default value of 24 hours for semiconductor manufacturer's exposure time (MET) between bake and bag and includes the maximum time allowed out of the bag at the distributor's facility.

Operating life, mechanical, and environmental tests performed on Edixeon® package:

Stress Test	Stress Conditions	Stress Duration	Failure Criteria
Room Temperature Operating Life	25°C, $I_F = \text{max DC}$ (Note 1)	1000 hours	Note 2
High Temperature High Humidity	85°C / 85%RH	1000 hours	Note 2
Temperature Cycle	-40°C/100°C ,30 min dwell / <5min transfer	200 cycles	Note 2
High Temperature Storage Life	110°C	1000 hours	Note 2
Low Temperature Storage Life	-55°C	1000 hours	Note 2
Thermal Shock	-40 / 120°C, 20 min dwell / <20 sec transfer	200 cycles	No catastrophics
Mechanical Shock	1500 G, 0.5 msec pulse, 5 shocks each 6 axis		No catastrophics
Natural Drop	On concrete from 1.2 m, 3X		No catastrophics
Variable Vibration Frequency	10-2000-10 Hz, log or linear sweep rate, 20 G about 1 min, 1.5 mm, 3X/axis		No catastrophics
Solder Heat Resistance (SHR)	260°C $\pm$ 5°C, 10 sec		No catastrophics
Solderability	Steam age for 16 hr, then solder dip at 260°C for 5 sec		Solder coverage on lead

Note

1. Depending on the maximum derating curve.

2. Failure Criteria:

Electrical failures

V_F shift $\geq 10\%$

$I_R < 50\mu\text{A}$ @ $V_R = 5\text{V}$

Light Output Degradation

% I_v shift $\geq 30\%$ @1000hrs or 200cycle


Visual failures

Broken or damaged package or lead

Solderability < 95% wetting

Dimension out of tolerance

Burn-in Condition Edixeon® Reliability

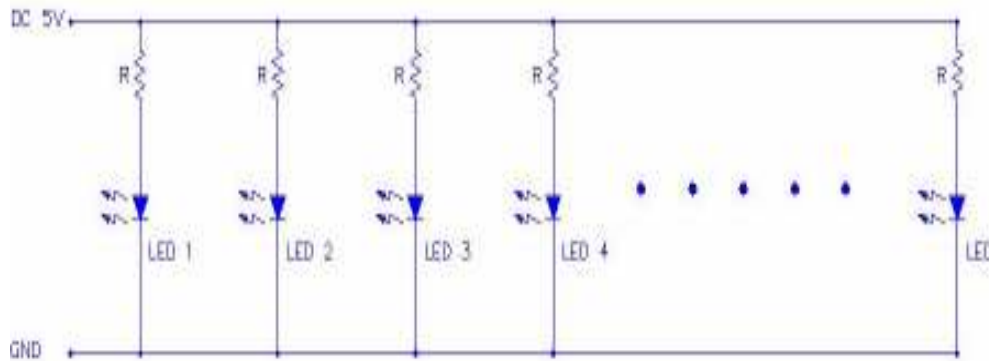

When we talk about MTBF of Edixeon®, we can provide a formula for customers.

$$\log(\text{Life}) = \frac{1600}{T_j(^{\circ}\text{C}) + 273}$$

Life means the time light output becomes 70%

T _j (°C)	Life (hours)	T _j (°C)	Life (hours)
25	234,000	85	29,500
30	191,000	90	25,700
35	157,000	95	22,300
40	129,000	100	19,500
45	107,000	105	17,100
50	90,000	110	15,100
55	75,000	115	13,300
60	64,000	120	11,700
65	54,000	125	10,500
70	46,000	130	9,300
75	39,600	140	7,500
80	34,000	150	6,000

When we talk about MTTF of Edixeon®, we can provide a formula for customers_
 MTTF is assumed to be 100,000,000

The failure rates at different hours and different systems(LED quantity) are as below:

if there is 1 failure of 1 emitter in a system

Tj=75°C is giving 0.01%(100ppm) at 10,000hrs

if there is 1 failure of 10 emitters in a system

Tj=75°C is giving 0.1%(1,000ppm) at 10,000hrs

if there is 1 failure of 1 emitter in a system

Tj=75°C is giving 0.05%(500ppm) at 50,000hrs

if there is 1 failure of 10 emitters in a system

Tj=75°C is giving 0.5%(5,000ppm) at 50,000hrs if there are 10 emitters

How to Know Tj in Your Application?

Rth(junction to case)=13°C/W

The thermal grease is 200um.

K(Aluminum PCB)=2.6 W/mk

Then Rth(case to board)= $\frac{200}{2.6 \times (6.4/2)^2 \pi}$ =2.4 °C/W

The Rth between board and air is mainly dependent on the total surface air.




Rth(board-air)≐ $\frac{500}{\text{Area}(\text{cm}^2)}$

If Area is 30cm ²	Rth=16.7	ΔT(junction-air)=(13+2.4+16.7)x3=96.3 °C
If Area is 60cm ²	Rth=8.3	ΔT (junction-air)=(13+2.4+8.3)x3=71.1 °C
If Area is 90cm ²	Rth=5.5	ΔT (junction-air)=(13+2.4+5.5)x3=62.7 °C


ASSIST FORM about High Power LED Reliability(White Edixeon®)

	Ts=45°C	Ts=65°C	Ts=85°C
Voltage	3.6V	3.6V	3.6V
Current	700mA	700mA	700mA
Wattage	2.5W	2.5W	2.5W
Heat	2.0W	2.0W	2.0W
Rth	13 °C/W	13 °C/W	13 °C/W
Tj	71 °C	91 °C	111 °C
L70%	46,000hrs	25,700hrs	15,100hrs


Electrical & Optical Curves-Spectrum

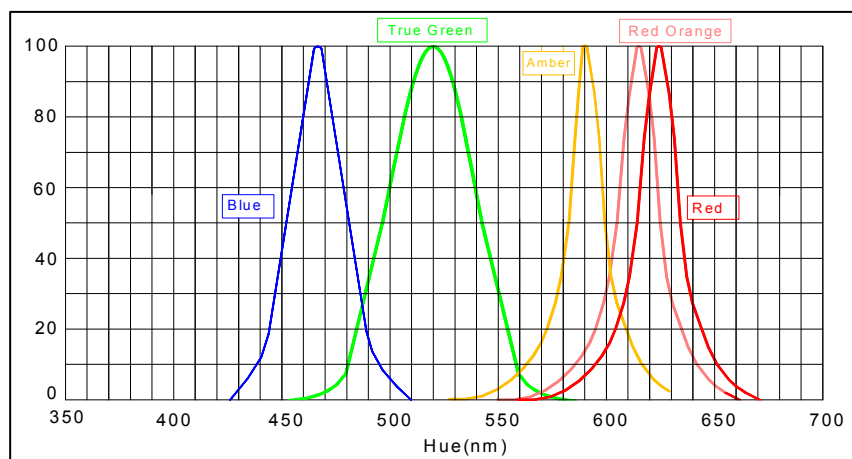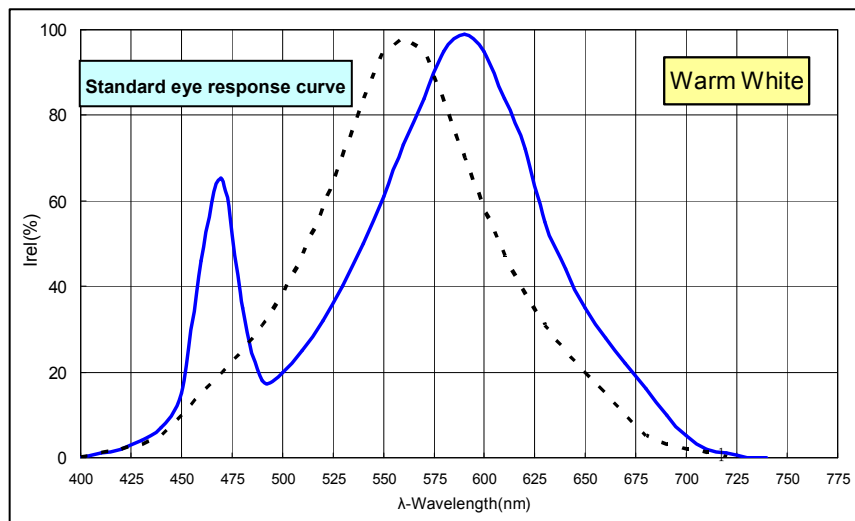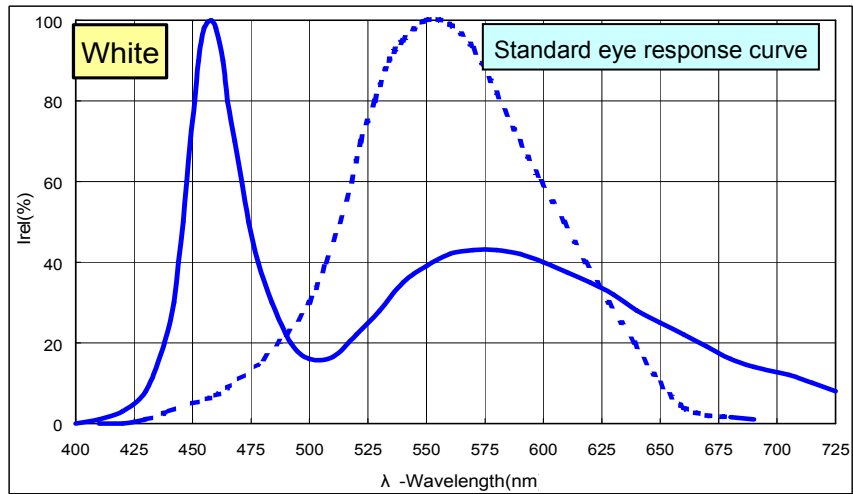


Typical Radiation Pattern for Lambertian

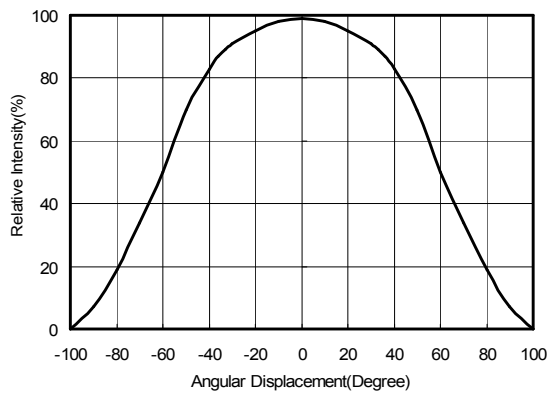

for Red 、Amber 、Red Orange

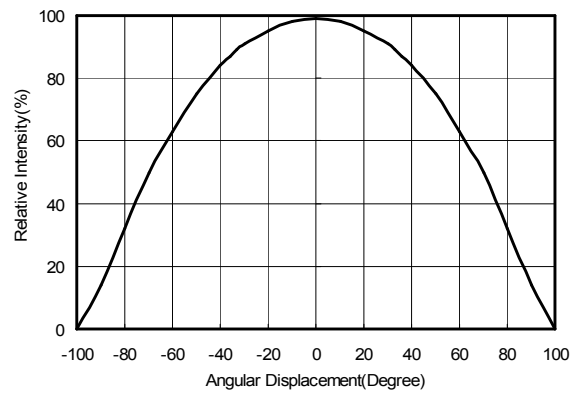


for White 、Warm white

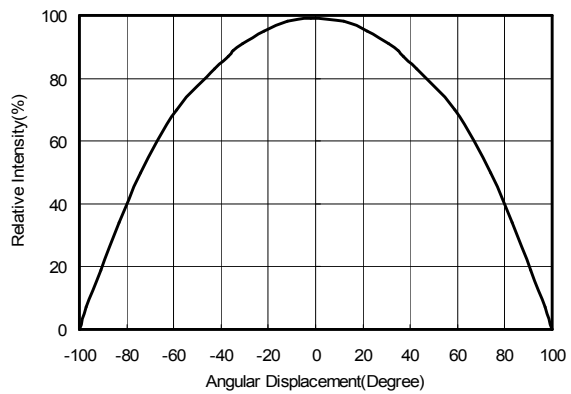


for Blue 、True Green

Typical Optical and Electrical Curves

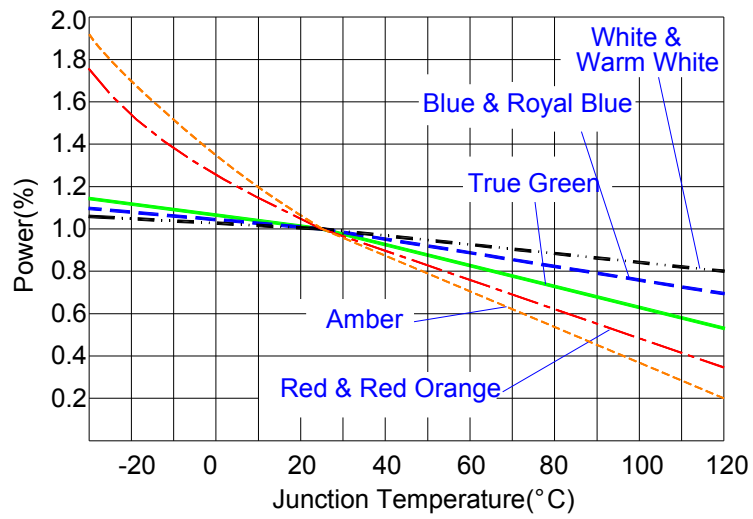


Junction Temperature & Forward Voltage

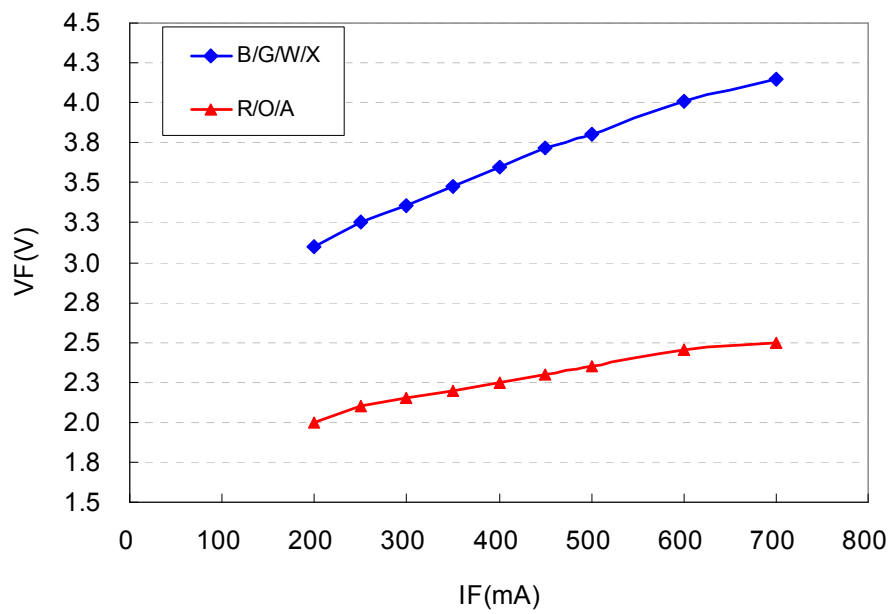


Operating Current & Forward Voltage


Typical Optical and Electrical Curves

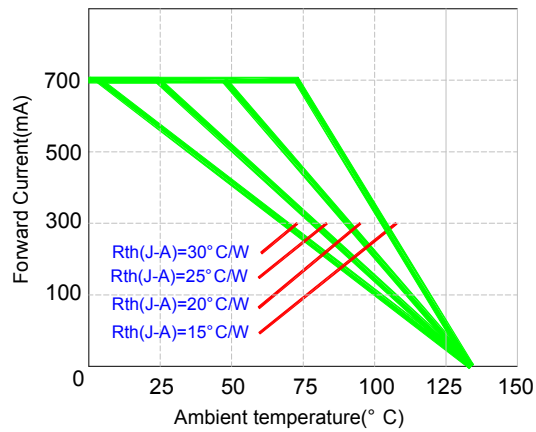



Operating Current & Ambient Temperature

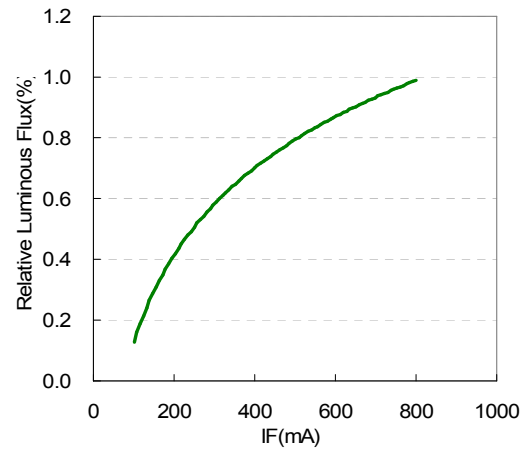


Forward Current & Luminous Flux

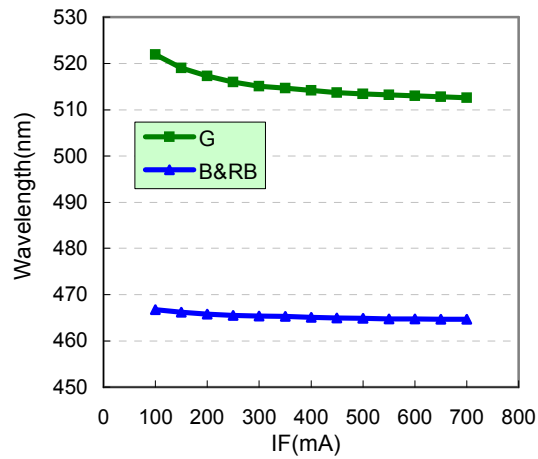

Forward Current & Wavelength

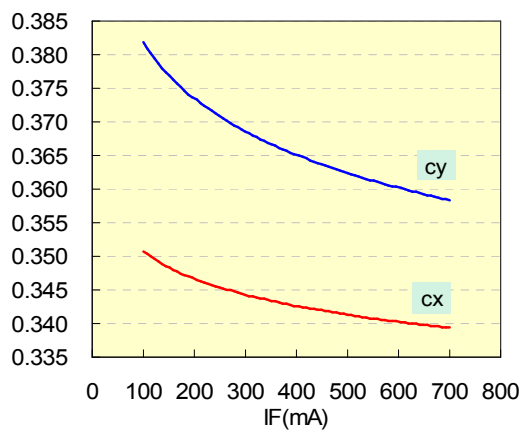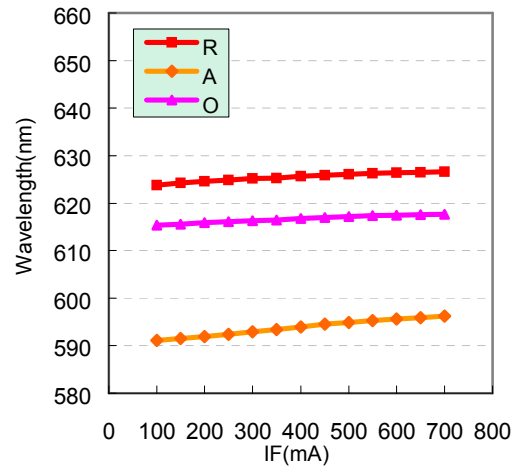


Forward Current & chromaticity coordinate

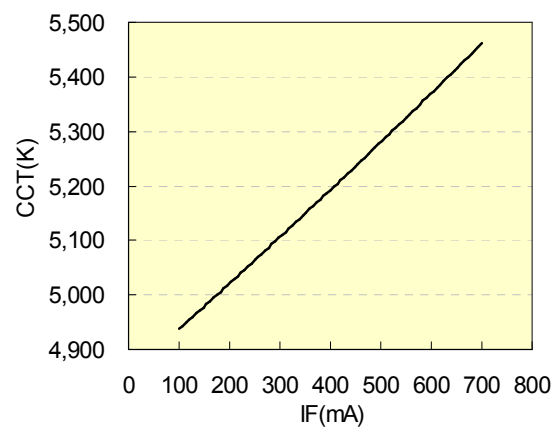

Forward Current & CCT


Recommended Solder Pad Design

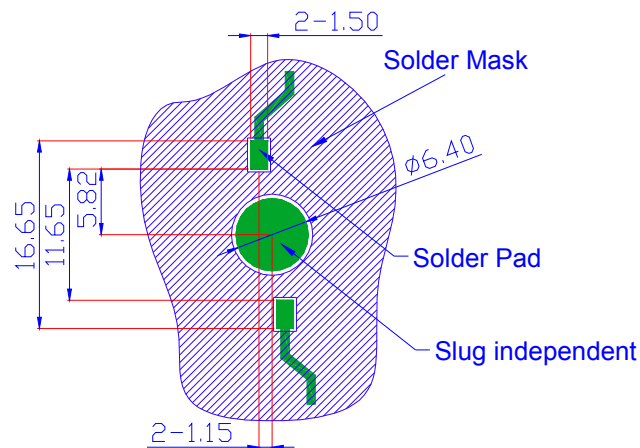

Note

Solder pad can't be connected to slug.

Recommend Solder Steps

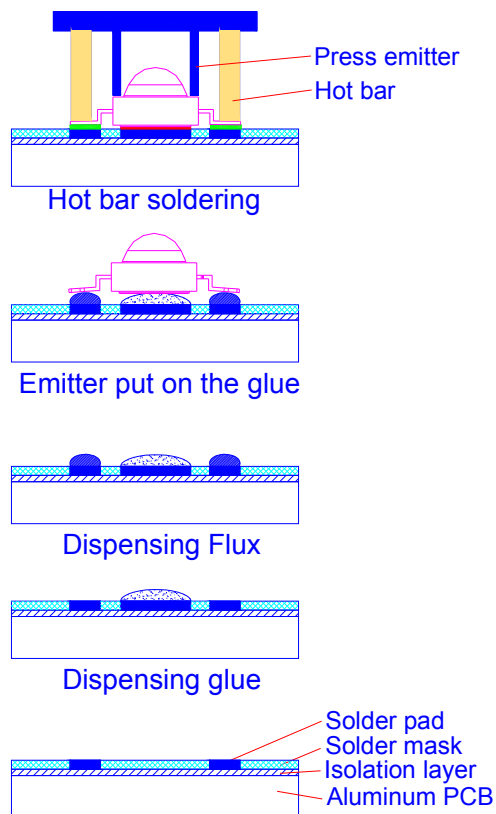

Notes

1. Aluminum PCB material with a thermal conductivity greater than 2.0 W/mK.
2. Solder pad can't be connected to slug.
3. The Thermal glue should be as thin as possible for better heat conductivity.
4. During any assembly process touching lens is avoided. This will cause pollution or scratch on the surface of lens.
5. Thermal glue with a thermal conductivity greater than 2.0 W/mK and the thickness must be less than 100µm.

Adhesive for Emitter to Aluminum PCB

Suggestion:

- Ease of use
 - Non-solvent, One-part
- Fast tack free
 - 3 minutes at 25°C
- No corrosion
 - Alcohol type of RTV
- Low volatility
 - Low weight loss of silicone volatiles
- Adhesion
 - Excellent adhesion to most materials without use of a primer
- Dielectric properties
 - Cured rubber exhibits good dielectric properties
- Excellent thermal stability and cold resistance
 - Cured rubber provides wide service temperature range

Typical Properties

Specification	Suggested Properties
Take-free time	3~10 minutes
Specific gravity	< 3 g/cm ²
Thermal conductivity	> 2.5 W/mK
Rth in using	< 1.8 °C/W
Volume resistance	> 1x10 ¹⁴
Lap shear adhesion strength	> 200 N/ cm ²
Tensile strength	> 4 Mpa

Thrust for Edixeon® Lens

Lens Type	Typical Thrust
Lambertian Lens	5 kgf


Package Specifications




Cathode



Anode

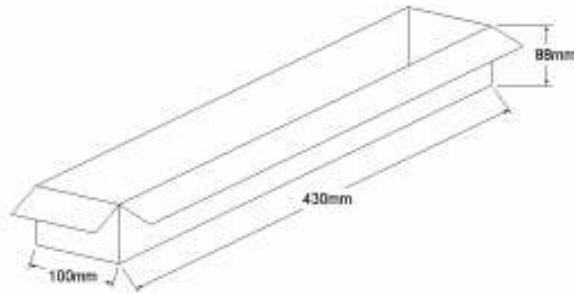

Antistatic bag

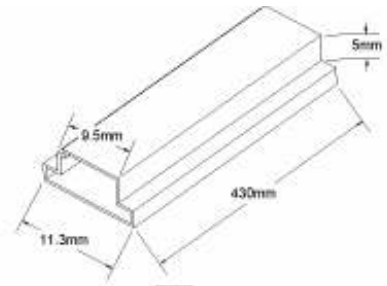

Tube



Humidity indicator card



Drying agent

Notes

1. There are 50pcs emitters in a tube
2. There are 20 tubes in a bag
3. There are 2 bags in an inner box
4. A bag contains one humidity indicator card and drying agent

Packing Step	Type	Dimension(mm)	Emitter Q'ty(Max.)
1	Tube	430*13	50
2	Inner Box	430*100*88	1,000
3	Outer Box	460*196*135	2,000