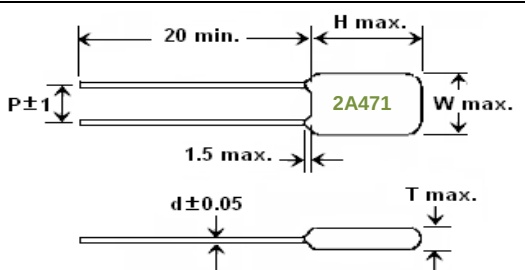
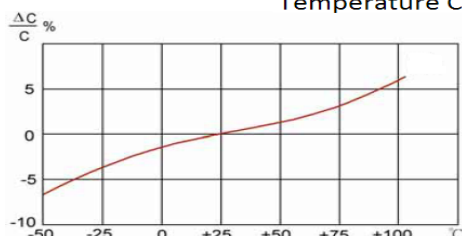
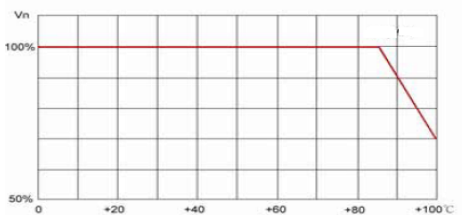
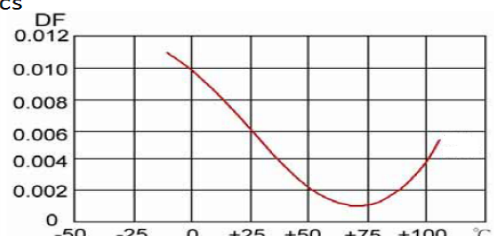
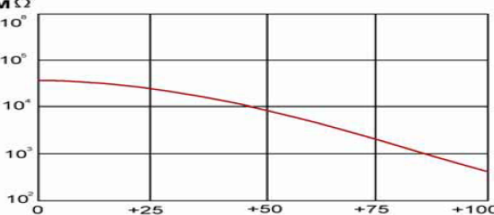
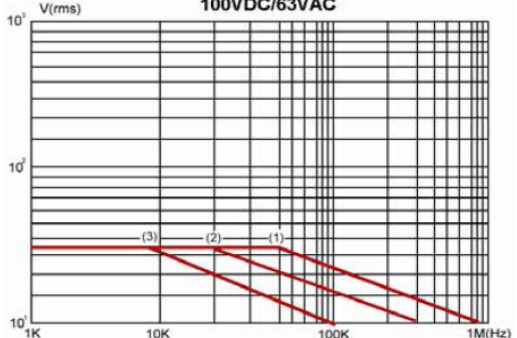
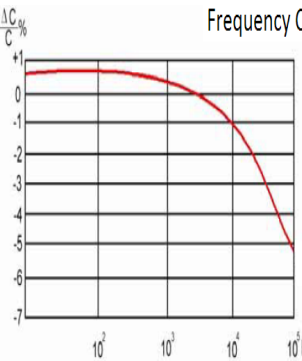
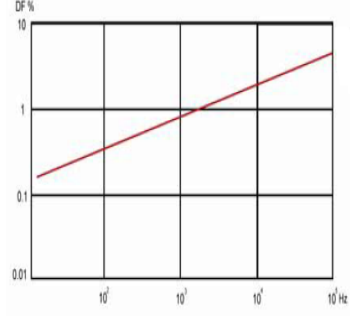


SPECIFICATION FOR APPROVAL

Polyester Film Capacitor. PEI Series					
CUSTOMER:				Issue Day. 28/03/2017	
Capacitance: 470 pF		Tolerance: ±10 %		W V 100 VDC	
Lot No.		Part No. PEI471K2AB		Your Confirmation	
Shape & Dimension				Unit : mm	
				W: <u>7.0 max.</u> H: <u>10.0 max.</u> T: <u>4.0 max.</u> P: <u>5.0 ±1.0</u> L: <u>20.0 min.</u> d: <u>0.5 ±0.05</u>	
APPROVAL					
CONDITIONAL APPROVAL					
REJECTION					
(Please send a copy for our ref.)					
SPECIFICATION					
1	Operating Temperature : -40°C ~ +85°C				
2	Dissipation Factor : 1.0% Max. at 1KHz, 25°C				
3	Insulation Resistance : >20,000 MΩ				
4	Dielectric Strength Test : 200 VDC for 1 ~ 5 Sec.				
5	Characteristics Curves :				
Temperature Characteristics    					
Rated Voltage v Frequency 100VDC/63VAC  Curve: (1)0.01uF (2)0.47uF (3)4.7uF Frequency Characteristics  					
Inspected by		Checked by		Approved by	
		吳美華		許介洲	