

规格书

客 户 (CUSTOMER): _____

客户料号 (CUSTOMER P/N): _____

产品名称 (DESCRIPTION): HC—49S 晶体谐振器

使用规格 (APPLICATION): 13.52127MHZ 20PPM/20PF

产品编号 (DRAWING NO): FD——49S13.52127

客户确认签章 (APPROVED SIGNATURE):

石英谐振器 QUARTZ CRYTAL
RESONATOR
13.52127MHZ


1	盒型 HOLDER TYPE	HC—49S
2	标称频率 NOMINAL FREQ	13.52127MHZ
3	振动模式 MODE OF OSC	基频
4	调整频差 FREQ.STABILITY	±20PPM
5	温度频差 FREQ.TOLERANCE	±20PPM
6	谐振电阻 RESONATE RESISTOR	30Ω
7	工作温度	-20~+70℃

	OPERATING TEMP	
8	负载电容 LOAD CAP	20PF
9	激励功率 DRIVE LEVEL	100 μ W
10	静电容 SHUNT CAP	≤ 7.0 PF
11	绝缘电阻 INSULATION R	$\geq 500M\Omega$ (100VDC)
12	漏气率 LEAKING R	2*10 ⁻⁸ ATM.CC/SEC
13	老化率 AGING	15PPM/YEAR

石英晶体谐振器规格尺寸及等效电路

规格尺寸:

等效电路:

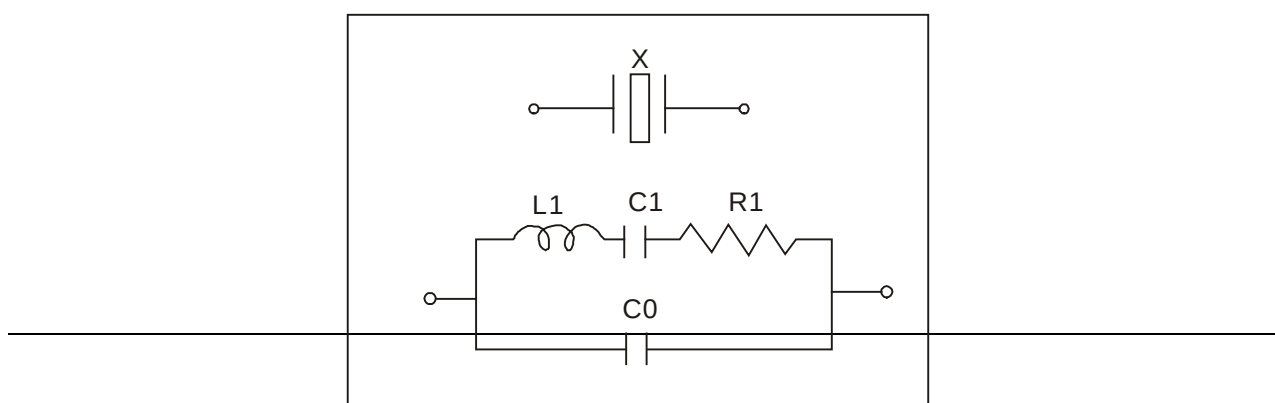

FIG,1-1,EQUIVALENT CIRCUIT