

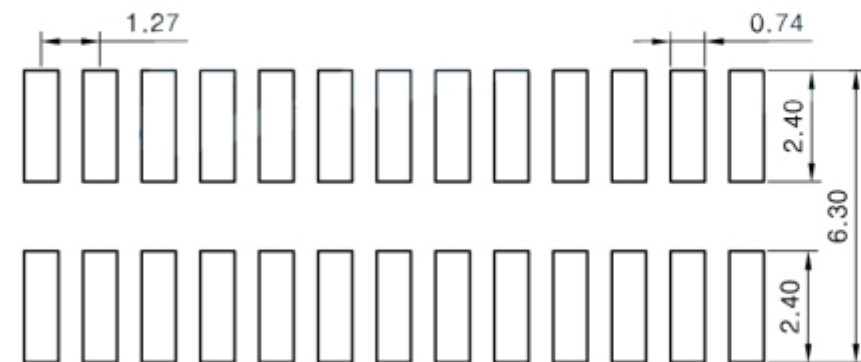
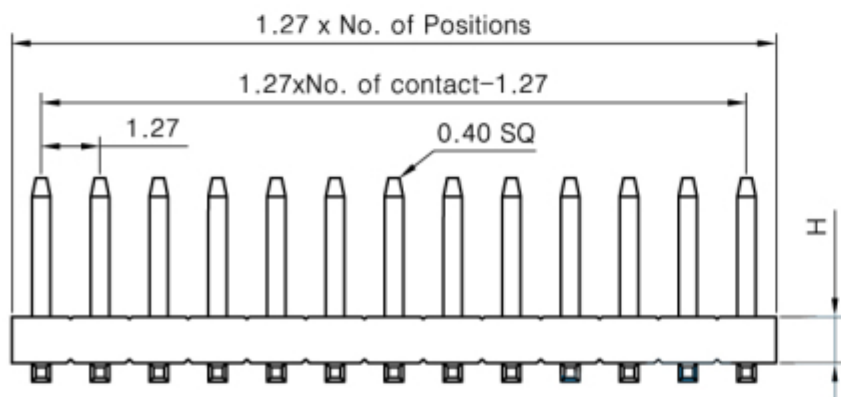


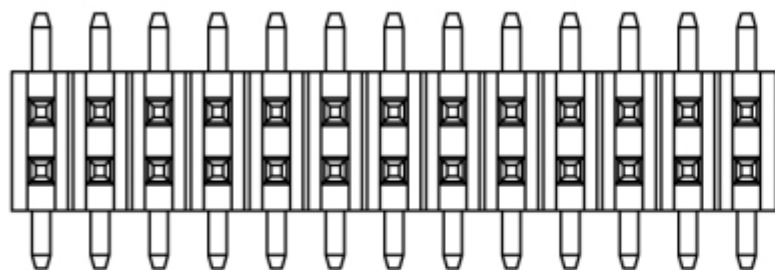

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

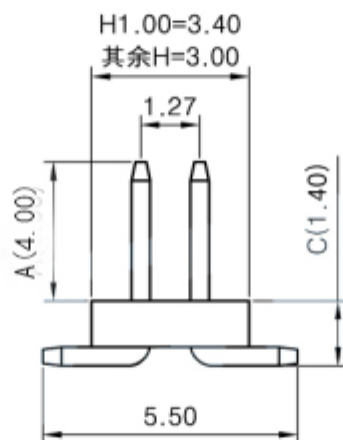

SPECIFICATIONS

Current Rating: 1A

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstand Voltage: 300V AC/minute

Operation Temperature: -40℃ to +105℃

Contact Material: Brass

Contact Plating: Au or Sn over 50μ"Ni

Insulator Material: Polyester(UL94V-0)

Part Number:

33X 2 NN X X 3 0000

Height of Insulator: J

(Unit:mm)

1-1.00, 2-2.00, 3-2.50

7-1.70, 5-1.50

Number of Row:

2-Double Row

Pin number of each row:

01 ~ 40 PIN

Insulator Material:

1-PBT

2-LCP

3-PPS

4-PA46

5-PA6T

9-PA9T

Tail & Mounting Style:

3-Surface mount-perpendicular

Contact Plated:

0-Tin over nickel

1-Gold flash over nickel

3-0.075um gold over nickel, 5-0.125um gold over nickel

6-0.25um gold over nickel, 7-0.375um gold over nickel

8-0.75um gold over nickel, A-0.02um gold over nickel

B-0.01um gold over nickel

2-0.05um gold over nickel