

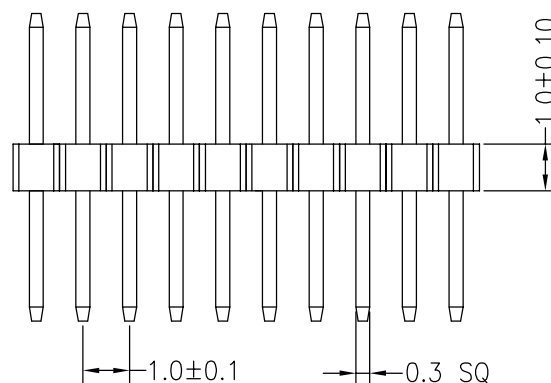
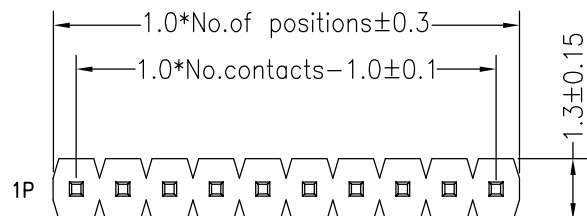


Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating: Au Over Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

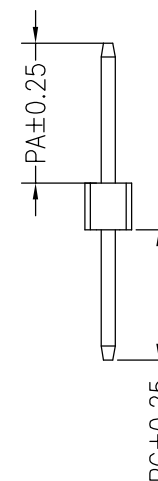

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

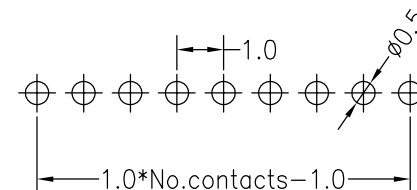

Dimension antitheses list			
ITEM	PA	PC	L
Standard	5.00	6.00	12.00
Alternate			

				OPERATION		DRAW	BEN	12.03.28	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-207G-1-12-S-6.0*5.0*12
				X.XXX	±0.10				SHEET	1/1		
A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	1.0mm Pin Header H1.0mm 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							