
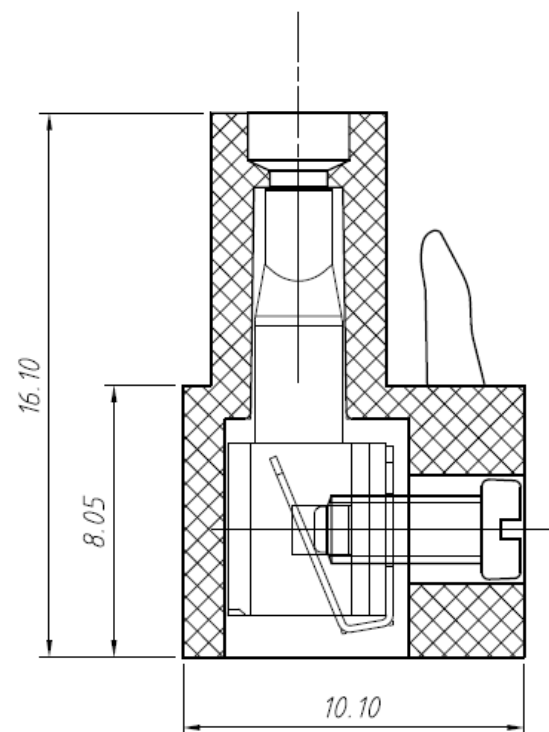
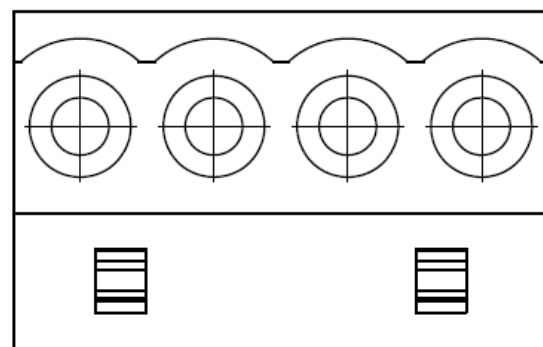


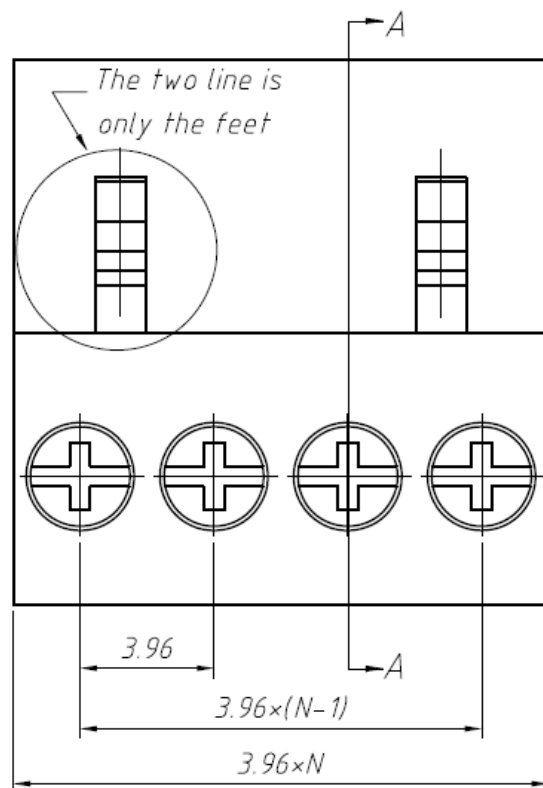

SECTION A-A

L-KLS-EDK-3.96-08P-4 C 00

L-KLS-EDK-3.96-05P-4 C 00

L-KLS-EDK-3.96-03P-4 C 00

Material
Housing: PA66, UL 94 V-0
Clamp: Bronze, Ni Plated
Screws: M2 Steel, Zn plated
Shrapnel: Brass, Ni plated

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~16AWG 1.0mm²

Mechanical
Temp. Range: -40 °C ~ +105 °C
Torque: 0.2Nm(1.7 bin)

Order Information

L-KLS2-EDK-3.96-XXP-4S00

RoHS

Terminal Block

Pitch

No. of Pole

Color: 4- Green

Screw: S-Slot Screw C-Cross Screw

Product Code: 00~99

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X.	±0.60	X.	±5°	Plug-in TERM BLOCK 3.96MM	
.X	±0.38	.X	±3°		
.XX	±0.25	.XX	±2°		
Draw by	2015-09-01	PROJECTION		KLS P/N:	KLS2-EDK-3.96-XXP-4S-00
Check by	2015-09-15	UNITS	mm		NingBo KLS ELECTRONIC CO.,LTD.
SCALE		SHEET SIZE	A4		