SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

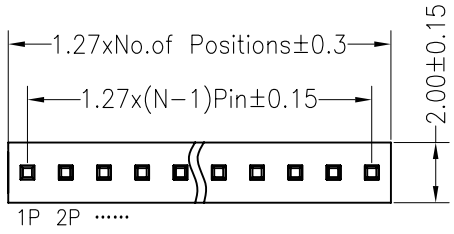

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

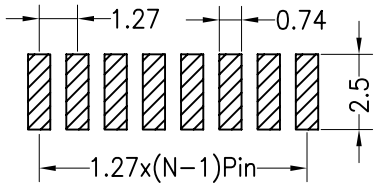

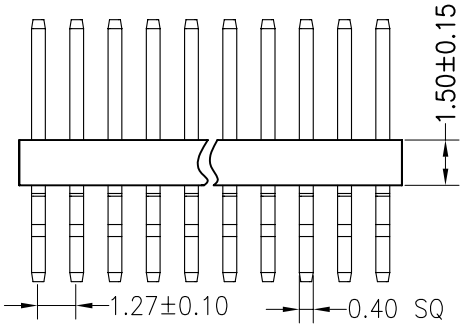



Dimension antitheses list		
ITEM	PA	L
Standard	4.00	8.80
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.19	NEW DRAWING	

OPERATION					
X.X	±0.30	DRAW	WZG	14.08.16	SCALE FIT
X.XX	±0.20	CHECK			UNIT mm
X.XXX	±0.10				SIZE A4
Angle	±3°	APPROVE			SHEET 1/1
DIM	TOL				PROJ.

NINGBO KLS ELECTRONIC CO.,LTD

PART NO. L-KLS1-207CA-1.5-1-11-RT

TITLE: 1.27PH 1xnPin H1.5 卧贴