
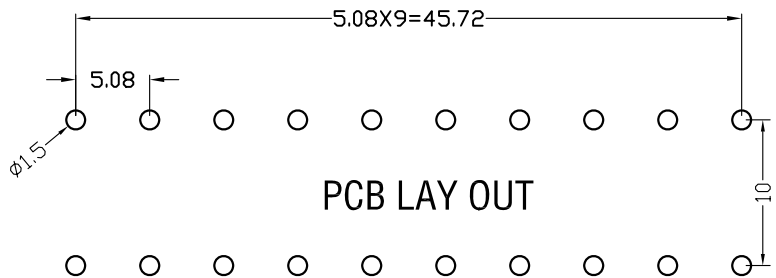
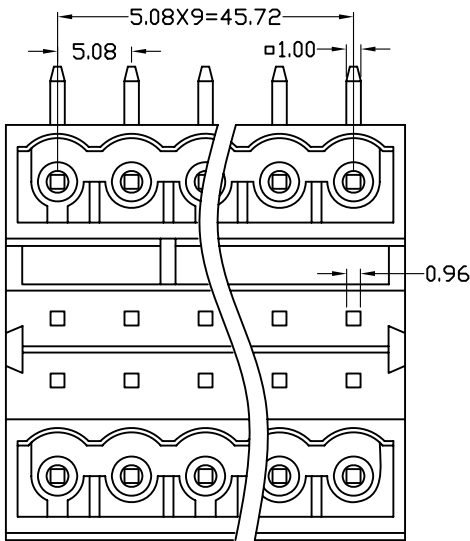
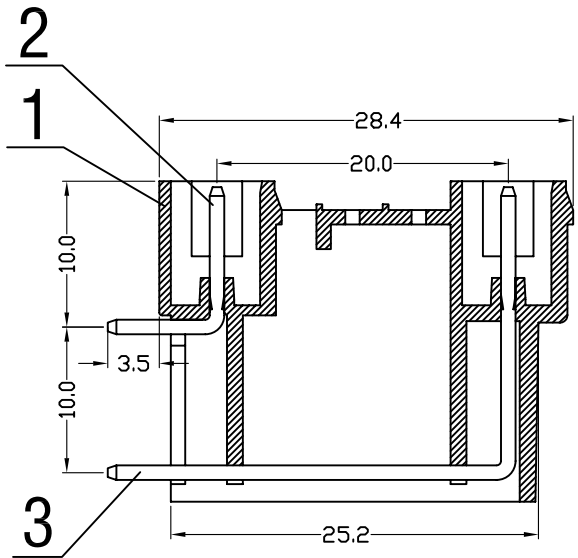


序号/RevNo.	名称/Title	文件编号/File No.
1	XY2500HV-B 塑件	
2	XY2500R 端子	
3	XY2500HR 端子	

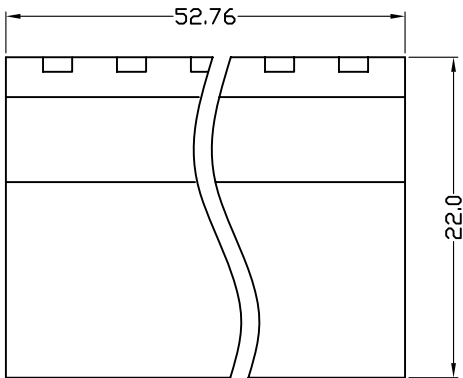

300V 15A
Poles: 10P
Pitch: 5.08 mm

Materials
Housing: PA66(UL 94V-0)
Solder Pin: Brass,Tin Plated

Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							-	∩	∇
0	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150	0.1/10			
TO	TO	TO	TO	TO	TO	TO	TO				
6	10	24	30	60	100	150					
±0.10	±0.15	±0.20	±0.25	±0.40	±0.50	±0.70	±1.0	±2°			

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by
X 新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title	文件编号/File No.
		XY2500HR-B 产品图	QJ/XYT-2290600
		版本/Version	A0
		备注/Remark	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date