


Cable Assembly Specification

Rosenberger NA p/n: L71-802-XXX

Rosenberger®
Rosenberger of North America, LLC

RoHS Compliant

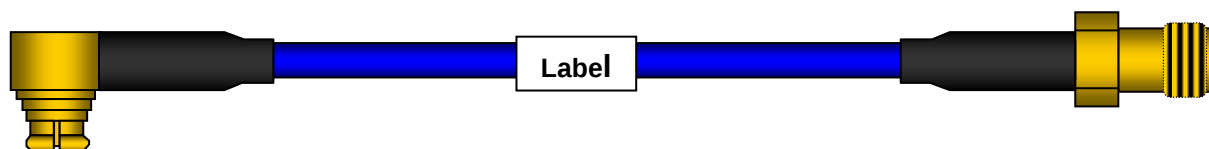

Description

Rosenberger: Cable: RTK-FS 085-FEP/SPCW

Connector Combination: SMP female right angle / SMA+ female straight

Length in millimeters: XXX

General Electrical Specifications

Impedance:	50 $\pm$ 2 Ohms
Operating Frequency:	DC to 26 GHz
Return Loss:	14 dB min up to 26 GHz
Cable Insertion Loss:	4.8 dB/m @ 26 GHz (typical)
Velocity of Propagation:	70% nominal
Shielding Effectiveness:	>100 dB @ 1GHz
Working Voltage:	850 Vrms

Mechanical Specification

Cable Diameter:	2.64 mm nominal
Minimum Bend Radius:	6 mm
Mating Torque: SMA+	8.1 Nm to 13 Nm
Engagement/Disengagement Force: SMP	45 N max / 9 N min – Limited Detent Mating Connector
Mating Cycles: SMP / SMA+	> 500
Temperature Range:	-55°C to +125°C

MATERIALS AND FINISHES

Cable:	RTK-FS 085-FEP; SCPW Center Conductor, Per MIL-STD-348 Hybrid
Connector Interface:	
Connector Types, Material & Plating:	SMA+: Outer contact: gold plated beryllium copper or equivalent Dielectric: PTFE Center contact: gold plated brass
	SMP: Outer & center contact: gold plated beryllium copper or equivalent Dielectric: PTFE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger:

[L71-802-102](#) [L71-802-153](#) [L71-802-305](#) [L71-802-203](#) [L71-802-457](#)