
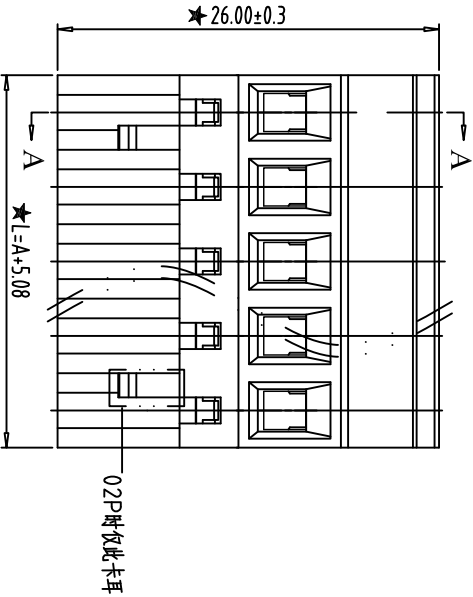
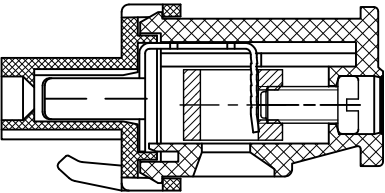
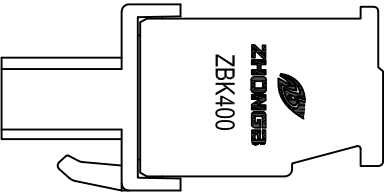
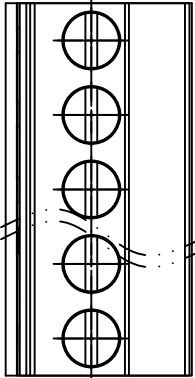


NOTES:

- 1. Rating:300V 15A;
- 2. Insulation Withstands Voltage: AC2000V/MIN
- 3. Insulation Resistance:
500MΩ or more at DC500V
- 4. Using Temperature Range: -40℃~+105℃
- 5. Screw Torque Value:0.4N.m
- 6. Suitable Electric Wire: 28~14AWG
- 7. "★" is the important dimension.

SECTION:A-A

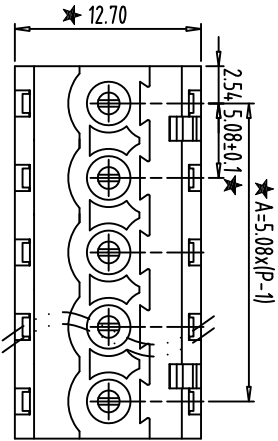

A		Total Pitch Tolerances												Nominal dimension range												T	≡	—	//
		in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	all	0	100	100	150	150	150	150		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10											
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5					
		6												5						4									

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE	
DWG.	SK	DATE	2014/09/25		SIZE	A4	UNITS	mm	SHEET/OF
CHK.		DATE			SCALE	2:1		2EDGKA-508	
APP.		DATE			NAME	ZBK400A-XXP-XS			
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD					DWGNO.	ZB-02-ZBK400AXXPXS			