
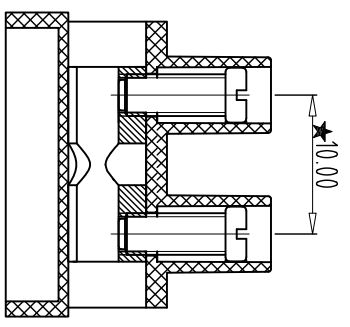
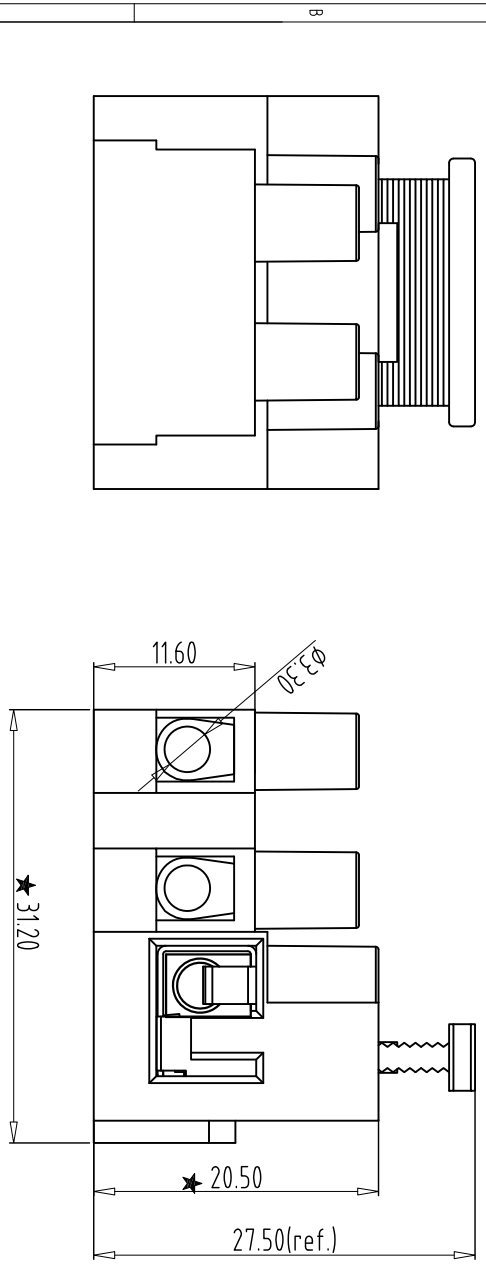


- NOTES:
1. Rating:450V 7.5A;
 2. Insulation Withstands Voltage: AC2500V/MIN
 3. Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range: -40 $^{\circ}$ C/+105 $^{\circ}$ C
 5. Screw Torque Vlaue:0.5N.m
 6. Suitable Electric Wire: 22~14AWG
 7. "★" is the important dimension.

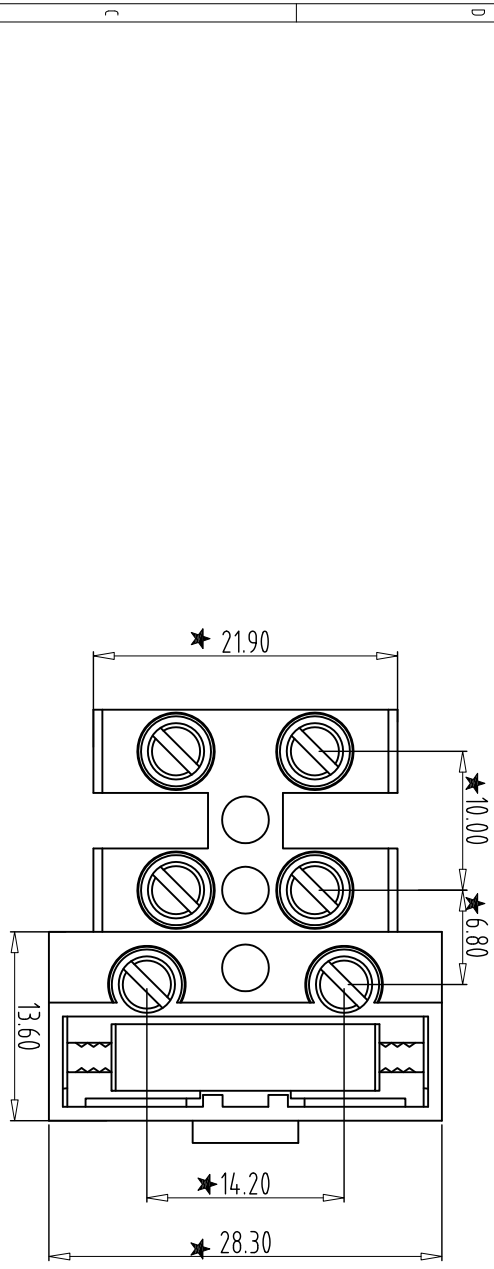

A		Total Pitch Tolerances												Nominal dimension range												—		//															
		in mm												in mm																													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over															
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	all	0	100	150	0	100	150	0	100															
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to															
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	10	100	150	150	150	150	150	150	150	150															
±0.18~±0.20		±0.25		±0.35		±0.44		±0.60		±0.70		±0.85		±0.20		±0.25		±0.30		±0.35		±0.44		±0.55		±0.70		±0.80		±0.90		0.2		0.3		0.3		0.2		0.3		0.5	
6																																											
																												</															

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZX	DATE		A4	SHEET/OF 1/1
CHK	DATE				ZB-800
APP.	DATE				ZB1800-XXP-XS
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD			DWGNO.	/	