





SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

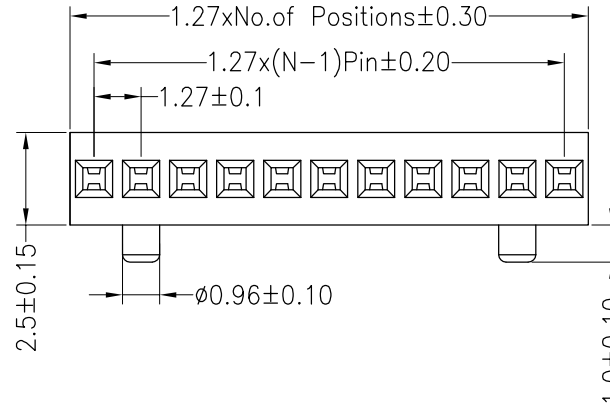

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

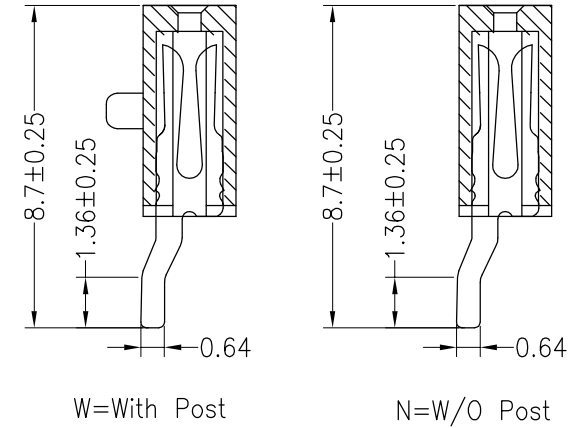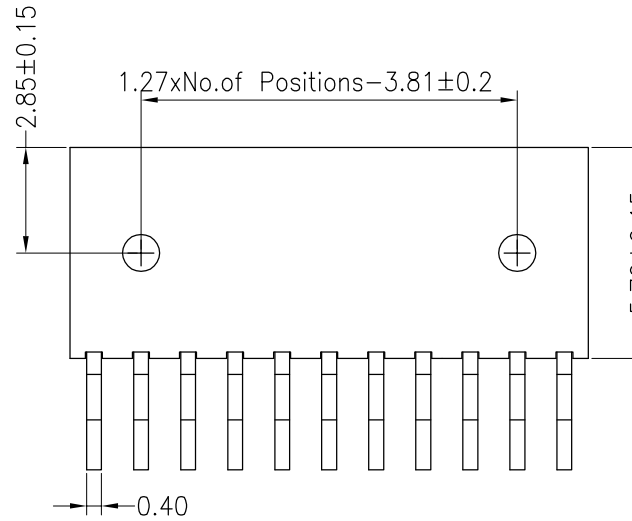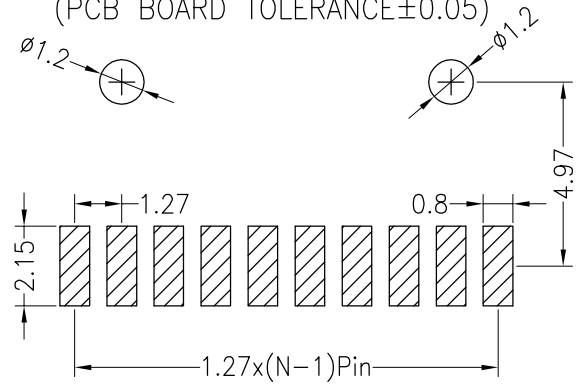

OPERATION

DRAW

YiYuSheng

17.03.18

SCALE

FIT

KLS ELECTRONIC CO., LTD

X.X ±0.30

±0.30

X.XX ±0.20

±0.20

X.XXX ±0.10

±0.10

Angle ±3°

±3°

DIM

TOL

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

PART NO. L-KLS1-208CA-5.7-1-11-RT3-R

TITLE: 1.27PF 1xNPIN H5.7 Y-Type 90° SMT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	1/1	1/1	1/1
-----	------	--------------------------	--------	-----	-----	---------	-------	-----	-----	-----