
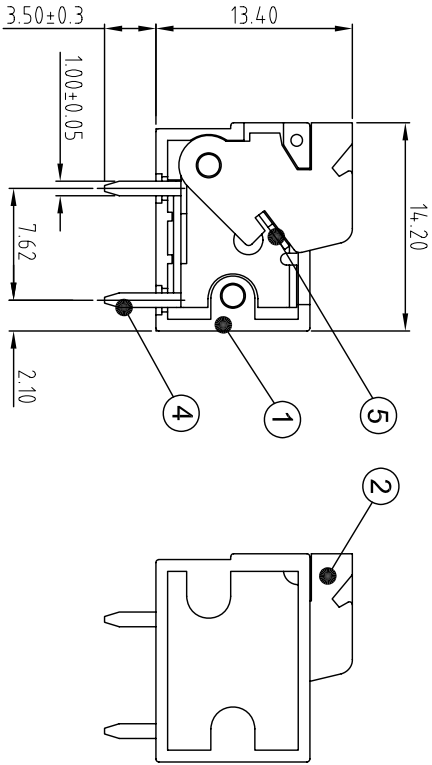
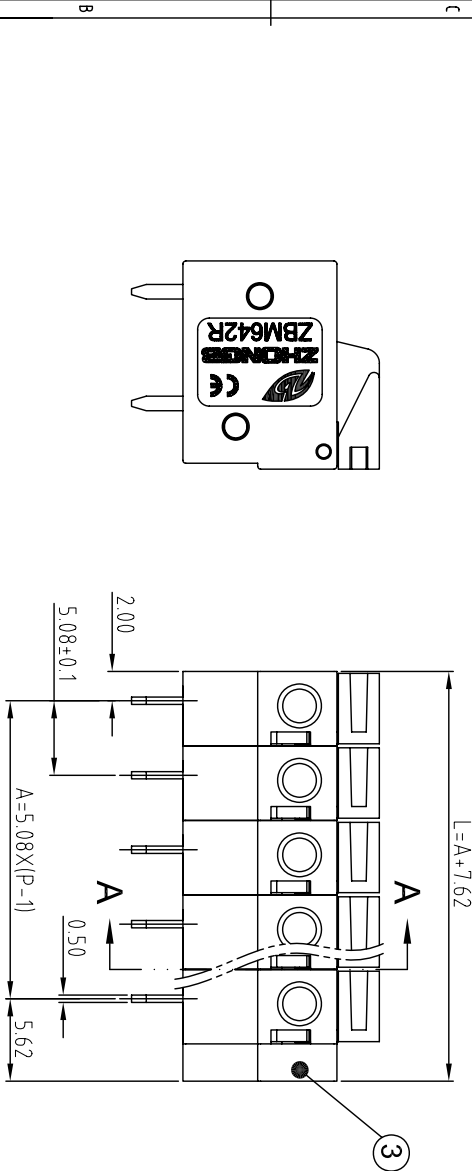
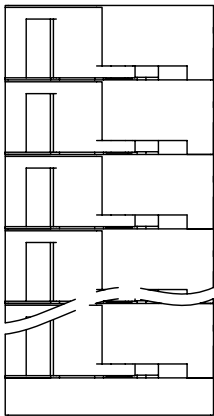


REV	CONTENT	CHK	DATE
V0.0	初版成	CXL	14.11.06

NOTES:

- 1.Rating:300V 10A;
- 2.Insulation Withstands Voltage: AC1600V/MIN;
- 3.Insulation Resistance:500M Ω or more at DC500V;
- 4.Using Temperature Range: -40°C/+105°C;
- 5.Suitable Electric Wire:14-22 AWG
- 6.insulation stripping length:7mm.
- 7.RoHS compliance

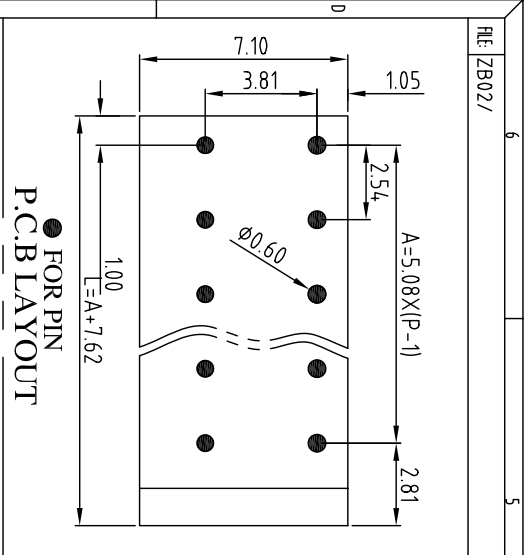

SECTION A-A

P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L	12.70	17.78	22.86	27.94	33.02	38.10	43.18	48.26	53.34	58.42	63.50	68.58	73.66	78.74	83.82	88.90	93.98	99.06	104.14	109.22	114.30	119.38	124.46
A	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84
in mm	Nominal dimension range																						
Total Pitch Tolerances																							

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	to	100	150	150	150
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.4	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.4	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.2	0.3	0.3	0.5

5	SPRING COIL	ZM642B0003	P	STAINLESS	
4	SOLDER PIN	ZM642B0002	P	BRASS	Sn Plated
3	END COVER	ZM642A2XXXX	1	PA66(U,94V-0)	GREEN
2	LEVER	ZM642A1XXXX	P	POM-V2	ORANGE
1	HOUSING	ZM642A3XXXX	P	PA66(U,94V-0)	GREEN
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	14.10.29	SIZE	A4 mm SHEET/OF 1 / 1
CHK.		DATE			
APP.		DATE			
 ZHONGBO  NAME ZBM642R-XP-X					
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD				DWGNO.	ZB-02-ZBM642RXPX