

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/25/05'		LJC 09/25/05'
B	长端子非针尾宽度0.6更改为0.8	LL 11/29/06'		

NOTES:




- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:

1024- X X X



CONTACT PLATING
F1: FULL GOLD FLASH
0: SECLECTIVE GOLD FLASH

MOUNTIING TYPE
R: R/A TYPE


No.OF CONTACTS
1*1-1*40
2*2-2*40

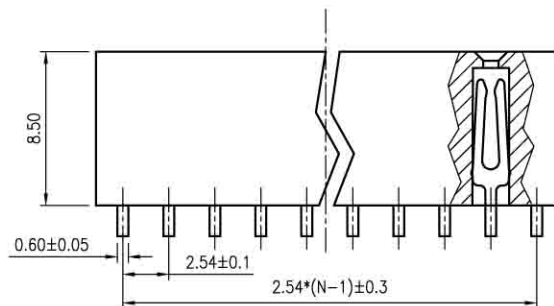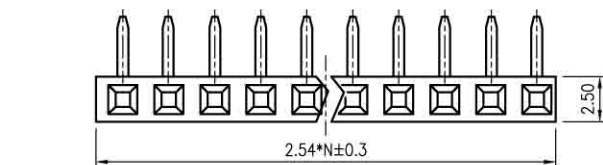

SINGLE ROW
N:NUMBER OF CONTACTS

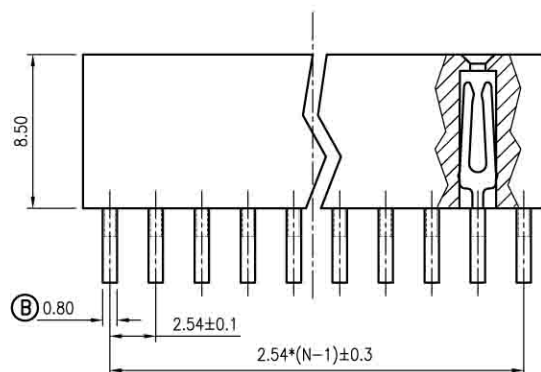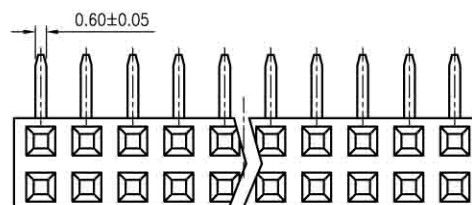

DUAL ROWS
N:NUMBER OF CONTACTS/2



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	FEMALE HEADER PITCH 2.54MM R/A TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1024 SERIES
.XX	±0.25	.XX	±2°			
2	CONTACT		COPPER ALLOY	DRAWING TYPE		
1	HOUSING		THERMOPLASTIC	CUSTOMER		
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED		
				SCALE	1:1	SHEET 1 OF 1
				DRAWING NO.	C-DS1024-XXXX	