


YES		
NO		

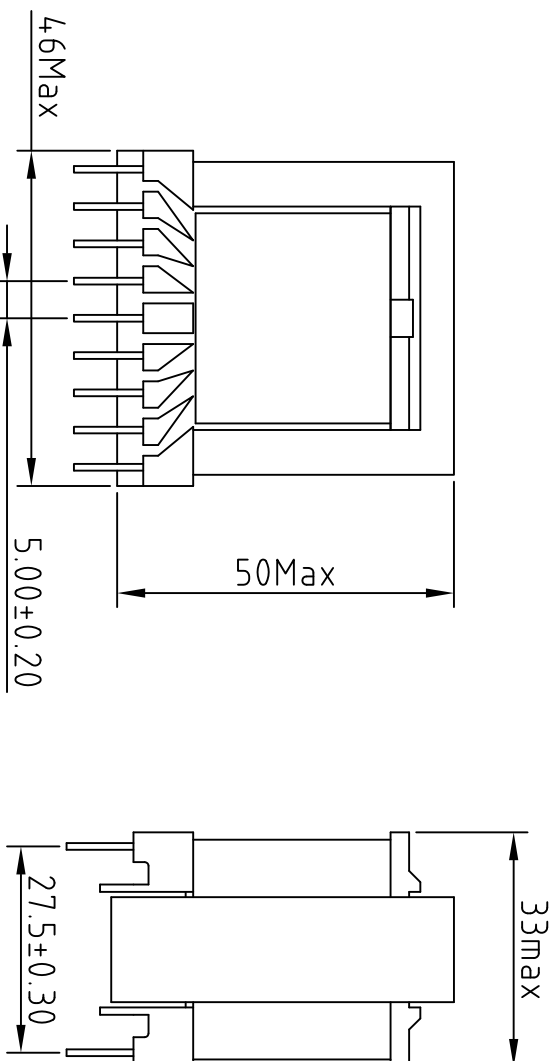

Unit: MM

-Winding Specification:

N1-----2-9 0.30X30Ts 2PLY TAPE

N2-----6-7 0.70X2pcsX15Ts

N3(屏閉)---6(0.50)- 0.05X24MM X1.2Ts 居中 2PLY TAPE

N4-10,11,12,13-14,15,16 0.30X10PCSX10TS 2PLY TAPE

N5-----17-18 0.3X2Ts 2PLY TAPE

N6(扉閉)---6(0.50)- 0.05X24MM X1.2Ts /居中 2PLY TAPE

N7-----7-8 0.70X2pcs X15Ts 2PLY TAPE

N8-----4-3 0.30X2Ts 2PLY TAPE

-Electric Specifications:

Inductance at 1KHz Room Temp


2-9 $3\text{mH} \pm 20\%$

-DCR


2-9: 650mΩ Max

注:

- 一、骨架頂部單槽對下針腳為1.9腳。
- 二、圍間膠帶均為2TS
- 三、2組的屏閉銅鉑膠帶均為約1.2圈，用0.5線焊接屏閉到第6腳。
- 四、線組收尾按原樣不需墊膠帶

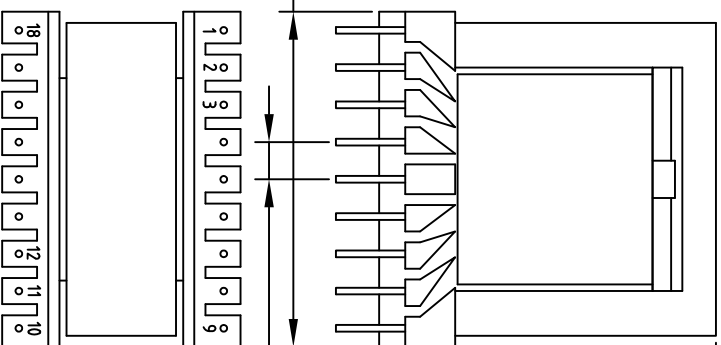

Bottom View 底視圖



Please Sign or Stamp to approve this sample. 請簽
回或蓋印以確認樣品。

Schematic		Mechanical		Part #	CVT-EE4220-SM0422016-3-1333	Megasan Elektronik				
3		2T	4-3 0.30X2Ts	Core磁芯	EE4220 PC40 單腳墊一層	Winding	Coil	Terminal #	Turns	L(uH)
4		2T	7-8 0.70X2 X15Ts	Bobbin骨架	EE4220 V9P9	1	N1	N/A	N/A	N/A
9		2T	6-銅鉤膠帶0.05X24MMX1.2TS	Pins針腳數	18/18	2	N2	N/A	N/A	N/A
2		2T	17-18 0.30X2Ts	Tape膠紙	27mm/1600mm, 20mm/350mm	3	N3	N/A	N/A	N/A
8		2T	10/11/12/13-14/15/16 0.30X10pC-X10TS	Wire銅線	2UEW-F 0.30/9g/0.7/22g	4	N4	N/A	N/A	N/A
7		2T	6-銅鉤膠帶0.05X24MMX1.2TS	Date日期:	09 DEC 2009	5	N5	N/A	N/A	N/A
6		2T	6-7 0.70X2 X15Ts	Draw #	Tel: 852-2774 1323	東日磁元有限公司				
			2-9 0.30X30Ts	JRL1333	Fax: 852-2774 1231					
					Contact: Jack Chan					