

项目 Mapx	变更内容 Modification	日期 Date	修改人 Draw	批准 Approve
------------	----------------------	------------	-------------	---------------

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)


原材料: Material:

- 塑壳: Housing:
Hing Temperature Thermoplastics,
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:
- 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Talls

端子四周镀50U”(MIN) 铜, 镀金区域镀100—200U”镀金1U”

- 外壳: Shell:
铜壳四周镀80U”(MIN) 铜

Nickel Plating

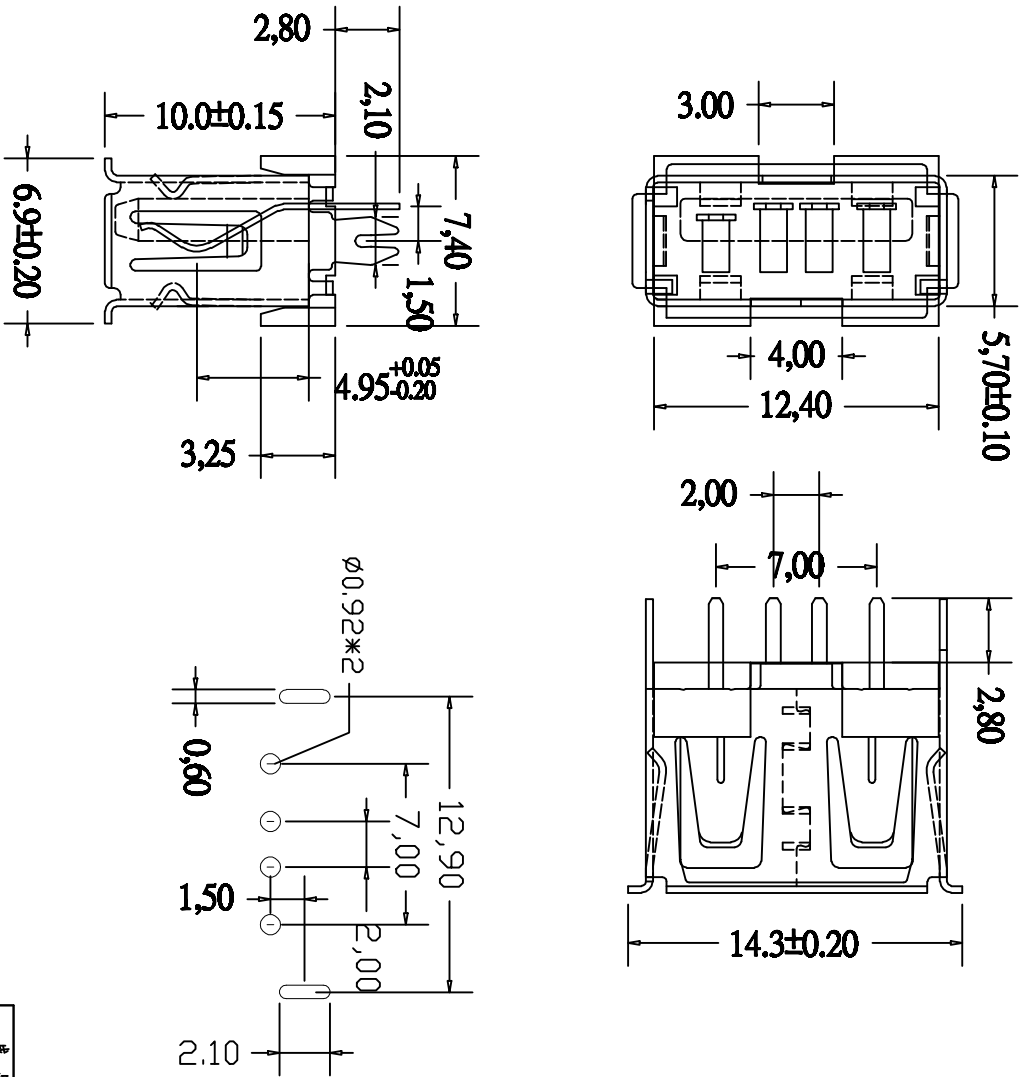

成品图 MANUFACTURE DWG		公差一覽表 TOLERANCE UNLESS OTHERWISE		日期 DATE		單位 UNIT		圖號 DRAWING		DWG NO.	
X±0.15	X±5°	DATE	2016.10.20	單位	MM	圖號		DWG NO.			
XX±0.05	.X±2°	審核		比例	1 : 1	設計		品名	規格		
XXX±0.02	.XX±1°	核准		角法				版本	頁數		
		APPROVE		VIEW				VER	AO		
									SHEET		
									PG1		