

APPROVED

SIGNATURE

DATE


REV.

ECN NO.



DATE

SIGN

DESCRIPTION



Conn.

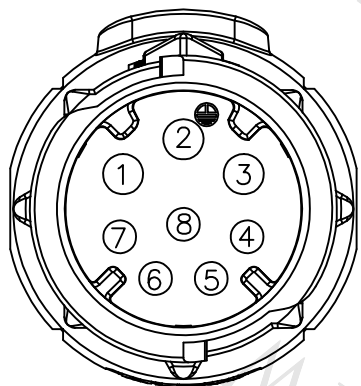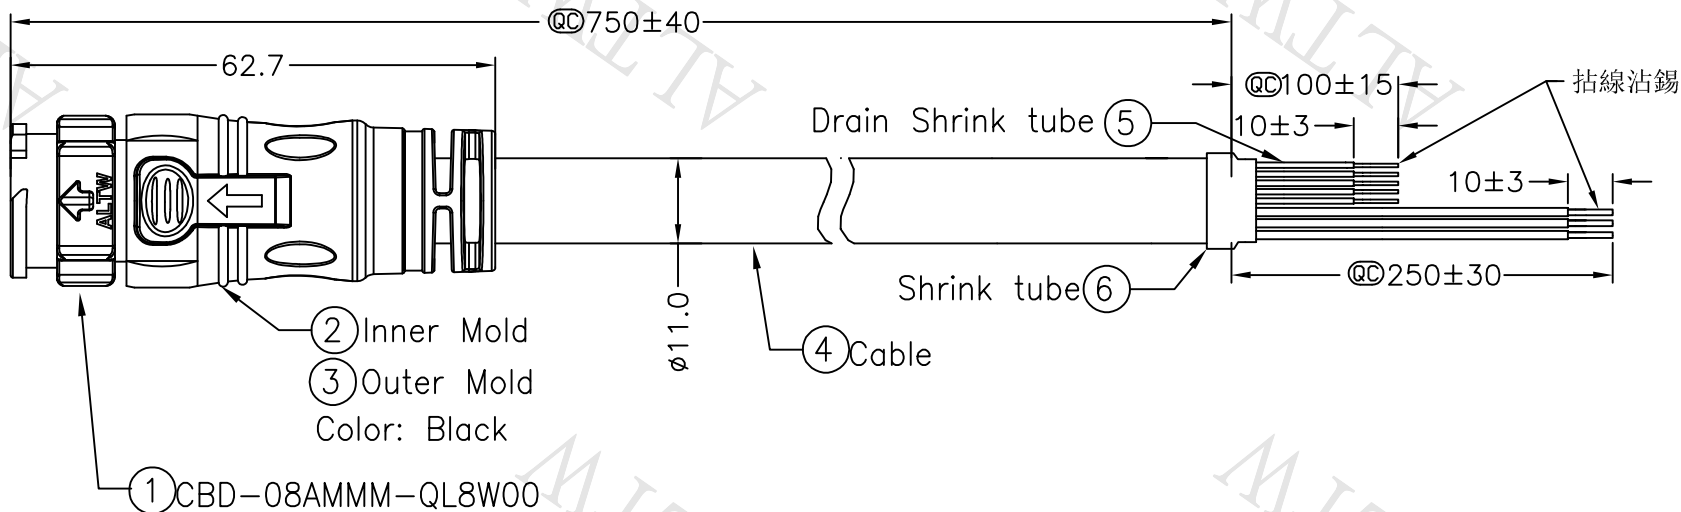
Conn.
Pin Assignments
Front View

8	Drain	(26AWG)	地線	Twist 對線
7	Blue	(26AWG)	藍	
6	Red	(26AWG)	紅	
5	Green	(26AWG)	綠	Twist 對線
4	White	(26AWG)	白	
3	Black	(16AWG)	黑	
2	Green	(16AWG)	綠	
1	White	(16AWG)	白	
Conn.		Wire Color		
		Pin Out		

Note:

- * @@Important Dimension To Check
- * Waterproof Rate: IP68(Mated,1M/24hr)
- * Working Voltage Rating:
Power AC/DC 300V
Data DC 30V
- * Working Current:
Power: 10A
Date: 05A
- * Housing: Nylon+GF,Black
- * Pin: Copper Alloy,Gold & Ni Plated
- * Cable: UL21996 3C*16AWG+(26#*2P+D+AL)+F+AL/MY,PVC Jacket,OD=11.0,Black

UNIT:mm



TITLE

X-Lok C Size Cable Molding
8Pin M Connector M Pin

SCALE

Free

SHEET

1 OF 1

REV.

01

SIZE

A4

QC

:Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

MCBD-08AMMM-QL8F01

DWG NO

MCBD-08AMMM-QL8F01

CUSTOMER

LT004070

DRAWN BY

Lingpeng

CHECKED BY

Mafei

APPROVED BY

Jerry

DATE

2017/10/17

DATE

2017/10/17

DATE

2017/10/17