

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/18/09'	~	LJC 12/18/09'
B	ADD P/N CODE	YCH 12/18/09'		

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms)
FOR 1 MINUTE.
1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

TEMPERATURE RANGE: -45°C~+105°C.

3. PART NUMBER: DS1013-01

4. PRODUCT NUMBER CODE:

DS1013-01- X X X X - X

Plating Leve(Full Gold Only):Ⓑ

3A: 0.8-1.2u"

AA: Level AA

A: Level A

B: Level 8

HOUSING COLOR

B: BLACK

W: WHITE

U: BLUE

A: GRAY

CONTACT PLATING

Si: FULL GOLD FLASH

MOUNTING TYPE

S: V/T TYPE




R: R/A TYPE

No.OF CONTACTS

06 08 10 14 16


20 26 30 34

40 50 60 64

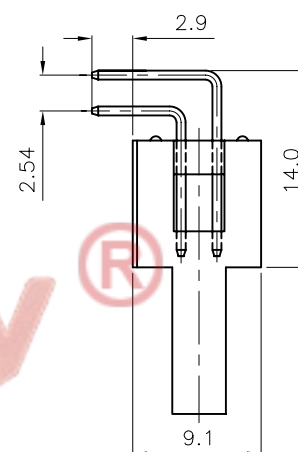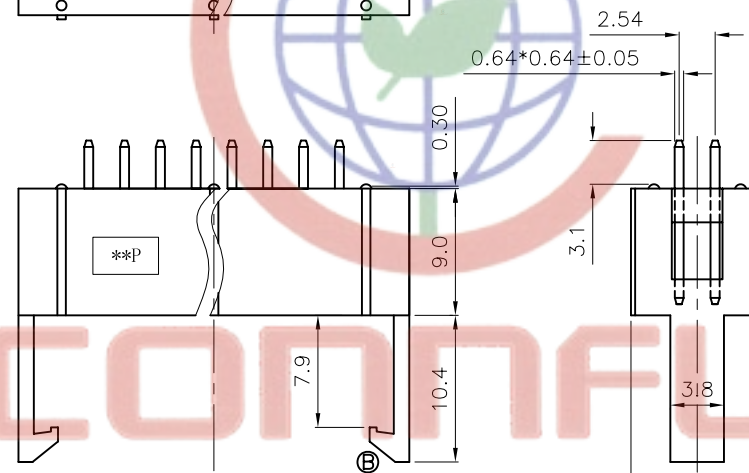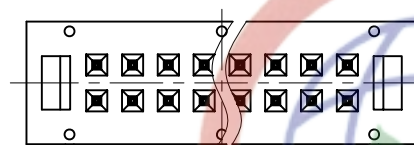


V/T TYPE

R/A TYPE

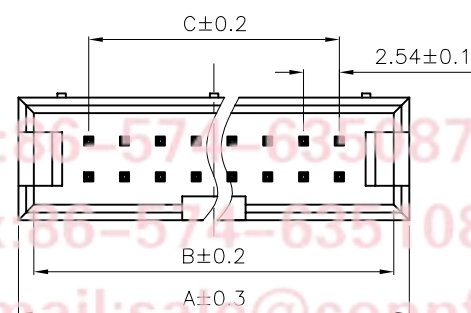

Dimension

Position	A	B	C				
10	20.30	18.10	10.16	30	45.70	43.50	35.56
12	22.84	20.64	12.70	34	50.78	48.58	40.64
14	25.38	23.18	15.24	40	58.40	56.20	48.26
16	27.92	25.72	17.78	50	71.10	68.90	60.96
20	33.00	30.80	22.86	60	83.80	81.60	73.66
26	40.62	38.42	30.48	64	88.88	86.68	78.74

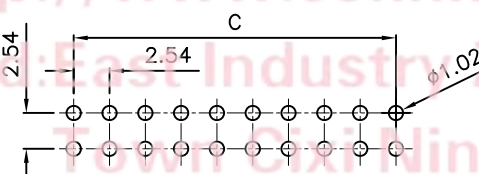

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1013-01-XXXX-X-B		

PROJECTION	UNIT	TITLE	BOX HEADER PITCH 2.54mm WITH LATCH TYPE
mm	mm		
SHEET SIZE	A4	SERIES	DS1013-01 SERIES
晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD			