

# Multi- Aperture cores (2861002402)



Part Number: 2861002402

67 MULTI- APERTURE CORE

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- − Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi- aperture cores are supplied burnished.

Our "Multi- Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

## Catalog Drawing 3D Model

Weight: 0.5 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	7	±0.25	0.276	_
В	6.2	±0.25	0.244	_
С	4.2	-0.25	0.16	_
Е	2.9	±0.10	0.114	_
Н	1.7	+0.20	0.071	






Figure 1

### Chart Legend

+ Test frequency

Typical Impedance	(Ω)
100 MHz	102
250 MHz <sup>+</sup>	136


Electrical Properties				
$A_L(nH)$	160 Min			

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

#### **Catalog Drawing**

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

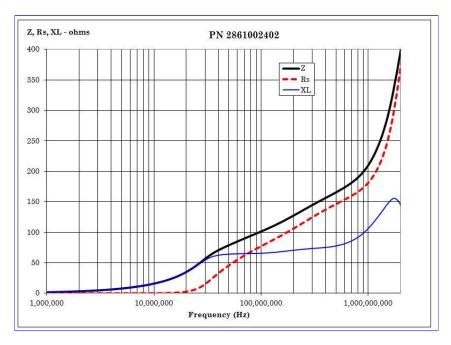

### CSV Download

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair- rite.com • www.fair- rite.com